



This manual is for reference and historical purposes, all rights reserved.

This creation is copyright© by M. Butkus, NJ, U.S.A.

These creations may not be sold or distributed without the expressed permission of the producer

I have no connection with any camera company

On-line camera manual library

If you find this manual useful, how about a donation of \$2 to:

M. Butkus, 29 Lake Ave., High Bridge, NJ 08829-1701

and send your e-mail address so I can thank you.

Most other places would charge you \$7.50 for a electronic copy or

\$18.00 for a hard to read Xerox copy.

This will allow me to continue this site, buy new manuals and pay their shipping costs.

It'll make you feel better, won't it?

If you use Pay Pal, go to my web site

www.orphancameras.com and choose the secure PayPal donation icon.

Bellows Focusing Attachment

Butkus, US

Nikon INSTRUCTION MANUAL

NOMENCLATURE

White indicator dot

Lens release button

Camera panel locking knob

Lens panel locking knob

Slide-copying adapter locking knob


Lens panel


Bellows

Rails

Lens panel sliding knob

Slide-copying adapter socket

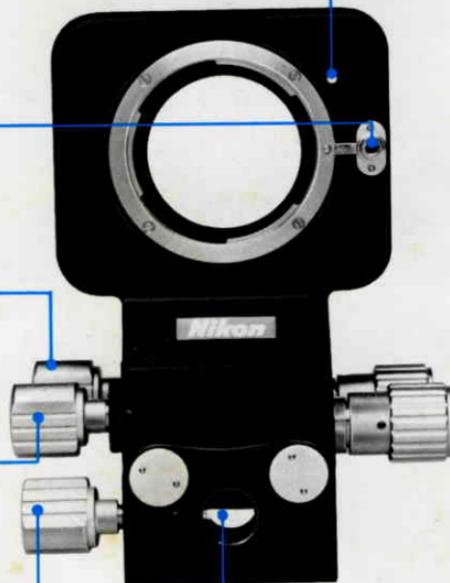

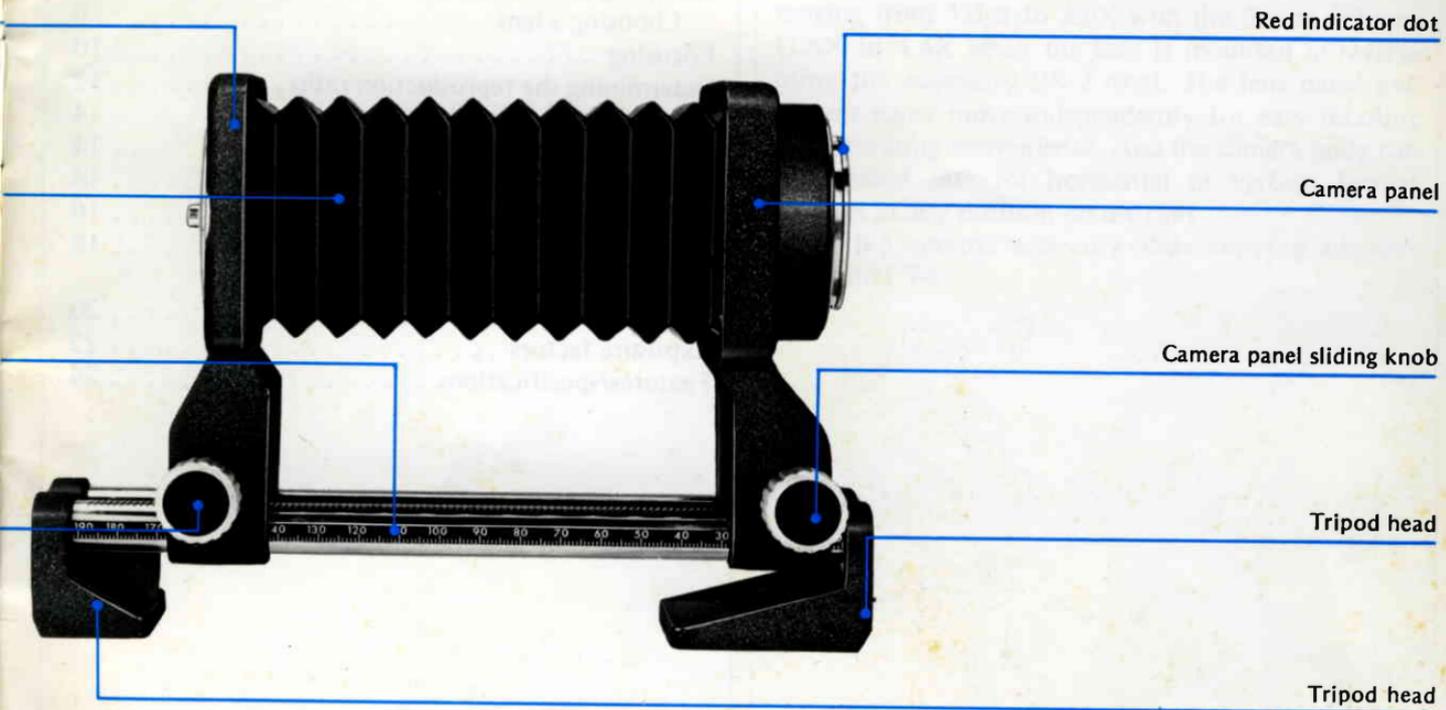

Red indicator dot

Camera panel

Camera panel sliding knob

Tripod head

Tripod head

CONTENTS

Foreword	5
Mounting the bellows on the camera	6
Mounting the lens	8
Choosing a lens	9
Focusing	10
Determining the reproduction ratio	12
Determining exposure	14
With built-in TTL meter.	14
When non-TTL meter is used	14
Accessories	16
Reproduction ratios obtainable with PB-5.	18
Reproduction ratios at different bellows extensions	20
Exposure factors	22
Features/specifications	26


FOREWORD

The PB-5 Bellows Focusing Attachment is a simplified version of the top-of-line PB-4 model. The bellows extends from 43 to 185mm for reproduction ratios ranging from 1:1.2 to 3.6X with the 50mm f/2 lens (1.6X to 4.4X when the lens is mounted in reverse using the accessory BR-2 ring). The lens panel and camera panel move independently for easy focusing and operating convenience. And the camera body can be rotated 90° for horizontal or vertical format pictures at any position on the rails.

The PB-5 accepts accessory slide copying adapters PS-5 and PS-4.

Butkus, US


MOUNTING THE BELLOWS ON THE CAMERA

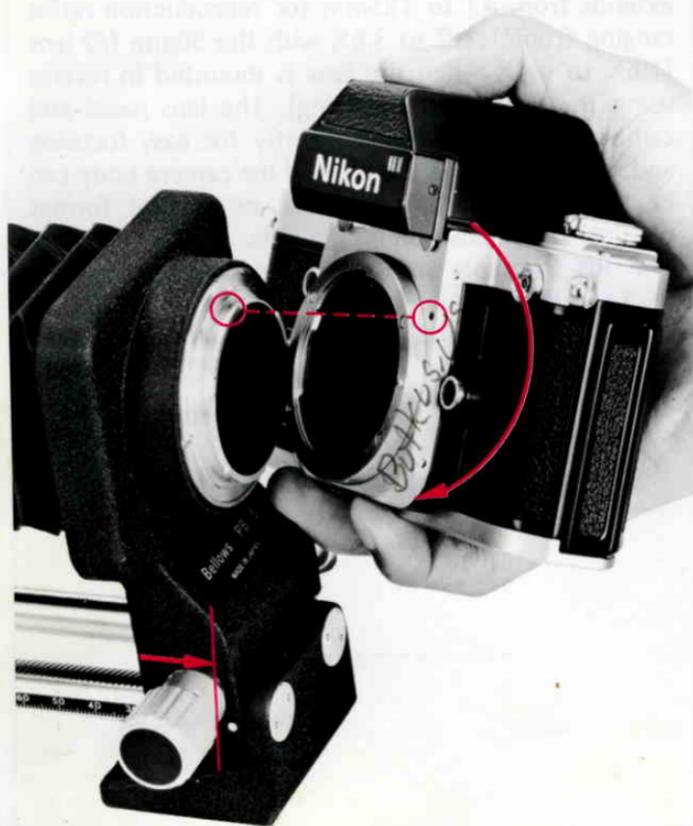

Loosen the locking knob on the camera panel and slide it back on the rails as far as it will go. Position the PB-5 in the camera's bayonet mount, lining up the red dot on the camera panel of the PB-5 with the black dot on the camera. Twist counterclockwise until it clicks into place.

The camera body can be rotated 90° for horizontal or vertical format photos at any position on the rails. Press the spring catch on the camera panel and turn the camera body counterclockwise until it clicks into place. To remove, depress the lens release button on the camera and twist the PB-5 clockwise.

Note: When used in the vertical position, the camera can be removed from the PB-5 in the normal manner regardless of the camera's position on the rails.

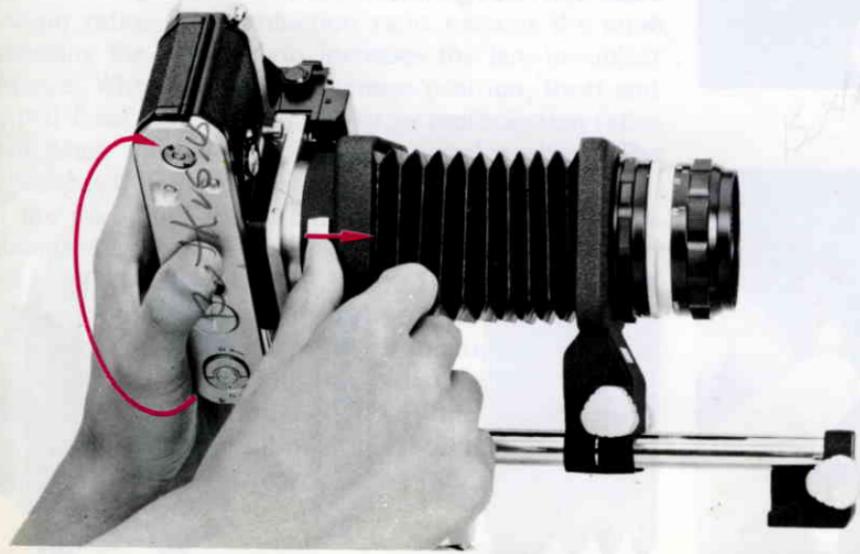

MOUNTING THE LENS



Position the lens in the bayonet mount on the lens panel, lining up the black dot on the lens with the white dot on the lens panel. Then twist the lens counterclockwise until it clicks into place.

To remove, press the lens release button on the lens panel and twist clockwise.

To mount the lens in reverse position, use the Nikon Macro Adapter Ring BR-2. The ring has a bayonet mount at one end that fits onto the PB-5, and a screw thread mount at the other to accept the lens. It can be used with any lens with 52mm attachment size.



Choosing a Lens

Though any of the Nikkor lenses from 20 to 300mm can be used with the PB-5, the Nikkor Auto 50mm f/2 and the Bellows-Nikkor 105mm f/4 are most commonly used. For critical closeups, the Micro-Nikkor-P Auto 55mm f/3.5 is an excellent choice.

For best results at reproduction ratios greater than 1:1, reverse the lens in its mount so that its front faces the film and its back is to the subject.

If the bellows extension remains the same, the shorter the focal length of the lens used, the greater the reproduction ratio. If reproduction ratio remains the same, increasing the focal length increases the lens-to-subject distance. When mounted in reverse position, short and normal focal length lenses give larger reproduction ratios than when they are mounted in normal position. The opposite is true for long lenses.

At the maximum aperture of the lens, depth of field is minimized and some marginal loss of image definition and illumination is likely to occur. Therefore the lens is usually focused at its maximum aperture, since this gives the brightest possible image on the focusing screen, then stopped down for making the exposure. However, the smallest aperture is not usually used either since this also results in image deterioration. The tables on pages 18 and 19 show the range of reproduction ratios possible with

any Nikkor lens mounted on the PB-5 in either normal or reverse position and recommended lens apertures for the best results.



FOCUSING

When the PB-5 is mounted between the camera and the lens, the automatic diaphragm control of the Nikkor Auto lens is lost. To focus on the brightest possible image on the focusing screen, open up the lens to its maximum aperture by turning the aperture ring counter-clockwise as far as it will go. However, if the accessory Extension Ring E2 is attached to the lens, semi-automatic diaphragm control is possible.

The PB-5 has two knurled knobs on the left hand side to control the back-and-forth movement of the camera panel or lens panel. The locking knobs on the right hand side are used to lock the assembly securely when focusing is completed. An additional knob located at the front end of the PB-5 is used to clamp the slide copying adapter in place.

Focusing can be done in two ways. First, lock the camera panel in place by tightening the locking knob on the right side. Then turn the knurled knob on the left side to move the lens panel back and forth along the rails until the subject is in sharp focus. Retighten the locking knob to lock the lens panel in position especially when the PB-5 is used in the vertical position.


An alternate method is to lock the lens panel in place at the extreme front end of the rails and move the camera panel backward until the subject is in focus. This method is faster, since lens-to-subject distance remains unchanged. It is also useful when the lens must be brought very close to the subject to focus sharply.

Close-ups and macrophotography pose several problems not encountered in general photography. One of these is sensitivity to vibration: the magnification of the image on the film makes even slight image displacement prominent and results in a blurred image. For best results, mount the entire set-up on a rigid tripod or support, and use a cable release to trip the shutter.


An unbalanced set-up may result in vibration. To avoid this, the PB-5 has an extra tripod socket beneath the lens panel so that the set-up can be balanced on a tripod even when a long lens is used or when the set-up is shifted forward.

Note: Type B, E or M focusing screen is recommended when the PB-5 is used with the Nikon F or F2, since the central range-finder area of the standard Type A screen blacks out at apertures smaller than $f/4.5$. If the Nikkormat is used, focus on the matte area surrounding the central focusing circle.

First method

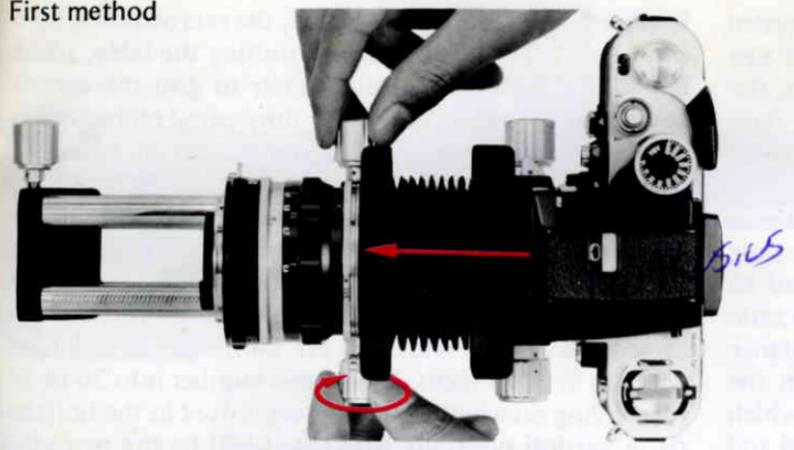

Second method

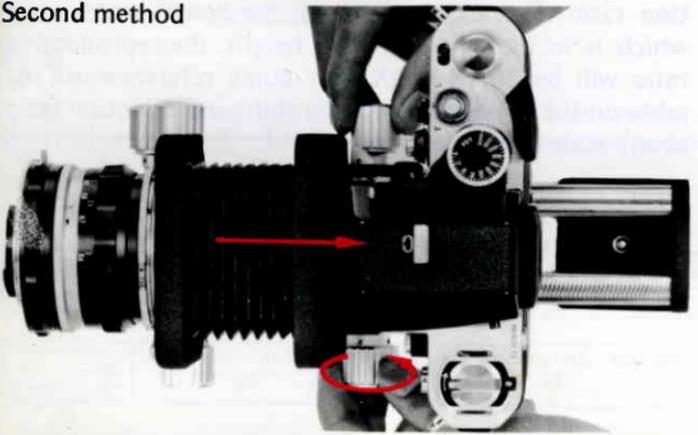

DETERMINING THE REPRODUCTION RATIO


Reproduction ratio is the ratio of the image size recorded on film to the actual size of the subject. At life-size magnification, for example, it is 1 : 1. Furthermore, the subject and image sizes are proportional to their respective distances from the lens. If lens-to-film distance increases, lens-to-subject distance decreases.

You can find out the reproduction ratio for a particular lens-to-film distance using the PB-5's millimeter scale engraved on the rail. The scale can also be used to pre-adjust the bellows to give a desired reproduction ratio. To determine the reproduction ratio, set the distance scale on the lens being used at infinity. Focus on the subject, then read off the numbers on the scale which appear next to the outer edges of the camera panel and lens panel. Subtract the smaller number from the larger one to find the actual bellows extension in mm and consult the table on pages 20 and 21 to find the reproduction ratio for the lens in use at that amount of bellows extension. For example, if the outer edge of the lens panel is at 140mm and the outer edge of the camera panel is at 44mm, the bellows extension equals $140 - 44 = 96$ mm. If the lens used is the 50mm f/2 mounted in reverse position, the table gives 2.5X as the reproduction ratio.


By reversing the above procedure, the reproduction ratio can be predetermined. After consulting the table, adjust the PB-5's camera and lens panels to give the correct amount of bellows extension for the desired reproduction ratio. Then focus by moving the subject or move the entire assembly back and forth until the subject is in sharp focus.

Another simple method of determining reproduction ratio is by using the scale on the opposite page. Place the scale in the same plane as the subject, look through the camera viewfinder and read off the length of the area which is in sharp focus. Divide this number into 36 or 24 (depending on whether the camera is used in the horizontal or vertical position). The result will be the reproduction ratio. For example, if the horizontal scale image which is in focus is 18mm in length, the reproduction ratio will be $36/18 = 2X$. For quick reference use the table on the opposite page to find the reproduction ratio at any scale coverage.

Note: When using a Nikkormat camera, the reproduction ratio obtained by this method must be multiplied by 0.9 owing to its smaller viewfinder area.

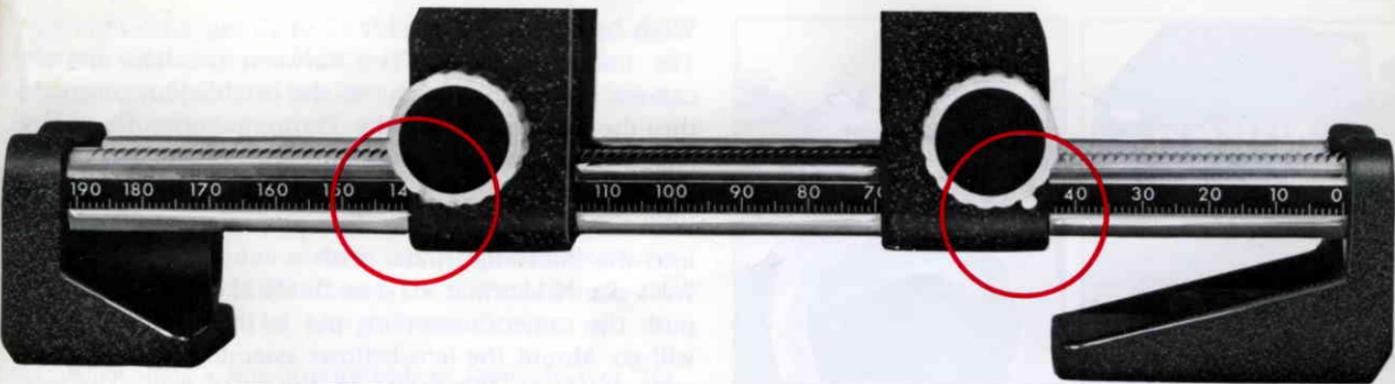

Scale




Lengthwise reading (mm)	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Reproduction ratio	12X	9	7.2	6	5.1	4.5	4	3.6	3.3	3	2.8	2.6	2.4	2.3	2.1	2	1.9	1.8	1.7	1.6	1.5	1.4	1.3	1.2					

Lengthwise reading (mm)	32	33	34	35	36	37	38	39~42	43~48	49~55	56~65	66~80	81~103	104~144	145~240	241~380
Reproduction ratio	1.1	×					1	0.9	0.8	0.7	0.6	0.5	0.4	0.3	0.2	0.1

DETERMINING EXPOSURE



Nikon F or F2-series cameras

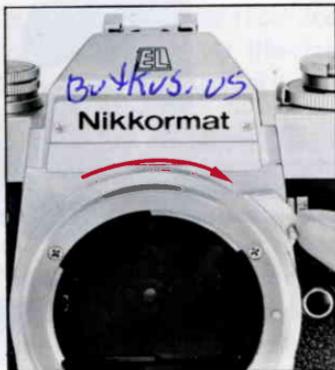

Nikkormat cameras

With built-in TTL meter

The insertion of the PB-5 between the lens and the camera breaks the linkage of the lens diaphragm to the thru-the-lens meters of the Photomic-series finders or Nikkormat cameras. However, these meters can still be used to measure exposure via the stop-down method. With the Photomic finders, first push the coupling pin up into the Photomic finder with a coin or similar object. With the Nikkormat FT_N or the Nikkormat EL camera, push the camera's coupling pin to the right as far as it will go. Mount the lens/bellows assembly on the camera and switch on the meter in the usual way. The next procedure for each camera is as follows:

Nikon F2 Photomic and Nikkormat FT_N cameras

Select the desired shutter speed and stop down the lens manually until the meter needle in the viewfinder is centered.

Nikon F2S Photomic camera

Select the desired shutter speed and stop down the lens manually until the two signal lights glow.

Nikkormat EL camera

Set the shutter speed dial at "A" (Automatic) and turn the aperture ring until the black needle in the viewfinder indicates a shutter speed appropriate to the subject.

When non-TTL meter is used

If a separate light meter is used, exposure compensation is necessary at reproduction ratios greater than 1 : 10.

The graphs on pages 22 to 25 show exposure factors and exposure corrections in f-stops for any Nikkor lens at any aperture. Readjust the lens diaphragm according to the indicated numbers.

To calculate exposure compensation in terms of shutter speed rather than f-stops find the exposure factor from the graphs and multiply it by the exposure time. For example, if normal exposure at 1 : 1 reproduction ratio with the 50mm f/2 is 1/8 second, the corrected exposure will be 1/8 multiplied by 4, or 1/2 second.

Note: When using a lens of retrofocus or telephoto type, the difference in pupillary magnification must be taken into account to establish the correct exposure. The pupillary magnification is the ratio of the exit pupil diameter to that of the entrance pupil. The following formula is used to calculate the exposure factor when a retrofocus or telephoto type lens is used in normal position:

$$\text{Exposure factor} = (1 + M/\Psi)^2$$

(where Ψ = pupillary magnification)

When the lens is in reverse position:

$$\text{Exposure factor} = 1/\Psi^2 (1 + \Psi M)^2$$

To avoid complicated calculations, use the graphs on pages 22 to 25 to determine correct exposure in aperture values. The graphs are computed to take into account the pupillary magnification.

ACCESSORIES

Eyepiece Magnifier

Fits the threaded eyepiece of the Nikon F or F2, Nikkormat or Photomic-series finder. Magnifies the central finder area 2X for greater accuracy in viewing and focusing.

Right-Angle Viewing Attachment

Screws into the threaded eyepiece of the Nikon F or F2, Nikkormat or Photomic-series finder and offers the same advantages as the waist-level finder.



6X Focusing Finder

This finder magnifies the entire viewing field six times for pinpoint focusing in closeups, macrophotography and other applications where critical focusing is essential. Eyesight adjustment from -5 to $+3$ diopters is possible.



Repro-Copy Outfit PF-2

Sturdy and convenient set-up for copying documents, books and other small objects which are more or less flat.



Extension Ring Set K


Consists of five rings used in various combinations between the PB-5 and lens to provide extra extensions ranging from 5.8 to 46.6mm.

Extension Ring E2

Used with the PB-5 to increase lens-to-film distance. Offers semi-automatic diaphragm control for easier focusing and composing and also serves as a lens hood.

Slide Copying Adapters PS-4 & PS-5

Both attach to the front of the PB-5 for duplicating 35mm transparencies. The PS-4 (shown below) provides horizontal and vertical shifts which facilitate cropping.

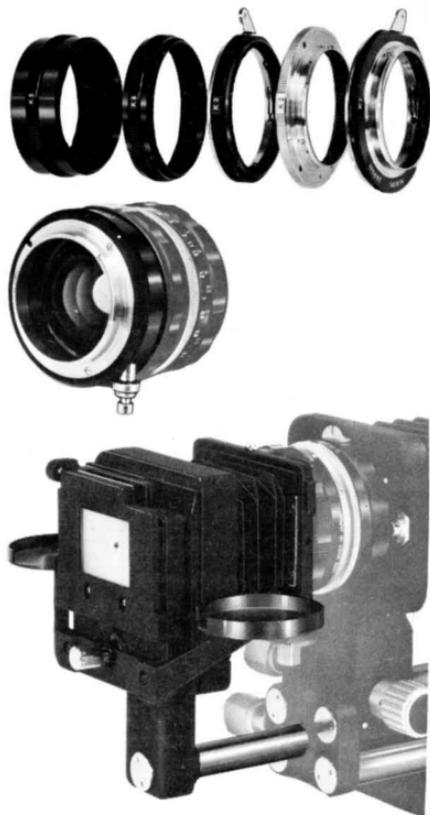

REPRODUCTION RATIOS OBTAINABLE WITH PB-5

Note: Lens set at infinity

Lens	Position	Reproduction Ratio Range												Remarks		
		12X	11X	10X	9X	8X	7X	6X	5X	4X	3X	2X	1X		1/2X	
20mm f/4	Normal											0	0.2		The further the lens is stopped down the better the image quality. Unsuitable for copying.	
	Reverse	3.6							3.9							Image quality is best at f/8 and deteriorates at smaller apertures.
24mm f/2.8	Reverse		3.7						4.0							Image quality is best at f/8 and deteriorates at smaller apertures. Cannot be used in normal position.
26mm f/2 26mm f/3.5 28mm f/2.8 28mm f/4 PC	Normal											0	0.8		The further the lens is stopped down, the better the image quality. Unsuitable for copying.	
	Reverse			4.5					5.0						Image quality is best at apertures from f/8 to f/11, and deteriorates at smaller apertures.	
35mm f/2.8	Normal								0					2.3	The further the lens is stopped down, the better the quality.	
	Reverse					4.0				4.7					Image quality is best at f/8 and deteriorates at smaller apertures.	
35mm f/2	Normal									0				2.2	Same as above	
	Reverse					4.2				4.9						
35mm f/1.4	Normal										0			1.8	The further the lens is stopped down, the better the image quality.	
	Reverse					4.7					5.4				Image quality is best at f/11 and deteriorates at smaller apertures.	
35mm f/2.8 PC	Normal							0.2				2.5			corner image quality deteriorates at low reproduction ratios. Unsuitable for copying.	
	Reverse					4.8					5.5				Image quality is best at f/8 and deteriorates at smaller apertures.	
45mm f/2.8 GN	Normal									3.9				7.7	Image quality is best at apertures from f/8 to f/11 and deteriorates when the lens is stopped down further than f/11.	
	Reverse							4.6				6.8			Image quality is best at f/8 and deteriorates at smaller apertures.	
50mm f/2	Normal										2.5			7.2	The further the lens is stopped down, the better the image quality.	
	Reverse							4.8				6.8			At high reproduction ratios corner image quality deteriorates somewhat when the lens is stopped down further than f/8.	

Note: Figures at both ends of the lines indicate working distance in cm — distance between subject and front edge of the lens barrel.

Note: Lens set at infinity

Lens	Position	Reproduction Ratio Range											Remarks					
		7X	6X	5X	4X	3X	2X	1X	1/2X	1/3X	1/4X	1/5X		1/10X	1/∞X			
50mm f/1.4	Normal				1.0													The further the lens is stopped down, the better the image quality. Unsuitable for copying.
	Reverse			5.0														Corner image quality deteriorates at low reproduction ratios.
55mm f/1.2	Normal				1.4													Suitable for normal close-ups but unsuitable for copying. Since corner image quality is poor, it is advisable to stop down the lens as far as possible.
	Reverse			5.1														Corner image quality deteriorates at low reproduction ratios.
55mm f/3.5 Micro-P	Normal				1.8													Image quality is best at f/8 and deteriorates at smaller apertures.
	Reverse			5.5														
85mm f/1.8	Normal						9.0											The further the lens is stopped down, the better the image quality.
	Reverse						7.8											Corner image quality deteriorates at low reproduction ratios.
105mm f/2.5	Normal						16											The further the lens is stopped down, the better the image quality.
	Reverse						10											Image quality is good at high reproduction ratios but corner image quality deteriorates at infinity.
105mm f/4 Bellows	Normal						15											The further the lens is stopped down, the better the image quality.
135mm f/3.5	Normal						25											The further the lens is stopped down, the better the image quality.
	Reverse						25											Image quality is good at high reproduction ratios but corner image quality deteriorates at infinity.
135mm f/2.8	Normal						22											Same as above.
	Reverse						23											
180mm f/2.8	Normal						33											The further the lens is stopped down, the better the image quality.
200mm f/4	Normal						56											The further the lens is stopped down, the better the image quality.
300mm f/4.5	Normal						103											The further the lens is stopped down, the better the image quality.

REPRODUCTION RATIOS AT DIFFERENT BELLOWS EXTENSIONS

Note: Lens set at infinity




Lens	Position	Read off Values on Scale																	
		50	60	70	80	90	100	110	120	130	140	150	160	170	180	190			
20 mm f/4	Normal	2.1X(0.2)	2.5X(0)																
	Reverse	5X(3.9)	6X(3.8)		7X(3.7)	8X(3.7)	9X(3.7)	10X(3.7)	11X(3.6)	12X(3.6)									
24 mm f/2.8	Reverse	4.5X(4)	5X(3.9)	6X(3.8)	7X(3.8)	8X(3.7)	9X(3.7)	10X(3.7)											
28 mm f/2 28 mm f/3.5 28 mm f/2.8 28 mm f/4 PC	Normal	1.5X(0.6)	2X(0.1)																
	Reverse	4X(4.9)	4.5X(4.8)	5X(4.8)	5.5X(4.7)	6X(4.7)	6.5X(4.6)	7X(4.6)	7.5X(4.6)	8X(4.6)	8.5X(4.5)								
35 mm f/2.8 35 mm f/2 35 mm f/2.8 PC	Normal	1.2X(2.2)	1.5X(1.6)	2X(1)	2.5X(0.6)	3X(0.4)	3.5X(0.2)	4X(0.1)	4.5X(0)										
	Reverse	3X(4.9)	3.5X(4.7)	4X(4.6)	4.5X(4.5)	5X(4.4)	5.5X(4.4)	6X(4.3)	6.5X(4.3)										
35 mm f/1.4	Normal		5X(1.2)	2X(0.6)	2.5X(0.2)	3X(0)													
	Reverse	3X(5.4)	3.5X(5.2)	4X(5.1)	4.5X(5.0)	5X(4.9)	5.5X(4.9)	6X(4.8)	6.5X(4.8)										
45 mm f/2.8 GN	Normal	1X(7.4)	1.5X(5.9)	2X(5.1)	2.5X(4.6)	3X(4.3)	3.5X(4.1)												
	Reverse	1.5X(6.7)	2X(5.9)	2.5X(5.4)	3X(5.1)	3.5X(4.9)	4X(4.7)												
50 mm f/2	Normal	1X(6.4)	1.5X(4.7)	2X(3.8)	2.5X(3.3)	3X(3)	3.5X(2.7)												
	Reverse	1.6X(6.9)	2X(6.3)	2.5X(5.8)	3X(5.4)	3.5X(5.2)	4X(5.1)	4.3X(4.9)											
50 mm f/1.4	Normal	1X(4.6)	1.5X(2.9)	2X(2)	2.5X(1.5)	3X(1.2)	3.5X(0.9)												
	Reverse	2X(6.3)	2.5X(5.8)	3X(5.4)	3.5X(5.2)	4X(5)	4.5X(4.8)												




Note: Lens set at infinity

Lens	Position	Read off Values on Scale																	
		50	60	70	80	90	100	110	120	130	140	150	160	170	180	190			
55 mm f/1.2 55 mm f/3.5 Micro-P	Normal																		
	Reverse																		
85 mm f/1.8	Normal																		
	Reverse																		
105 mm f/2.5	Normal																		
	Reverse																		
105 mm f/4 Bellows	Normal																		
135 mm f/3.5 135 mm f/2.8	Normal																		
	Reverse																		
180 mm f/2.8	Normal																		
200 mm f/4	Normal																		
300 mm f/4.5	Normal																		


Figures in parentheses indicate distance from the subject plane in focus to the lens barrel edge in cm.

EXPOSURE FACTORS

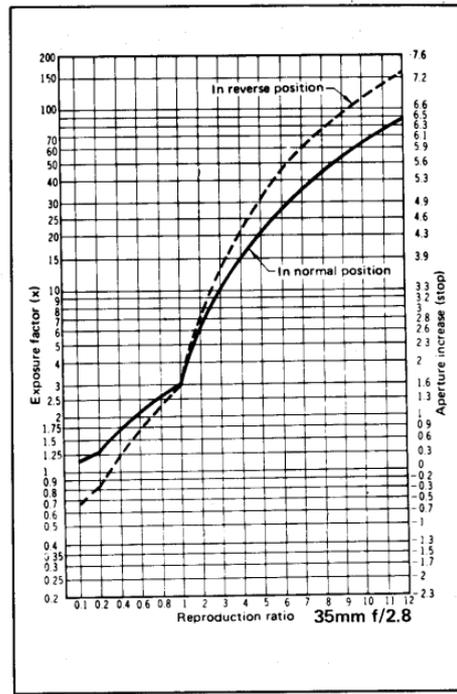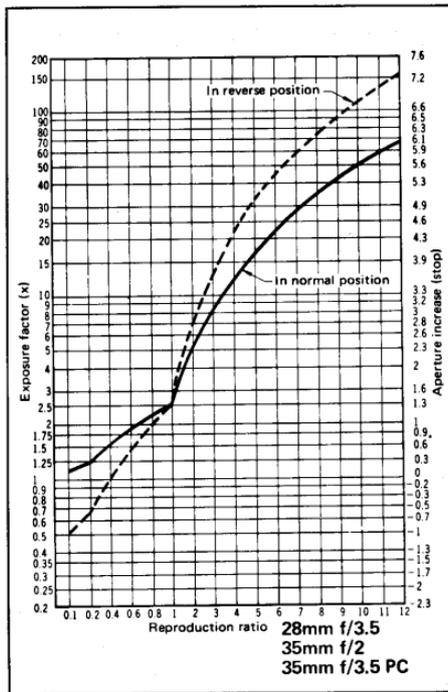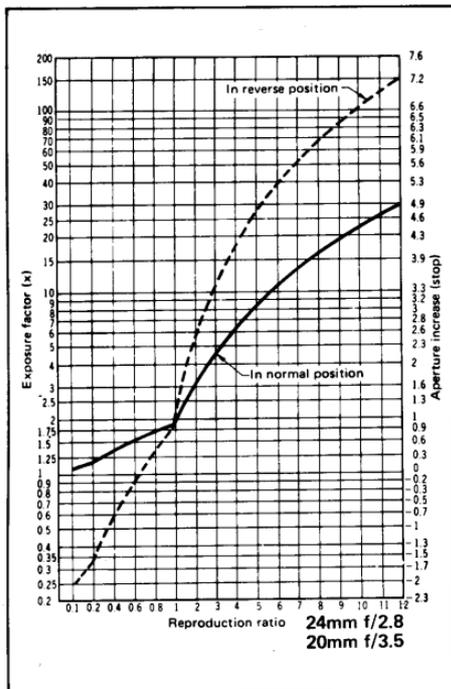


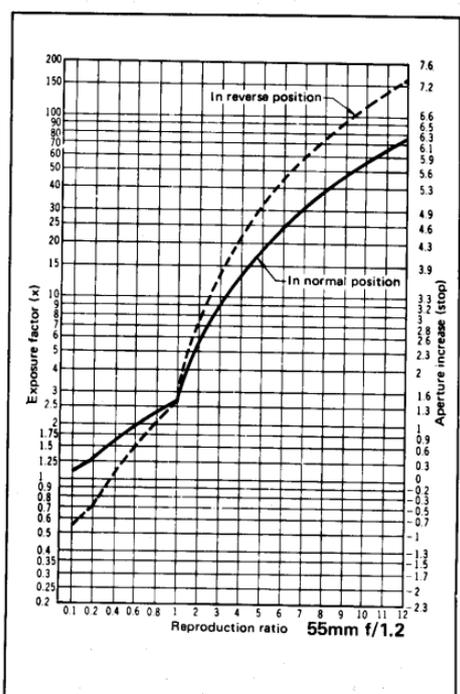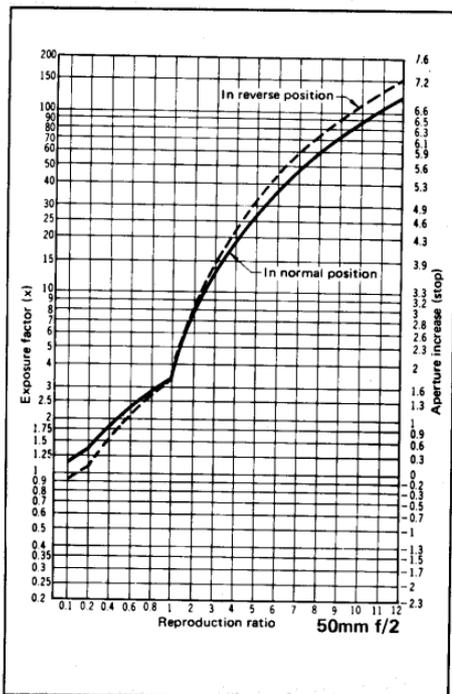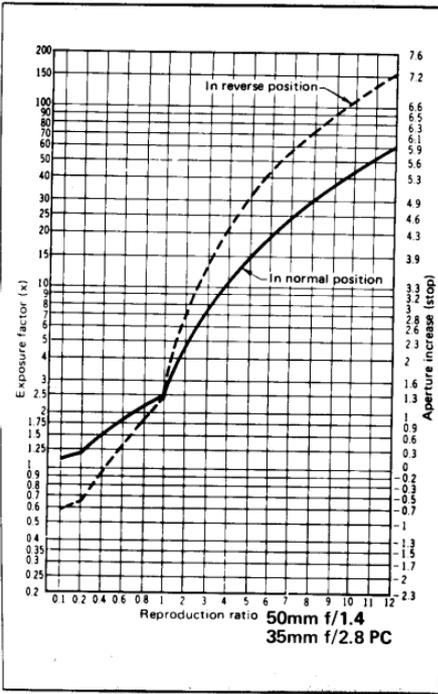


EXPOSURE FACTORS — continued

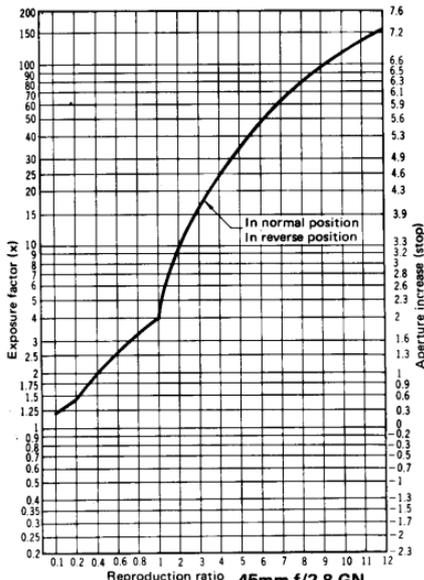



45mm f/2.8 GN
55mm f/3.5 Micro-P
105mm f/4 Bellows
105mm f/2.5

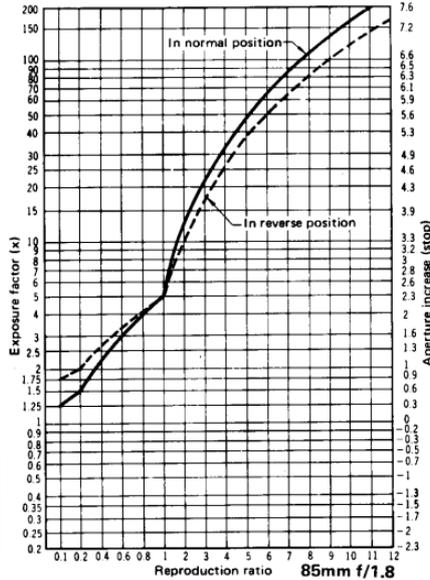

85mm f/1.8

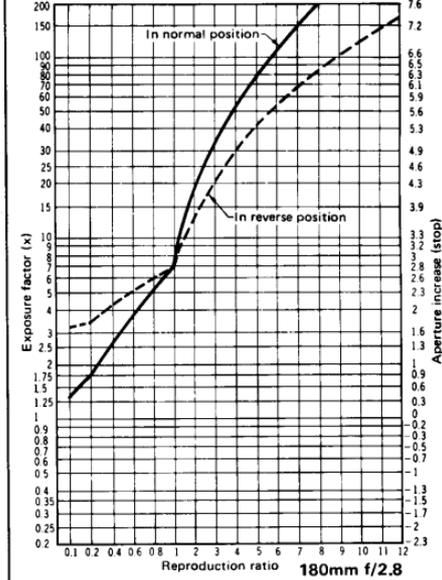

180mm f/2.8

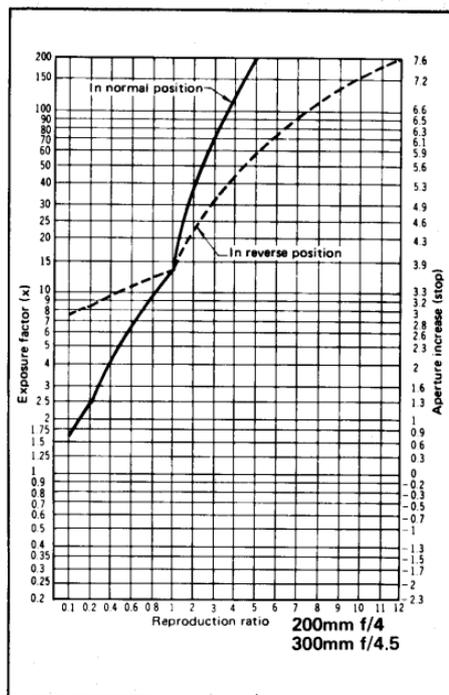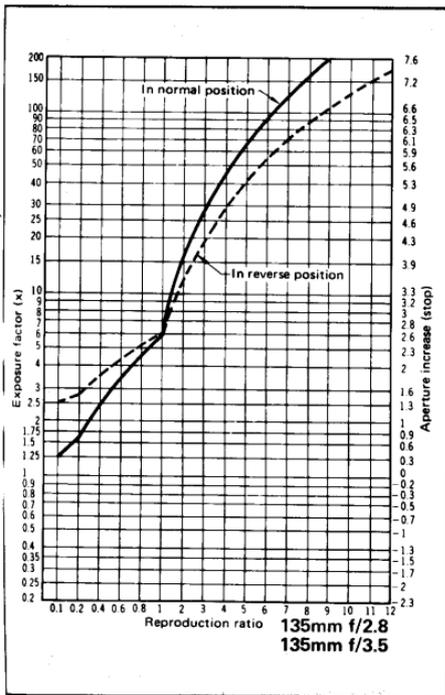

FEATURES/SPECIFICATIONS

Bellows Extension:	43mm to 185mm; this represents reproduction ratio from 1 : 1.2 to 3.6X with 50mm f/2 in normal position and from 1 : 1.6 to 4.4X in reverse position
Usable Lenses:	20mm f/4 through 300mm f/4.5, plus Zoom-Nikkor Auto 43–86mm f/3.5
Dimensions:	209mm x 109mm x 144mm
Weight:	950g