

CCS Technical Documentation

RH-17 Series Transceivers


Disassembly

ESD Protection




Remove the six screws using a nonconductive screwdriver.


Remove the battery cover (B-cover)

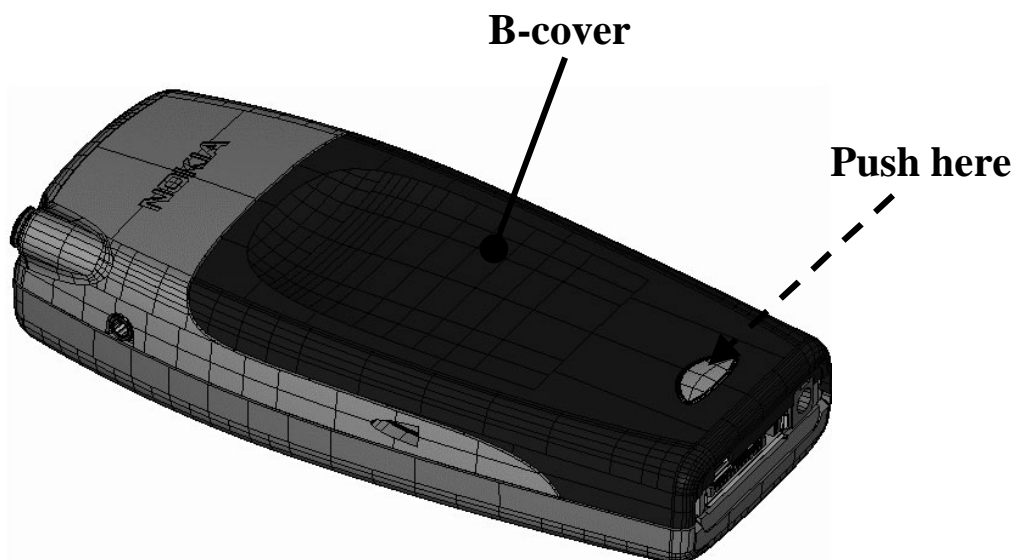


- 1 Turn the phone off.
- 2 Remove the battery cover (B-cover) by pushing down on the release button.
- 3 Remove battery.

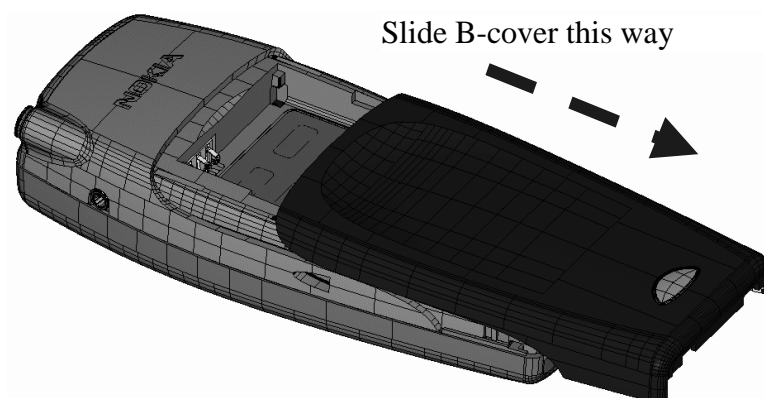


Remove A-cover

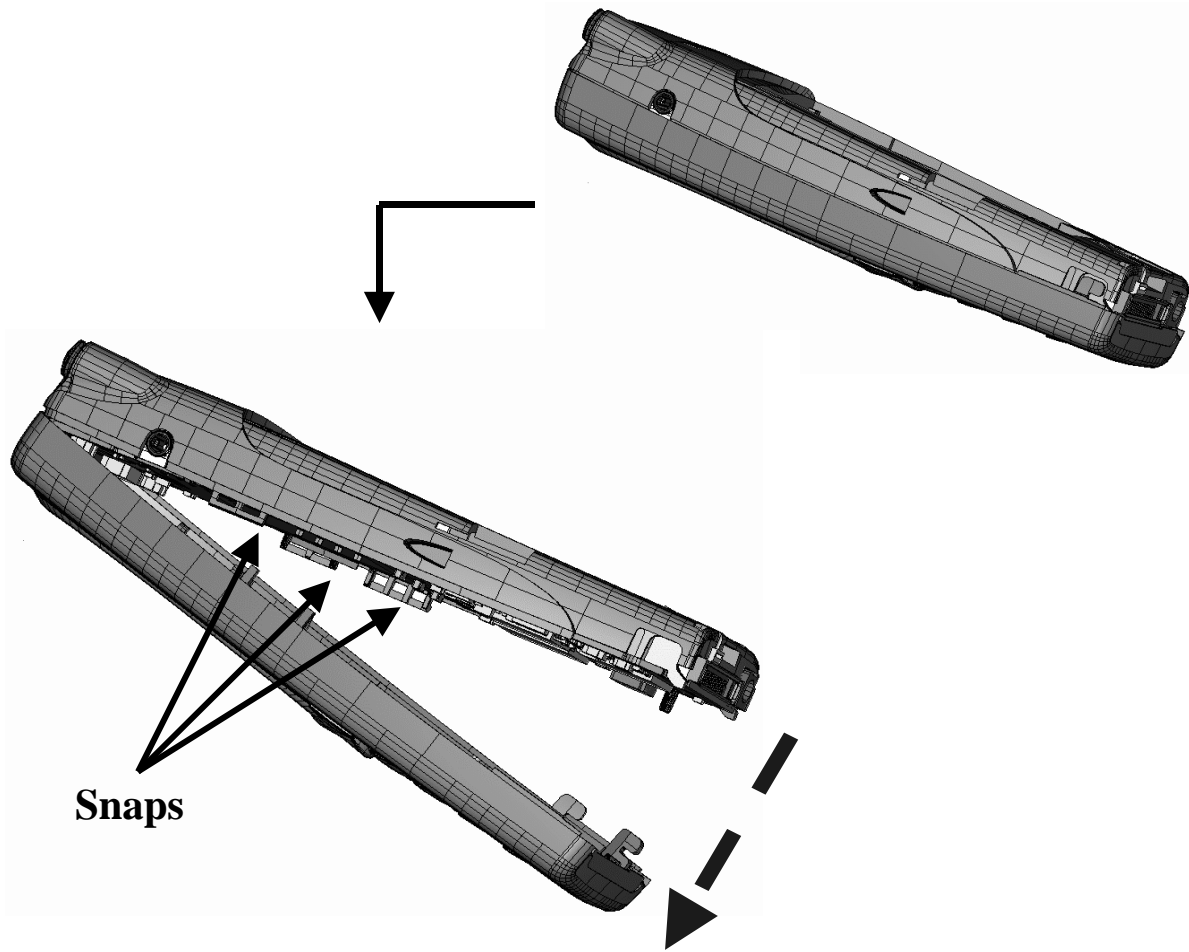


Remove screws using a nonconductive screwdriver

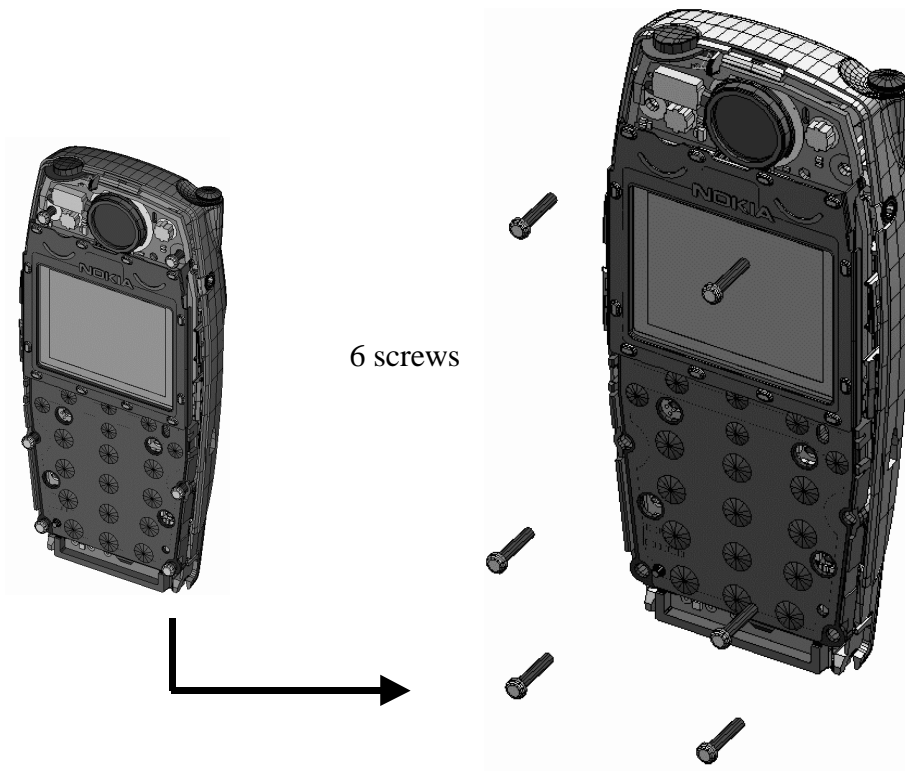


Remove LCD Assembly

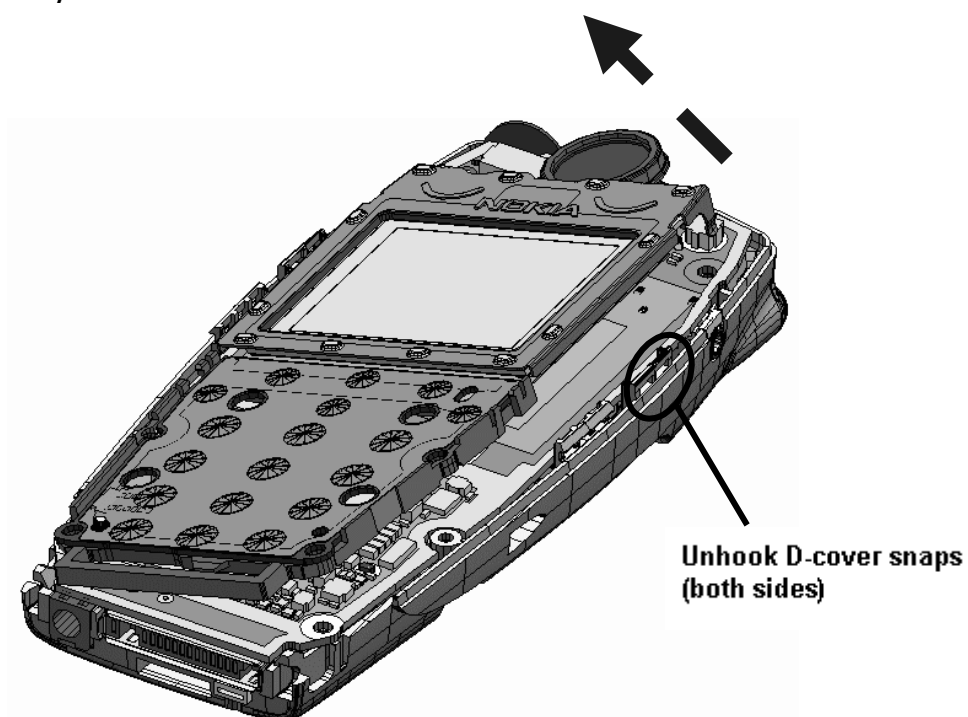


Separate PWB from D-cover Assembly

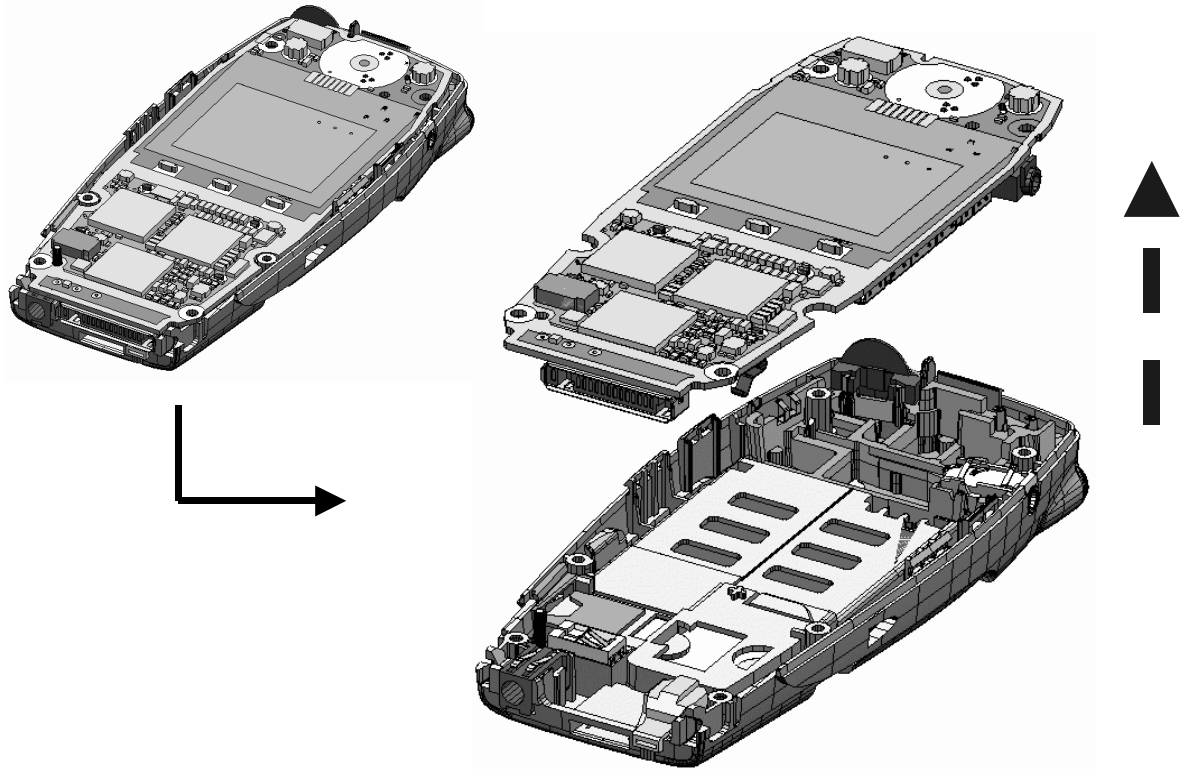

Power Key Removal

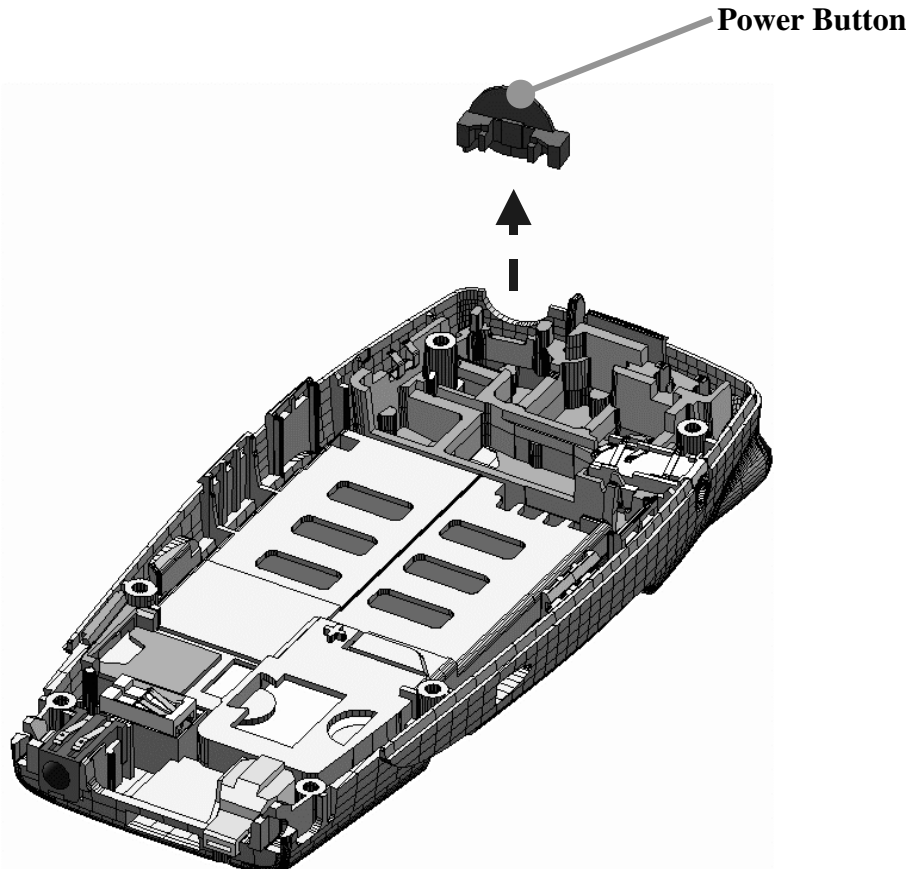

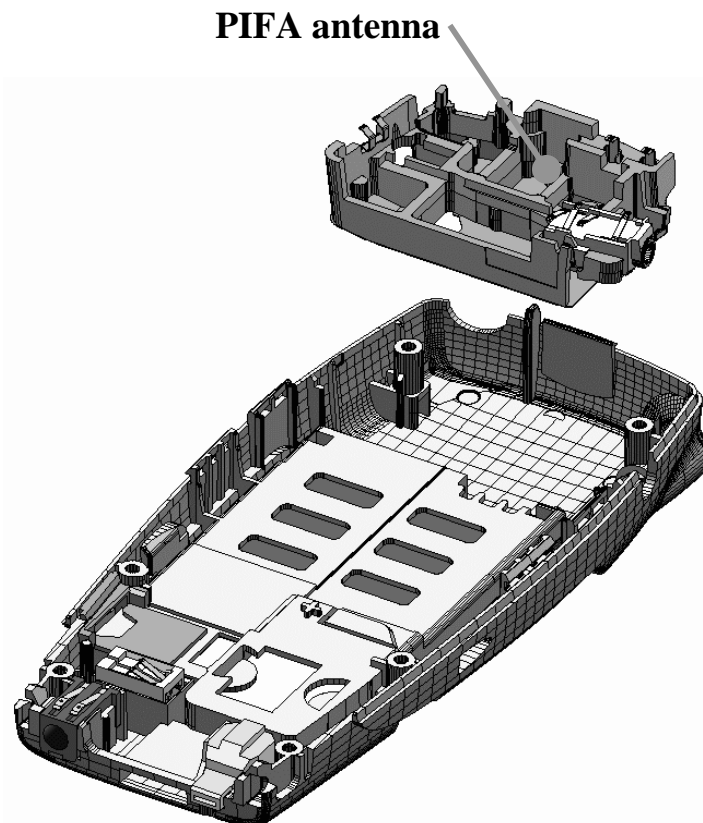PIFA Antenna Removal**Other Item Removal**

- Headset jack (in PIFA antenna)
- Whip assembly
- DC jack
- Microphone
- Buzzer gasket
- Vibra motor

