

# DMM/Thermometer with AC Clamp Feature

HHM59  
\$129



- ✓ **Measures**
  - Current to 1000 A AC
  - Voltage to 750 Vac, 1000 Vdc
  - Resistance to 2 MΩ
- ✓ **Direct Temperature Readout for Type K Thermocouple**
- ✓ **51 mm (2") Jaw Opening**
- ✓ **Peak Hold Feature Captures Current Surges**

The HHM59 is a lightweight completely portable digital clamp meter with a 3½ digit LCD display which is readable in all light conditions. The decimal point is automatically positioned, and the polarity indication is standard for negative readings. Overrange and low battery indications are also standard.

## Specifications

### General

**Display:** 3½ digit liquid crystal; 1999 maximum reading

**Overrange Indication:** Blanking of all digits except the MSD, decimal point and polarity sign (if negative)

**Low Battery:** "LO BAT" displayed

**Measurement Rate:** 3 measurements per second, nominal

**Operating Temperature:** 0 to 50°C, 0 to 70% RH

**Storage Temperature:** -20 to 60°C, 0 to 80% RH with battery removed

**Power:** 9 V battery (included)

**Battery Life:** 100 hours typical

**Weight:** 0.31 kg (11 oz) including battery

**Dimensions:** 229 x 69 x 38 mm (9 x 2.7 x 1.5")

### DC Voltages

**Range:** 200 mV, 20 V, 1000 V

**Accuracy:** 0.5% of rdg + 1 digit

**Input Impedance:** 10 MΩ

**Overload Protection:** 500 Vdc, 350 Vac (15 sec, 2 V range); 1200 Vdc, 850 Vac (all other ranges)


**Resolution:** 100 mV (200 mV range), 10 mV (20 V range), 1 V (1000 V range)

### Resistance

**Ranges:** 200 Ω, 20 KΩ, 2 MΩ

**Accuracy:** 200 Ω, 1% of rdg + 3 digits;

2 KΩ through 2 MΩ, 0.8% of rdg + 1 digit

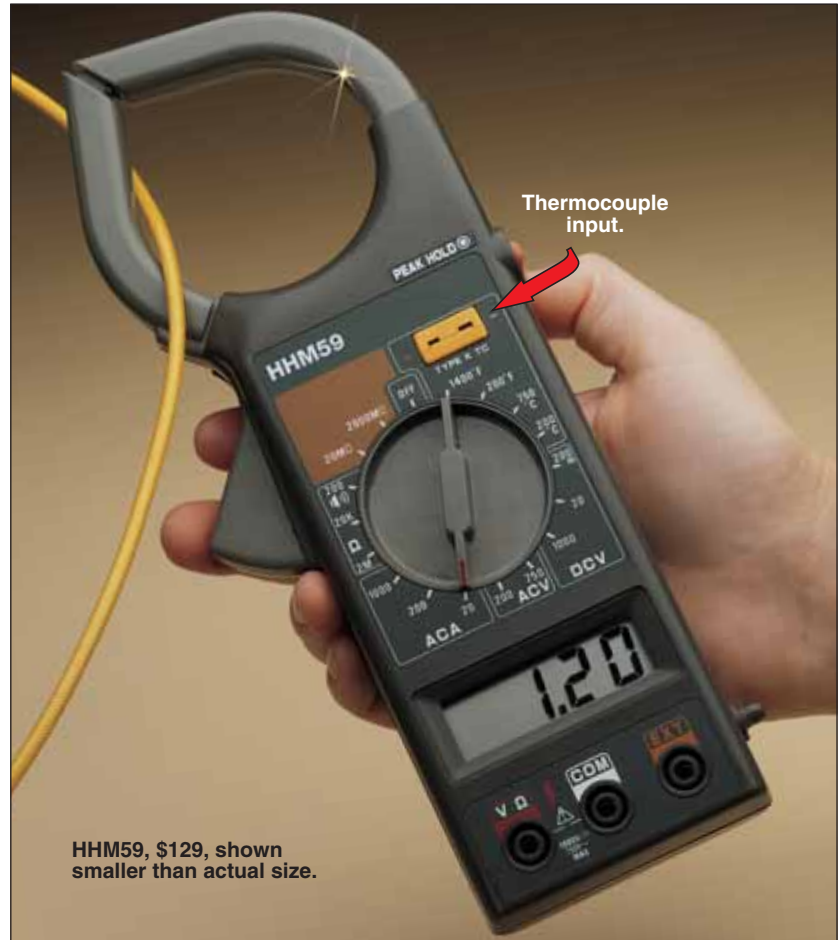

HHM59, \$129, shown smaller than actual size.

**Overload Protection:** 500 Vdc/Vac  
**Resolution:** 0.1 Ω (200 Ω range), 10 Ω (20 KΩ range), 1 KΩ (2 MΩ range)

### AC Voltages

**Ranges:** 200 V, 750 V

**Accuracy:** 1.2% of rdg + 10 digits; 50 Hz to 500 Hz

**Input Impedance:** 10 MΩ

**Overload Protection:** 1200 Vdc, 850 Vac

**Resolution:** 0.1 V (200 V range) 1 V (750 V range)

### Temperature

**Ranges:** -40 to 750°C, -40 to 1400°F

**Resolution:** 0.1°C/°F

**Accuracy:** 3% of reading + 1°C, 2°F

### AC Current

**Ranges:** 20 A, 200 A, 1000 A

**Accuracy (50 Hz to 500 Hz):**

20 A: 3% of rdg + 5 digits

200 A: 2% of rdg + 5 digits

200 A to 800 A: 2% of rdg + 5 digits

800 A to 1000 A: 3% of rdg + 5 digits

**Overload Protection:** 1200 A for 60 seconds

**Jaw Opening:** 5 cm (2")

**Resolution:** 10 mA (20 A range), 100 mA (200 A range), 1 A (1000 A range)

### Instant Continuity

**Response Time:** 100 msec



### Thermocouple Included!

The HHM59 includes a free 1 m (40") Type K insulated beaded wire thermocouple with subminiature connector and wire spool caddy.

**Order a Spare! Model No. SC-GG-K-30-36, \$15.**

**AVAILABLE FOR FAST DELIVERY!**

### To Order (Specify Model Number)

Model No.	Price	Description
HHM59	\$129	Digital clamp meter

Comes with wrist strap, 9 V battery, carrying case with strap, test leads, Type K beaded wire thermocouple and operator's manual.

**Ordering Example:** HHM59, digital clamp meter, \$129.



#### UNITED STATES

[www.omega.com](http://www.omega.com)  
1-800-TC-OMEGA  
Stamford, CT.

#### CANADA

[www.omega.ca](http://www.omega.ca)  
Laval(Quebec)  
1-800-TC-OMEGA

#### GERMANY

[www.omega.de](http://www.omega.de)  
Deckenpfronn, Germany  
0800-8266342

#### UNITED KINGDOM

[www.omega.co.uk](http://www.omega.co.uk)  
Manchester, England  
0800-488-488

#### FRANCE

[www.omega.fr](http://www.omega.fr)  
Guyancourt, France  
088-466-342

#### CZECH REPUBLIC

[www.omegaeng.cz](http://www.omegaeng.cz)  
Karviná, Czech Republic  
596-311-899

#### BENELUX

[www.omega.nl](http://www.omega.nl)  
Amstelveen, NL  
0800-099-33-44



## More than 100,000 Products Available!

### • Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

### • Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

### • pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

### • Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

### • Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

### • Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters