# AW-PS301

# Operating Instructions



# Panasonic®

Before attempting to connect or operate this product, please read these instructions completely.

# CAUTION

RISK OF ELECTRIC SHOCK DO NOT OPEN



### CAUTION:

TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER SERVICEABLE PARTS INSIDE.

REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

SA 1966

------ For U.S.A .--

Warning:

This equipment generates and uses radio frequency energy and if not installed and used properly, i.e., in strict accordance with the instruction manual, may cause harmful interference to radio communications. It has been tested and found to comply with the limits for a Class A computing device pursuant to Subpart J of Part 15 of FCC Rules, which are designed to provide reasonable protection against such interference when operated in a commercial environment.

This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

The serial number of this product may be found on the bottom of the unit.

You should note the serial number of this unit in the space provided and retain this book as a permanent record of your purchase to aid identification in the event of theft.

Model No.	
Serial No.	

WARNING:

TO PREVENT FIRE OR ELECTRIC SHOCK HAZARD, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

# **FEATURES**

This AC Adapter is for the Pan/tilt Control Panel and Hybrid Control Panel.
 Applicable Control Panels: AW-RP301, AW-RP305, AW-RP501, AW-RP505

# **PRECAUTIONS**

- Handle the control panel with care.
   Dropping the control panel or subjecting it to a strong shock can cause a failure or an accident.
- Operating temperature range 0°C to +38°C
   Avoid using it in a cold place below 0°C or a hot place above +38°C because low or high temperature will adversely affect the parts inside.
- Switch power off before power cable connection or disconnection.
   Be sure to switch power off before connecting or dis-

Be sure to switch power off before connecting or disconnecting the power cable.

· Avoid outdoor use.

 Install the control panel more than 1 meter away from the monitors.

### Care


Pull out the power cable plug, and wipe the control panel clean with a dry cloth. If it is extremely dirty, dip a cloth into a diluted solution of kitchen detergent, squeeze it hard, and wipe the product surfaces carefully.

### Note

- Do not use benzine, paint thinner, or other volatile liquids.
- When using a chemical duster, carefully read the caution notes on its use.

# CONNECTION

- 1) Plug the supplied AC cable into the AC Inlet.
- ② Insert the DC plug into the DC 12V IN Connector of the control panel.
- 3 Fasten the DC cord with the cord clamp on the control panel to prevent the DC plug from disconnecting.
- 4 Insert the AC cable plug into an AC outlet.
- (5) Pull out the AC cable from the outlet before switching power off.

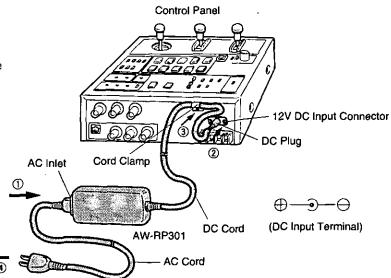

# **SPECIFICATIONS**

Source Voltage: 120 V AC 60 Hz

Input Capacity: 20W

Power Output: 12V DC, 1.2A

Operating temperature: 0°C to +38°C (32°F to 100°F)

Dimensions: 65(W) x 138(H) x 30(D) mm, DC cable: 2m, AC cable: 3m

2-9/16"(W) x5-7/16"(H) x 1-3/16"(D)

Weight: 260 g (0.57 lbs.) (except for AC cable)

Finish: Black resin forming

Weight and dimensions indicated are approximate. Specifications are subject to change without notice.

# **ACCESSORIES**

AC Cable ..... 1

,		
		•
	•	
	•	

	•				
		•			
•	•	•			
	•				
				-	
				•	
					,
				•	
	•				



## Broadcast & Television Systems Company

### Division of Matsushita Electric Corporation of America

Executive Office: One Panasonic Way 3F-5, Secaucus, NJ 07094

### Regional Offices:

EASTERN ZONE: 50 Meadowlands Parkway, Secaucus, NJ 07094 (201) 348-7620 CENTRAL ZONE: 1707 North Randall Road, Elgin, IL 60123 (847) 468-5200

SOUTHERN ZONE:

Atlanta Region: 1225 Northbrook Parkway, Suite 1-160, Suwanee, GA 30024

Panazip 11 (770) 338-6841, fax (770) 338-6741

Law Enforcement Video Products: 1225 Northbrook Parkway, Suite 1-160, Suwanee, GA

30024, Panazip 11 (770) 338-6844, fax (770) 338-6721

### WESTERN ZONE:

Seattle Region: 1200 Wastlake Ave., North, Suite 508, Seattle, WA 98109 (206) 285-8883 Los Angeles Region: 6550 Katella Ave. 17A-1, Cypress, CA 90630 (714) 373-727 Government Marketing Department: 52 West Gude Drive, Rockville, MD 20850 (301) 738-3840

### PANASONIC CANADA INC.

5770 Ambler Drive, Mississauga, Ontario, L4W 2T3 Canada (905) 624-5010

PANASONIC SALES COMPANY

DIVISION OF MATSUSHITA ELECTRIC OF PUERTO RICO, INC.

San Gabriel Industrial Park, 65th Infantry Ave. KM, 9.5 Carolina, Puerto Rico 00630 (809) 750-4300