


Panasonic

Color Laser Printer

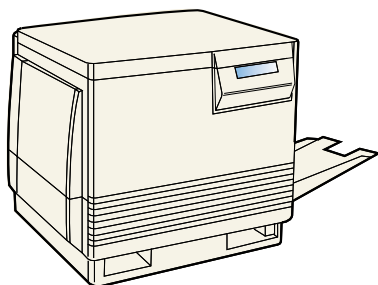

Operating Instructions

Model No. **KX-P8415**

The KX-P8415 Operating Instructions consist of the following 3 files.

- Print.pdf
- Mainte.pdf
- Spec.pdf

These files can be opened by clicking on their names below. The printer's features are described on the following pages of this file.




Settings and Printing (Print.pdf)

This section contains information on printer panel, printer driver and printing a document.



Care and Maintenance (Mainte.pdf)

This section contains information on cleaning the printer, replacing supplies, clearing jams, troubleshooting, error messages and repacking.



Specifications (Spec.pdf)

This section contains the specifications of the printer, media to be used, software and interface.

Please carefully read the Operating Instructions before operating. Keep KX-P8415 CD-ROM in the protective case.

Do not expose the CD-ROM to direct sunlight or extreme heat and do not scratch or smudge the surface of the CD-ROM.

The KX-P8415 Color Laser Printer provides fast, high-quality color printing on plain paper, plus the ease of operation and high performance you expect from a laser printer, including the following.

High quality

Resolution—maximum 1200 x 1200 dpi (with optional additional memory)

High speed

Continuous printing on Letter or A4 size paper

Full-color mode—Maximum 4 ppm (pages per minute)

Three color mode—Maximum 5.3 ppm

Monochrome mode—Maximum 16 ppm

Color management (see “Settings and Printing”)

Agfa CMM (Color Management Module) or ICM (Image Color Management) enables a closer matching between monitor and printed output. ICM is not supported under Windows NT® 4.0*1.

*1 Microsoft® Windows NT® Workstation operating system, and Microsoft® Windows NT® Server network operating system Version 4.0 (hereafter Windows NT 4.0)

Paper handling

■ Media tray:

Standard tray (A4 or Letter): 200 sheets using 75 g/m² (20 lbs.) paper

Transparency or legal paper can be used when loaded in an optional tray.

■ Multi-purpose tray:

The following media can be used in the multi-purpose tray.

- Laser paper
- Transparency
- Labels
- Envelope
- Card stock
- Coated paper

■ 2nd cassette feeder (option):

The 2nd cassette feeder has two tray slots, each of which can hold up to 200 sheets of 75 g/m² (20 lbs.) paper.

(Continued)

Overlay printing (see “Settings and Printing”)

Allows you to print a documents overlaid with a graphic image.

Automatic duplex printing (option) (see “Settings and Printing”)

Automatic duplex printing is possible when the optional auto duplex printing unit is installed.

Networking (option)

- Supports TCP/IP and IPX (Novell) protocols simultaneously when the optional Network card for Ethernet is installed
- Supports 10 Base-T and 100 Base-T
- Supports LPR printing

Network control tool (Option)

With the optional Network card for Ethernet Card installed, using the network control tool enables the following functions.

- Displaying the printer information (type of the tray and media used, remaining life of the consumables, etc.)
- Displaying the printer status
- Configuring the network
- Notifying the printer error by mail

- Windows NT is an either registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.
- Agfa is a registered trademark of Agfa-Gevaert, AG.
- IPX is a registered service mark of Novell, Inc., in the United States and other countries.
- Novell and NetWare are registered trademarks of Novell, Inc., in the United States and other countries.
- Destiny™, WinStyler™ Display List Color and WinRefs™ are trademarks of Destiny Technology Corporation.

The operating instructions are subject to change without notice.

WinStyler™ DLC - Copyright 1995-1999, Destiny Technology Corp. Ver. 1.0 All Rights Reserved.

WinRefs™ Copyright 1994-1999, Destiny Technology Corp. Ver. 2.0 All Rights Reserved.

© Kyushu Matsushita Electric Co., Ltd. 1999