


# Operating Instructions

Camera Housing  
WV-40

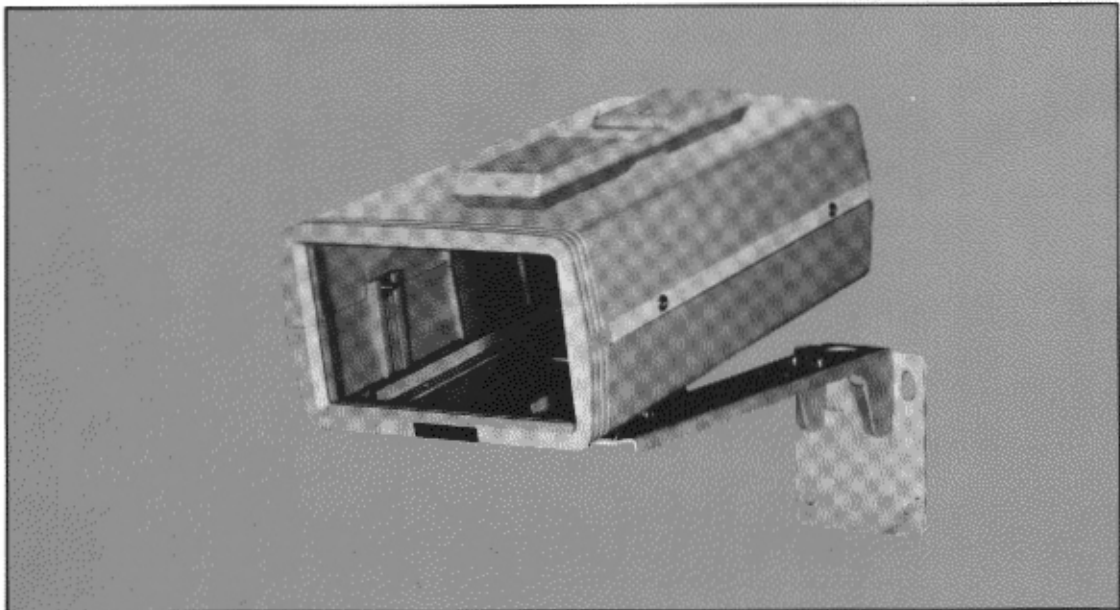

**Panasonic**<sup>®</sup>


Before attempting to connect or operate this product, please read these instructions completely.

## PRECAUTIONS


1. This camera housing is designed for solid state color camera WV-CD110 only.
2. Optional lenses of WV-LA6 and WV-LA12 can be used as automatic iris lens.
3. Select a flat location which can support the entire weight of camera, lens, bracket and etc.
4. Clean the front glass with a dry cloth. If it is difficult to remove dust, soak the cloth with a mild detergent solution and wipe gently.

## INSTALLATION


1. Remove two screws on the bottom plate of the housing and remove bottom plate.

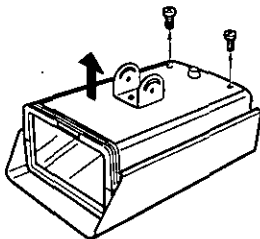


2. Attach the bottom plate to the housing mounting bracket using with supplied four screws and washers.




3. Temporary attach the housing mounting bracket to the wall using with upper two screw holes.
4. Connect the coaxial cable to the video output terminal of the solid state color camera.

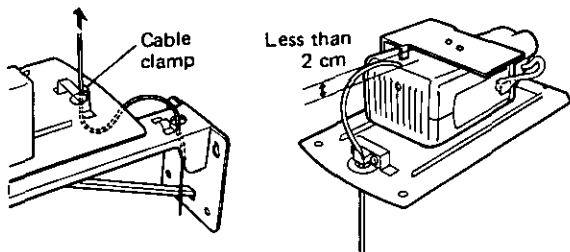


5. Attach the solid state color camera to the mounting angle on the bottom plate using with supplied bolt and washer.




6. Clamp the coaxial cable to the housing mounting bracket.



7. Attach the housing mounting bracket to the wall using with four screws.

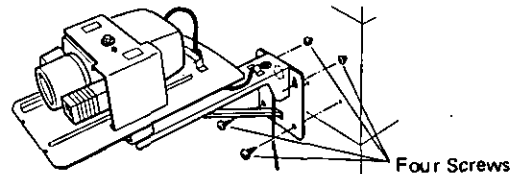


8. Adjust the panning angle and tilting angle for appropriate position by loosening adjusting screws.

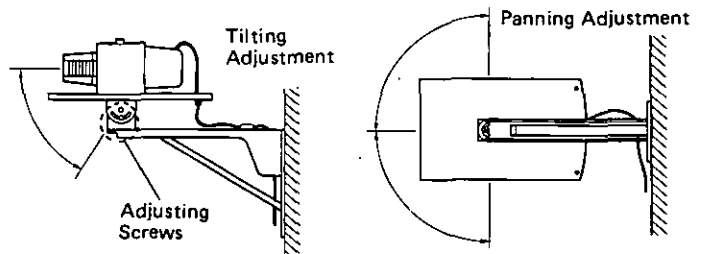

9. Connect the coaxial cable to the video monitor.  
Caution : Keep the Power Switch of the monitor in the OFF position during connection. If the power of the unit is ON during connection for the camera, the camera will not function due to the protection circuit for the connection of wrong camera.

10. Attach the top cover onto the bottom plate using two screws.

# OUTLINE of HOUSING MOUNTING BRACKET

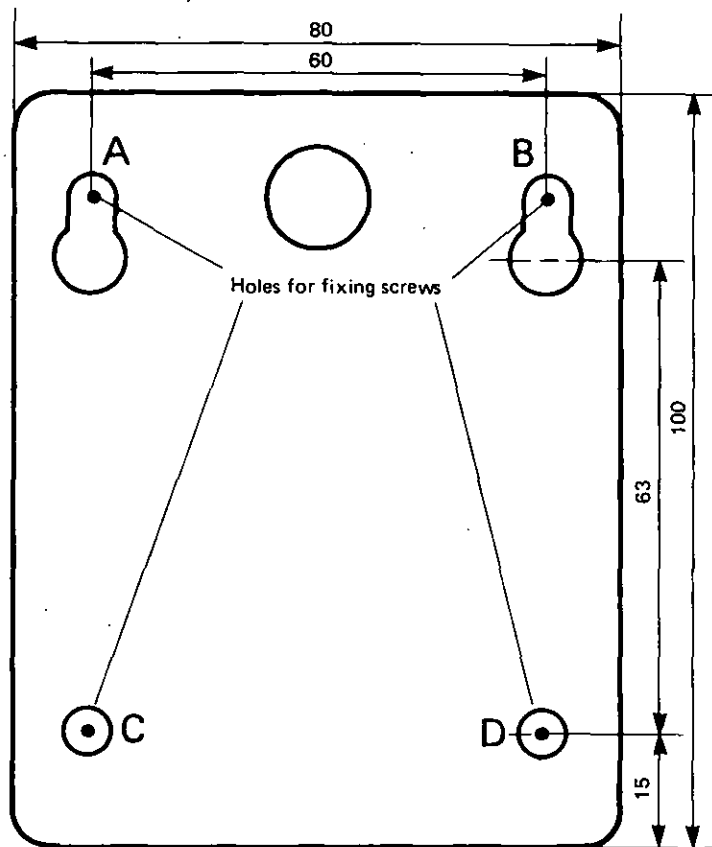

## SPECIFICATIONS

Applicable Camera :	WV-CD110 with WV-LA6 or WV-LA12
Adjustable Angle :	Panning : 180°
	Tilting (Up) : 60° (rotate panning at 90°)
	5° (rotate panning at 0°)
	Tilting (Down) : 60°
Ambient Temperature :	14°F - 104°F (-10°C - +40°C)
Dimensions :	5-15/16'' (W) x 9-1/8'' (H) x 13-5/16'' (D)
	151 (W) x 231 (H) x 339 (D) mm
Weight :	2.6 lbs (1.2kg)

## STANDARD ACCESSORIES

Camera Fixing Bolt with Washer .....	1
Housing Mounting Bracket Fixing Screws with Washer .....	4

**PANASONIC INDUSTRIAL COMPANY, Division of Matsushita Electric Corporation of America**

Executive Office: One Panasonic Way, Secaucus, New Jersey 07094 (201) 348-7000

Audio-Video Systems Division Executive Office: One Panasonic Way, Secaucus, New Jersey 07094 (201) 348-7000

Northeast Regional Office: Panasonic Audio-Video Systems, 333 Meadowlands Parkway, Secaucus, New Jersey 07094 (201) 348-7620

Northwest Regional Office: Panasonic Audio-Video Systems, 4060 Lind Avenue, Renton, Washington 98055 (206) 251-5209

Midwest Regional Office: Panasonic Audio-Video Systems, 425 East Algonquin Road, Arlington Heights, Illinois 60005 (312) 981-4826

Southeast Regional Office: Panasonic Audio-Video Systems, 3 Meca Way, Norcross, Georgia 30093 (404) 923-3663

Southwest Regional Office: Panasonic Audio-Video Systems, 1825 Walnut Hill Lane Irving, Texas 75062 (214) 258-2828

Western Regional Office: Panasonic Audio-Video Systems, 6550 Katella Avenue, Cypress, California 90630 (714) 895-7200

**PANASONIC HAWAII INC.**

91-238 Kauhī Street Ewa Beach P.O. Box 774 Honolulu, Hawaii 96808-0774 (808) 682-2851

**MATSUSHITA ELECTRIC OF CANADA LIMITED**

5770 Ambler Drive, Mississauga, Ontario, Canada L4W 2T3 (416) 624-5010

**PANASONIC SALES COMPANY**

Ave 65 de Infanteria, Km. 9.7, Victoria Industrial Park, Carolina, Puerto Rico 00630 (809) 769-4320