


PHILIPS-SERVICE

925 X


13.8—51 m
175—585 m
708—2000 m

9640—55, Z=7Ω
110 V, 125 V, 145 V
200 V, 225 V, 245 V
74 Watt



708—2000 m A		175—585 m B		708—2000 m B	
$\text{C}_6, \text{C}_7, \text{C}_8 \text{ min.}$ 128 kc/s—33000 pF—g1B2 C 62, 61, 52, 51 max.	$\text{C}_6, \text{C}_7, \text{C}_8 + 15^\circ$ 1600 kc/s—Y C38, C28, C18 max. .25 pF—nB2 546 kc/s—Y C6, C7, C8 (C) 546 kc/s	$\text{C}_6, \text{C}_7, \text{C}_8 + 15^\circ$ 1600 kc/s—Y C30, C28, C18 max.	$\text{C}_6, \text{C}_7, \text{C}_8 + 15^\circ$ 1600 kc/s—Y C30, C28, C18 max.	.25 pF—nB2 160 kc/s—Y C6, C7, C8 (C) 160 kc/s C50 max.	
708—2000m C					
$\text{C}_6, \text{C}_7, \text{C}_8 \text{ min.}$ 128Lr/s—Y C91 min.					
175—585m D					
1154 kc/s—Y C6, C7, C8 (C) 1154 kc/s 260m					

15° = 09 992 44.6

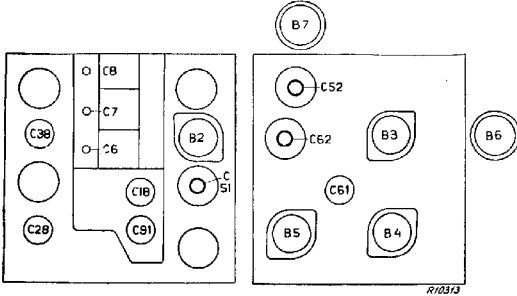



C1	45 pF	49 025 22.0	R1	120 Ω	49 363 16.0
C2	45 pF	49 025 22.0	R11	0.5 MΩ	49 472 26.0
C6	11-490 pF		R21	0.65 MΩ	49 479 36.0
C7	11-490 pF	49 000 65.0	R22	0.2 MΩ	49 479 45.0
C8	11-490 pF	49 000 65.0	R23	3000 Ω	49 375 48.0
C14	5.3 pF	40 055 10.0	R31	0.1 MΩ	49 377 48.0
C18	20 pF	49 005 05.2	R32	0.1 MΩ	49 377 47.0
C28	20 pF	49 005 05.2	R33	3900 Ω	49 377 43.0
C38	20 pF	49 005 05.2	R34	33 Ω	49 375 06.0
C40	39 pF	49 057 16.0	R35	1.2 MΩ	49 376 61.0
C47	1360 pF	49 057 44.0	R36	0.12 MΩ	49 377 49.0
C48	200 pF	28 212 08.1	R37	1 MΩ	49 376 60.0
C49	390 pF	49 055 35.0	R38	0.68 MΩ	49 375 38.0
C50	200 pF	28 212 08.1	R41	56000 Ω	49 375 45.0
C51	70-100 pF		R42	0.22 MΩ	49 375 52.0
C52	70-100 pF		R50	15000 Ω	49 375 38.0
C61	70-100 pF	49 005 01.1	R51	0.12 MΩ	49 375 49.0
C62	70-100 pF	49 127 61.0	R52	2700 Ω	49 375 29.0
C72	47000 pF		R53	0.68 MΩ	49 375 58.0
C73	100 pF	28 185 68.1	R55	0.27 MΩ	49 375 53.0
C81	18 pF	49 055 19.0	R56	0.82 MΩ	49 375 59.0
C82	120 pF	49 055 29.0	R57	1.5 MΩ	49 375 62.0
C83	10800 pF	49 005 06.0	R58	56000 Ω	49 375 45.0
C91	70-100 pF	49 127 15.0	R59	12000 Ω	49 375 37.0
C92	12000 pF	49 127 21.0	R60	0.1 MΩ	49 375 48.0
C93	39000 pF	49 127 21.0	R61	470 Ω	49 376 20.0
C100	33 pF	49 057 05.0	R62	560 Ω	49 376 21.0
C101	10 pF	49 055 16.0	R63	0.68 MΩ	49 375 58.0
C102	47000 pF	49 127 61.0	R64	2 × 4.7 MΩ	
C103	68 pF	49 055 26.0		9.4 MΩ	49 377 68.0
C104	470 pF	49 055 36.0	R65	0.39 MΩ	49 375 55.0
C105	47000 pF	49 128 61.0	R66	0.82 MΩ	49 375 59.0
C106	6.8 pF	49 055 14.0	R72	150 Ω	49 375 14.0
C107	6000 pF	49 127 56.0	R73	180 Ω	49 375 15.0
C108	0.1 pF	49 127 65.0	R81	47000 Ω	49 375 44.0
C112	5600 pF	49 127 11.0	R82	0.12 MΩ	49 375 49.0
C114	150 pF	49 055 30.0	R83	68000 Ω	49 375 46.0
C116	10800 pF	49 127 17.0	R84	0.12 MΩ	49 375 49.0
C117	0.39 pF	49 127 33.0	R85	0.22 MΩ	49 375 52.0
C118	0.1 pF	49 127 63.0	R86	27000 Ω	49 375 41.0
C119	2200 pF	49 126 51.0	R91	1 MΩ	49 376 60.0
C120	2390 pF	49 126 51.0	R92	1 MΩ	49 376 60.0
C121	12900 pF	49 128 15.0	R93	56000 Ω	49 377 45.0
C122	47000 pF	49 127 61.0	R94	1.5 MΩ	49 376 62.0
C123	6.8 pF	49 055 14.0			
C125	0.1 pF	49 127 63.0			
C126	82000 pF	49 127 25.0			
C131	22900 pF	49 129 90.0			

	B2	B3	B4	B5	B6	B7
	ECH 21	ECH 21	EBL 21	EBL 21	AZ 1	EM 4
Va	aT 125 aH 275	aT 50 aH 275	250	260		30
Vg2 (+4)	80	100	275	275		275
Vk	185	1,6	0	0		0
Ia	aT 2,6 aH 2,7	aT 1,5 aH 5	20,5	22		0,25 0,25
Ig2 (+4)	6,5	2,9	2,7	3		1









S1, S2, S3, S4 S11, S14, S28, S30 S17, S18, S19, S20 S33, S34 S37, S38, S39, S40 S51, S51 S53, S54, S55, S56, S52 S61, S62, S63, S62 S71 S81, S82, S83, S84, S85, S86 S91 S92, S93,	A1 056 98.0 A1 037 29.0 A1 037 28.0 A1 037 67.0 A1 037 68.0 A1 037 31.2 A1 038 34.2 A1 037 44.2 A1 108 21.0 A1 082 10.0 28 587 88.0 28 587 71.0	925 X-03 A R72 A2 075 53.0 49 375 16.0
--	--	--

925 X

925 X-03

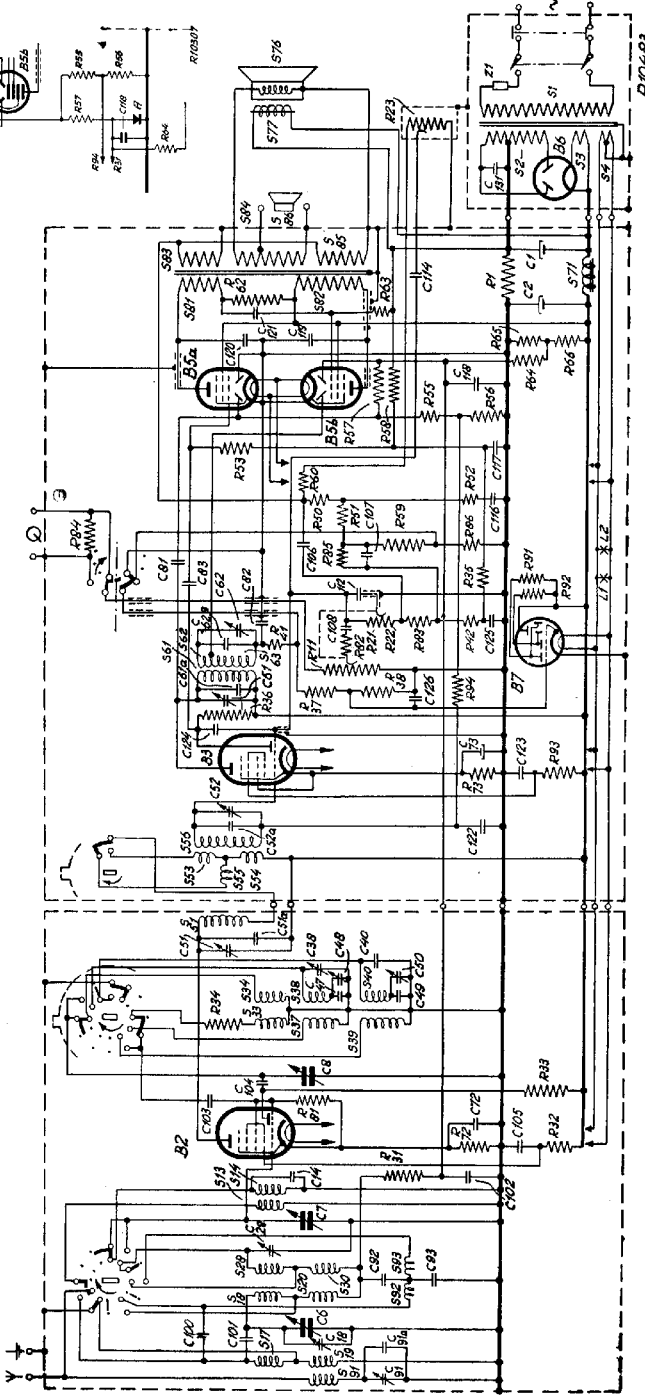

R104-B3



R102B4

**PHILIPS EROICA,
ORAVA 925 X**
MF 128 kHz




1004142

2-EBL1

EM4

ECH4

ECH4

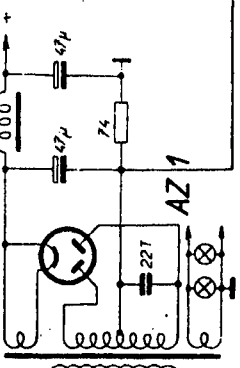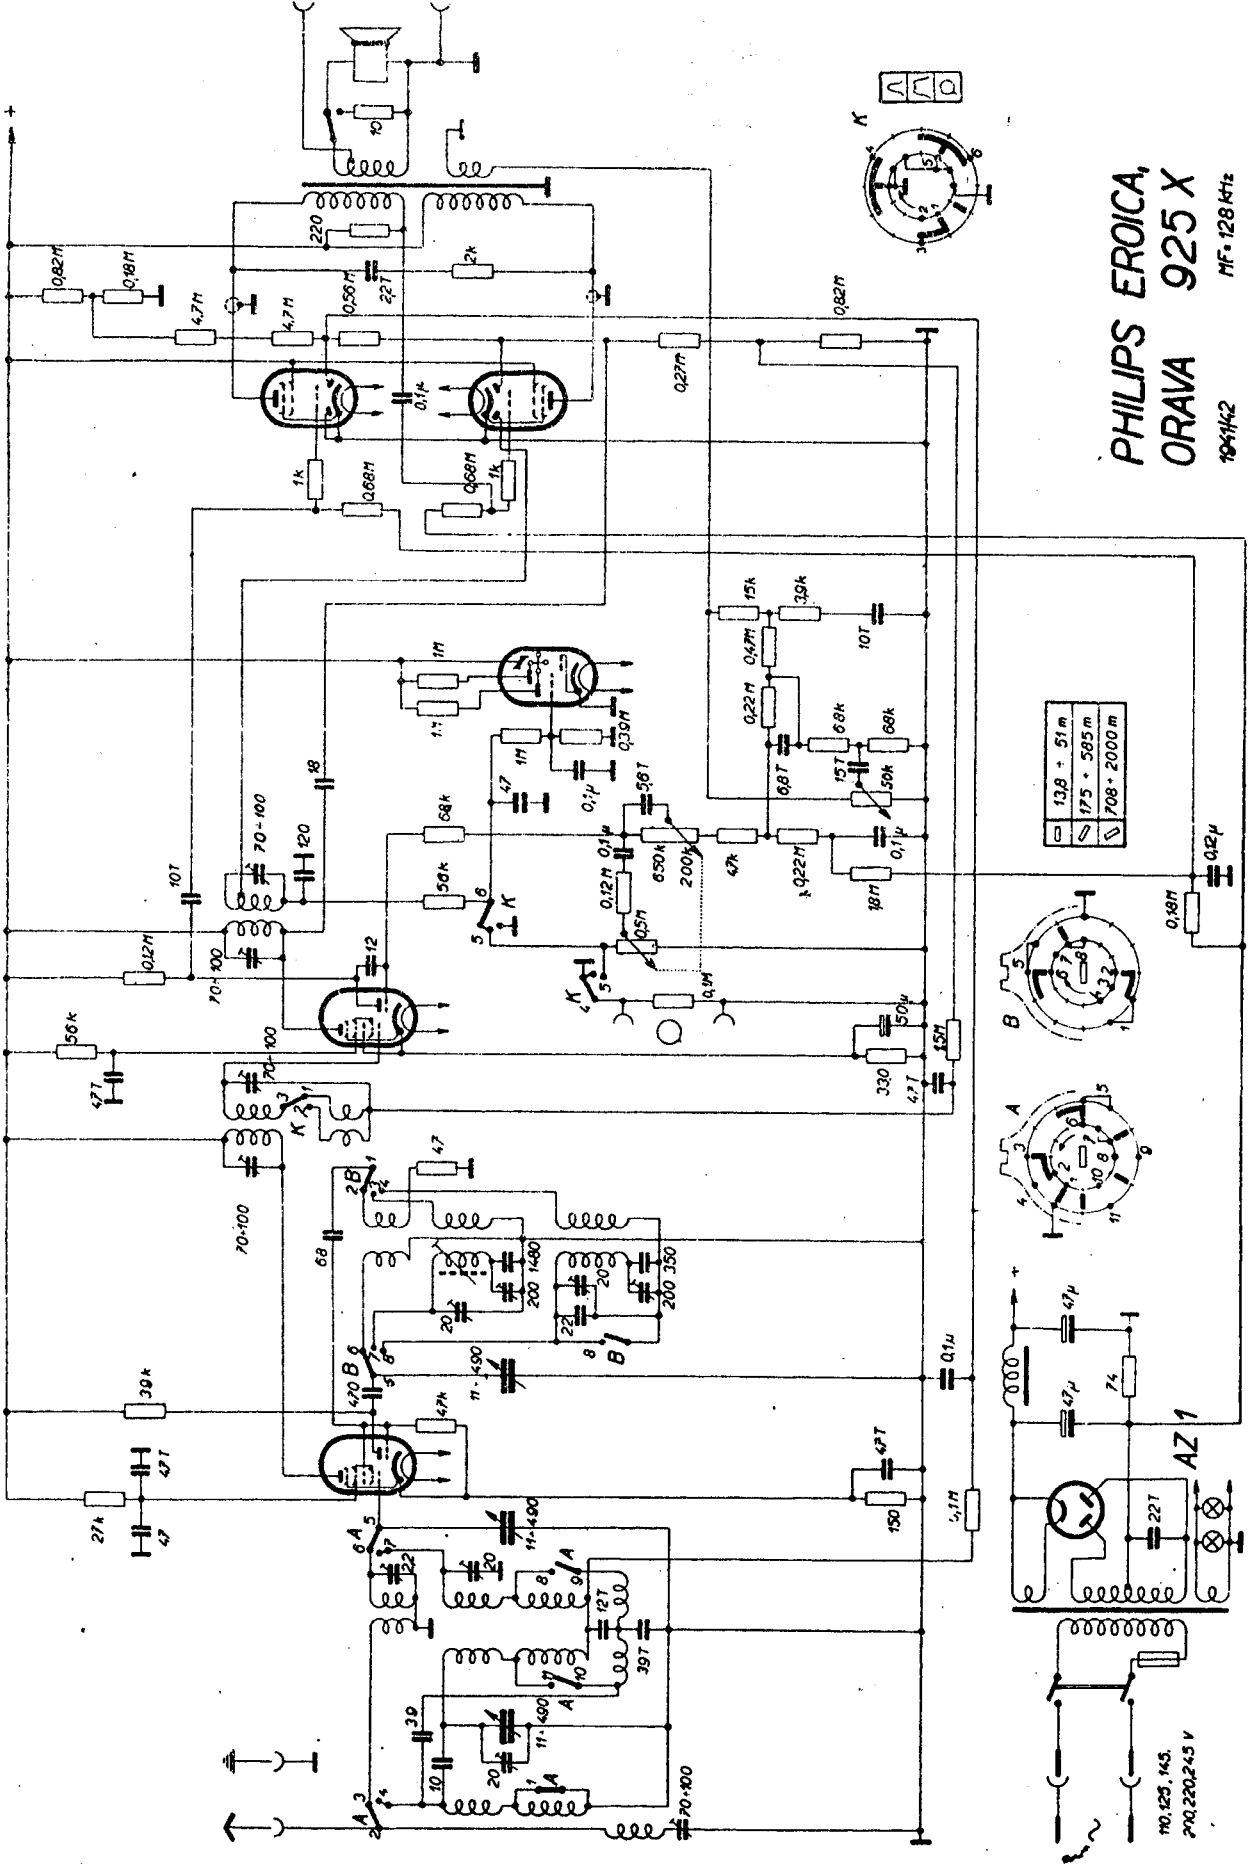

110, 220, 245 V
250, 220, 245 V