


Piezo Crystal Company Mini Wonder OCXO

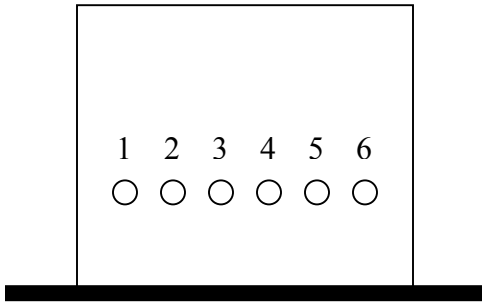

Pin Assignments

- 1 – 10MHz TTL
- 2 – Ground
- 3 – +12V
- 4 – Oven Mon
- 5 – EFC In
- 6 – Ground

Model # 2920136
Mfr # 101728-001 Rev 2
Ser #'s 925 (9330), 1084 (9335), 1232 (9335)
Power Requirements: +12V @ 250ma cold, 125ma warm
Output: 10.000MHz TTL Square Wave
Adjustment: Internal 10-turn Freq adjust pot
External 0-5v EFC Input (+/- 1.5PPM)
Internally biased to +2.5v
EFC Sensitivity: 5.35e-7 (925), 6.85e-7 / volt
Oven Monitor: TTL Logic 1 = Warm-Up, 0 = Stable

Mini Wonder EFC vs Frequency

