



RFS10F: 10 MHz Rubidium Frequency Standard



Key Features

- Rubidium Oscillator as main frequency reference
- Five sinewave outputs as standard.
- Five additional outputs available as option 01
- Very Low Phase Noise, see specifications below
- Additional five outputs at different frequency
- Many options available. See list in this brochure
- Custom built options available upon request
- 19" 2U high rack mountable case

Description


The RFS10F is a 10 MHz rubidium frequency standard with many options as described below. An optional input allows the RFS10F to be locked to a 1 pps signal such as GPS. Also the 1 pps output derived from the rubidium will align itself in time to the 1 pps input to within 150 ns.

Options


Various options are available such as:

- Very low phase noise outputs at 10.23 MHz, 13 MHz or 20 MHz. Other frequencies on request. All outputs locked to main rubidium reference.
- Squarewave Outputs
- 100 MHz squarewave generator. Three outputs are provided, sinewave, TTL and PECL.
- Output levels to +19 dBm.
- Redundancy. Two units operate together for high reliability systems.
- External DC input. +12V or +24V external DC backup.
- Extra sinewave outputs.

Typical phase noise of 10.00 MHz Output

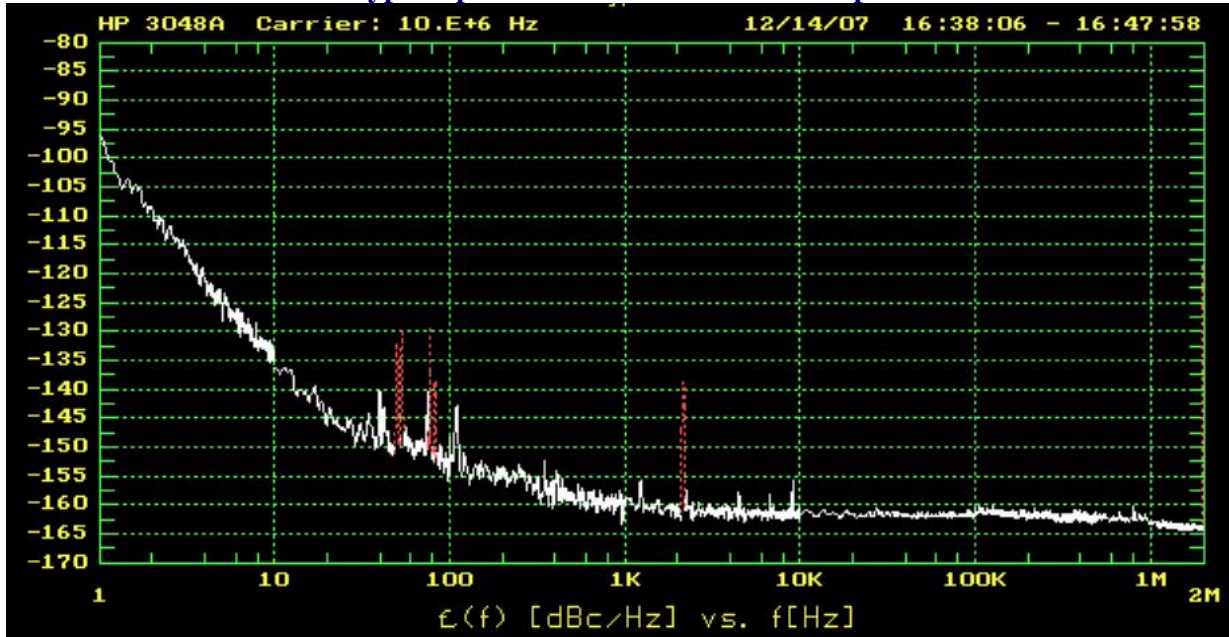

Typical phase noise of 10.23 MHz Option

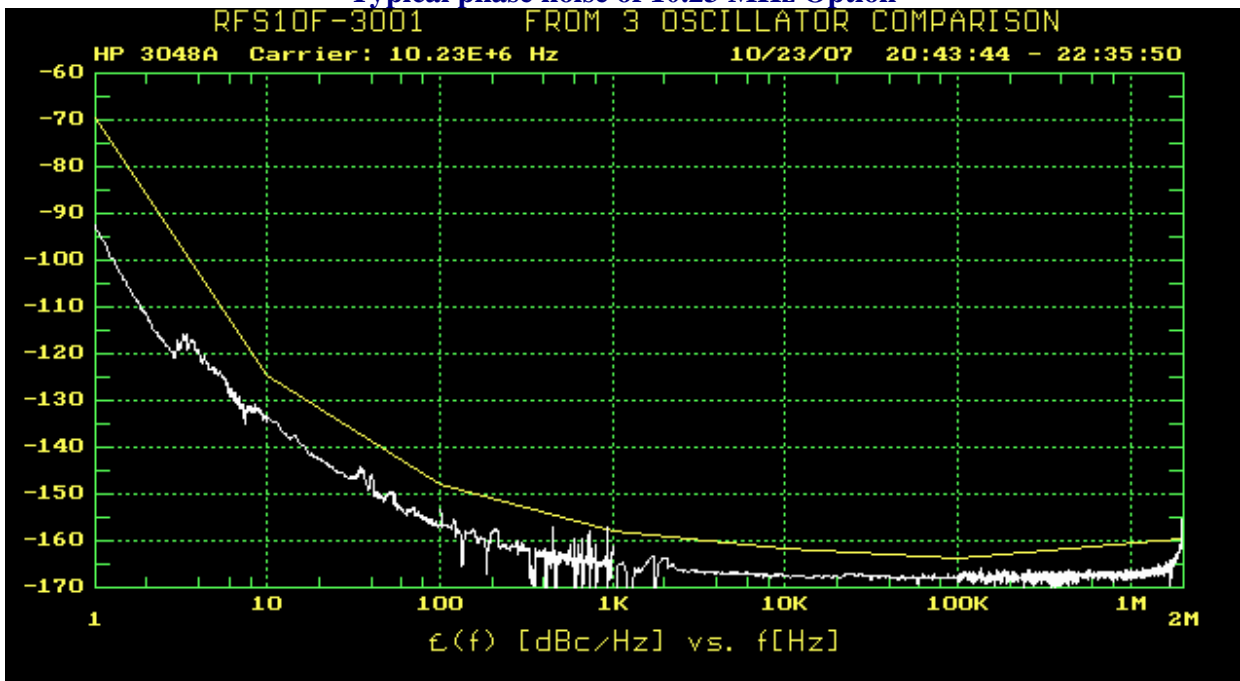

Specifications for the RFS10F are shown on the next page.

Specifications

| Description | Specification | Remarks |
|--|---|--|
| Rubidium Oscillator | | |
| Output Frequency | 10 MHz sinewave | Optional change to 5 MHz |
| Aging (after 30 days) | $< 5 \times 10^{-11}$ /month or $< 5 \times 10^{-10}$ /year | |
| Accuracy at shipment | $< \pm 5 \times 10^{-11}$ | |
| Allan Variance | $< 1 \times 10^{-11}$ (1s), $< 2 \times 10^{-12}$ (100s) | |
| Spurious | < -120 dBc (100 kHz BW) | |
| Frequency Retrace | $\pm 5 \times 10^{-11}$ (72 hours on, 72 hours off) | |
| Stability | $< 5 \times 10^{-12}$ | |
| Trim Range | $\pm 2 \times 10^{-9}$ (bottom panel), ± 1 ppm (via RS232) | |
| Warm-Up Time | < 6 minutes to within 1×10^{-9} | |
| Temperature Coefficient | 5×10^{-11} (-10 °C to +50 °C) | |
| Magnetic Field | $< 2 \times 10^{-10}$ for 1 Gauss field reversal | |
| Design Life | 10 to 20 years | |
| 10 MHz Outputs | | |
| Number of Outputs | Five as standard, ten with option 01 | Rear panel BNC connectors. |
| Frequency | 10 MHz | |
| Accuracy | Same as main Rubidium Reference | |
| Signal Type | Sine wave | |
| Amplitude | 0 dBm to + 12 dBm adjustable | Internally adjustable |
| Harmonic Distortion | - 25 dBc (-45 dBc with option 07) | |
| Return Loss | > 20 dB @ 10 MHz | |
| Phase Noise (dBc/Hz) @ offset frequency @ 10 MHz carrier frequency. | -125 @ 10Hz, -145 @ 100 Hz, -156 @ 1 kHz, -157 @ 10 kHz, -158 @ 100 kHz | See graph for typical phase noise plot |
| 10.23 MHz Output (Option 05) or 13 MHz output (Option 05B) or 20 MHz (Option 05C) | | |
| Connector | BNC socket on rear panel | |
| Number of Outputs | Five as standard | |
| Frequency | 10.230 MHz, 13 MHz or 20 MHz | |
| Accuracy | Same as main Rubidium Reference | |
| Signal Type | Sine wave | |
| Amplitude | 0 dBm to + 12 dBm | Internally adjustable |
| Harmonic Distortion | - 25 dBc (-45 dBc with option 07) | |
| Return Loss | > 20 dB @ 10 MHz | |
| Phase Noise (dBc/Hz) @ offset frequency @ 10.23 MHz carrier frequency | -125 @ 10Hz, -149 @ 100 Hz, -161 @ 1 kHz, -165 @ 10 kHz, -165 @ 100 kHz | See graph for typical phase noise plot |
| 1 pps Output | | |
| Connector | D sub connector – rear panel | |
| Frequency | 1 pulse per second | |
| Signal Type | Pulse Output | Pulses high for 10 μ s when rubidium is locked. +5V DC when rubidium not locked. |
| Amplitude (open circuit) | 0 to 5 V, TTL Compatible | |
| Optional 1 pps Input | | |
| Connector | BNC socket on rear panel | Other external input frequencies available, e.g 5 MHz, 10 MHz, 100 MHz. |
| Input type | 1 pulse per second, TTL level. | |
| Miscellaneous | | |
| Operating / Storage Temperature | -10 °C to +40 °C / -20 °C to +60°C | |
| AC Power Inlet with switch | IEC320 power cord | |
| AC Voltage Range | 100 - 240 VAC | Rear Panel |
| Power consumption | 140 W Max (warm up), 70 W (operating) | Usable 90 - 260 VAC |
| Width x Depth x height. / Weight | 482.6 x 330 x 88 mm / 7 kg's | Warm up period is < 10 minutes at +20 °C |
| Consult Precision Test Systems for further details of these options. Not all options can be fitted at the same time. | | |

Precision Test Systems

| Head Office (UK) | South Africa | USA | Represented locally by: |
|---|--|---|-------------------------|
| Precision Test Systems LTD 40 Holkham Avenue, South Woodham Ferrers Essex, CM3 7AU, England Tel: +44 (0) 845 052 0920 Fax: +44 (0) 1245 330030 Email: uksales@ptsyst.com Web: www.ptsyst.com | Precision Test Systems cc P.O Box 1344 Witkoppen 2068 South Africa Tel: +27 (0) 11 464 3778 Email: sasales@ptsyst.com Web: www.ptsyst.com | Precision Test Systems Suite # 981 14781 Memorial Dr. Houston, TX 77079 Tel: 1 888 876 4804 Fax: 1 760 923 6354 Email: usasales@ptsyst.com Web: www.ptsyst.com | |

Specifications subject to change without notice (141207)