



# Q-MAC Electronics

## MX9011 HF-90M MONOBLOCK MANPACK



### TACTICAL COMMUNICATIONS

Tactical HF Radio

HF-90M

MIL-STD 810F

FREQUENCY HOPPING



### Secure, Simple to Use, Versatile

The MX9011 HF-90M Monoblock Manpack is a military grade communication device specifically designed for tactical applications. The MX9011 is purpose rated to withstand complete immersion, vibration, drop and temperature tests to Mil-Std 801F.

The HF-90M transceiver is an extremely compact and light weight unit, featuring only essential controls to ensure ease of operation. The HF-90M is available with a secure, jam-resistant ECCM Frequency Hopping option which can be field upgraded after the initial deployment.

Military users will appreciate the solid construction and ease of use of Q-MAC transceivers. The mechanical design of the HF-90M provides the fastest field service time of any transceiver with only 4 fasteners providing access to all modules. Emphasis in the design of the HF-90 has been placed on value-engineering to ensure low cost of ownership over a long service life.

### Designed for Tactical Use

The HF-90M is efficient to use in tactical situations with only essential controls on the front panel. Advanced programming functionality is available in sub-menu or via a PC programming package.

The unit can operate at selected power levels up to 50 Watt, whilst achieving the lowest battery consumption compared to other military transceivers. The HF-90M is extremely reliable due to the advanced SMD manufacturing process used and overall mechanical design efficiency.

The HF-90M incorporates superior signal handling capability which ensures excellent reception even in the most crowded radio environments.

The mechanical design of the HF-90M provides the fastest field service time of any transceiver with only 4 fasteners providing access to all modules. Emphasis in the design of the HF-90 has been placed on value-engineering to ensure low cost of ownership over a long service life.

### ECCM Frequency Hopping

The HF-90M is available with a secure, jam-resistant ECCM Frequency Hopping option. The development of the HF-90M Frequency Hopping Option represents a significant breakthrough in the field of military HF communications. For the first time, end users have access to a product which is affordable, yet offers a very high grade of voice security.

In short, this revolutionary new transceiver incorporates the very latest in RF design technology, making the HF-90M the most compact, versatile, high performance HF SSB transceiver available in the military market today suitable for Manpack, Vehicle and Base Station applications.

#### MX9011 Package Contents

- HF-90M Military Transceiver
- TA-99 Military Automatic Antenna Tuner
- Military Telephone Handset
- 6 Section Whip Antenna
- Long Wire Antenna
- Tape Whip Antenna
- Framed Backpack with Accessory Pockets
- 7.2 AH SLA Battery
- User Manual

#### MX9011 Optional Accessories

- Frequency Hopping Option
- AC Mains Charger
- DC Charger
- DTMF Handset Option
- Solar Panel Charger
- Hand Crank Generator
- End Fed Portable Broadband Antenna
- Lithium Ion Battery (8.8Ah and 17.6Ah)

### Features

- Frequency Hopping
- Anti-Jam Algorithm
- Rapid Synchronisation
- Secure Code Entry
- Smart Hopping
- Selcall
- Light Weight
- 50Watt PEP
- Auto Tuning
- 255 Channels






Q-MAC Electronics

# MX9011 HF-90M ECCM MIL-STD TRANSCEIVER

## Specifications

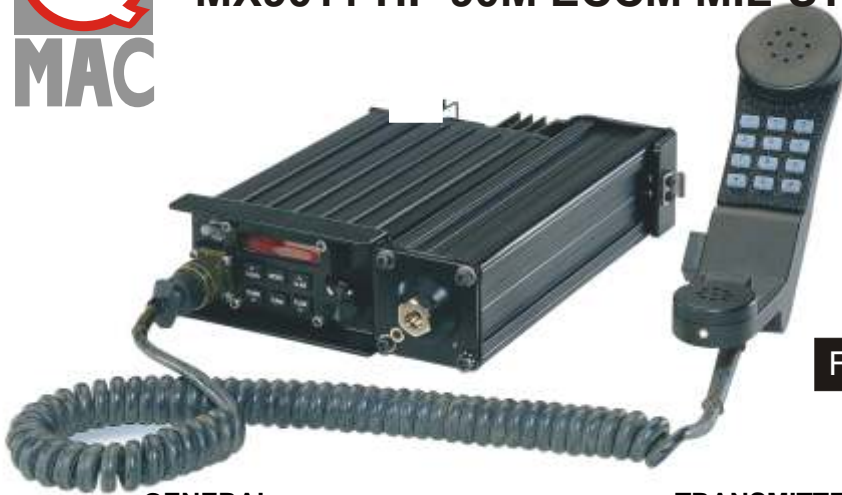

HF-90M

MIL-STD 810F

FREQUENCY HOPPING

### GENERAL

Frequency range	2 - 30 MHz
Modes of operation	USB, LSB (J3E), CW (Optional), Hopping(Optional), AM (Rx Only),FSK
Number of channels	255
Channel resolution	100Hz
Supply voltage	12 - 24V DC Nominal
Power consumption	
- Transmit	2A - 10A (subject to pre-set power output)
- Receive	310mA
Frequency stability	± 2ppm (± 1ppm 0°C-40°C)
Antenna impedance	50
Antenna connector	BNC
Handsets	Speaker microphone DTMF microphone & telephone handset
Selcall system	Based on CCIR 493-4 (Australian Standard)
Programming	Via front panel & DTMF mic/handset or IBM PC 4800,8,1,N
BITE	Micro, Rx, Tx Tests
MTTR	4 Minutes
MTBF	6000 Hours

### PHYSICAL CHARACTERISTICS

Dimensions (mm)	112(W) X 47(H) X 220(D)
Weight	1kg (HF-90 Only)
Construction	All metal extruded sleeve with front panel and heatsink
Finish	Black anodised Aluminium

### TA-99 AUTO TUNER SPECIFICATIONS

Frequency range	3-15 MHz
VSWR	Typically less than 2
Tuning time	2 Seconds max
Antenna type	Short Whip, Long Whip, Wire
Dimensions	205(W) x 50(H) x 50(D)mm
Weight	0.6 Kg
Supply current (idle)	30mA

### TRANSMITTER

Power output	50Watt PEP 2-12Mhz (derated above)
Unwanted sideband	Better than -45dB
Carrier suppression	Better than -50dB
Harmonic suppression	Better than -40dB
Audio Response	270Hz - 2800Hz

### RECEIVER

Sensitivity	0.25µV For10dB S+N/N
Selectivity	2.3kHz @ -6dB 4.8kHz @ -60dB
Image rejection	Better than -50dB
Intermodulation	Better than -70dB
3rd order intercept	+18dBm(GaAsFETMixer)
Intermediate freq's	83.16MHz,455kHz
AGC	Less than 3dB from 3uV - 1V
Audio response	270Hz 2800Hz
Audio output	2 Watt
Audio load impedance	8 Ohms

### FREQUENCY HOPPING (OPTIONAL)

Mode	SSB (J3E) speech plus FSK sync
Hop rate	5 hops per sec
Hop channels per band	256
Number of Hop bands	103 contiguous bands (2-30MHz)
Hop sequence	Pseudo-random
Late entry sync time	Average 26 secs
Number of sync channels	8
Hope code entry	11 decimal digits, via DTMF keypad
Hop code binary size	56 bits
Possible codes	7.2 x 10 <sup>16</sup>
Hop algorithm	Modified DES

### ENVIRONMENTAL

Operating temperature	-30°C - 60°C
Storage temperature	-30°C - 80°C
Environmental rating	Per MIL-STD 810F Immersion Shock & Vibration



**Q-MAC Electronics Pty Ltd**  
142 Hasler Road  
Osborne Park WA 6017  
Australia

Tel + 618 9242 2900  
Fax + 618 9242 3900

Email info@qmac.com  
Web www.QMAC.com

Specifications are subject to change without notice.

Filename: MX9011 HF-90M Monoblock Manpack.cdr: Date: November 2004

