


PXI/cPCI High-Density, Digital I/O Module Models 1260-1114TTL, 1260-1114CMOS, 1260-1114OC, 1260-1114HVOC

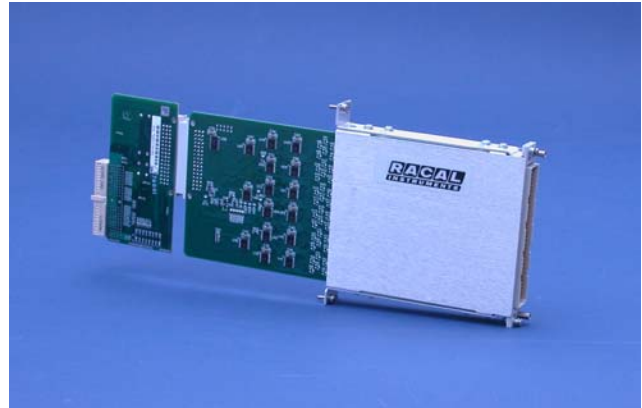

- ◆ **Adapt-a-Switch® High-Density Digital I/O Module on a Racal Instruments PXI Carrier**
- ◆ **Extended Depth (12.1") for High-Density and Market-Leading Performance**
- ◆ **Available 96 TTL/CMOS Channels; 48 HVOC Channels**
- ◆ **Unmatched 8 MHz Data Transfer Speed**

Model 1260-1114, a PXI Digital I/O, is an innovative, seamless integration of an off-the-shelf Adapt-a-Switch® digital I/O module on a Racal Instruments PXI carrier. The module installs in any PXI/cPCI chassis without the need for user supplied software or hardware to install or operate.

The 12.1" module length has market-leading performance that utilizes the available service area between the front of a chassis and a cable/connector receiver. Module 1260-1114 has 85% greater component density than a typical PXI digital I/O module, providing higher digital I/O performance. Its high input data rate of 200 KHz exceeds typical digital I/O slow speed data rates. Also, its 1.5A input current (HVOC) far exceeds typical 150 mA ratings in the market today.

To meet the many customer digital I/O needs, the module is available in TTL, CMOS, OC (standard open collector) or HVOC (high-voltage/current open

collector) I/O channels. Each TTL or CMOS I/O channel may be placed in high-impedance, tri-state mode. Additionally, the CMOS version features TTL level compliance provided the maximum current of the driver is not exceeded (refer to the specifications). The HVOC module is available in a high-voltage/high-current, 48-channel, open-collector version. The OC version can utilize a separate, external, pull-up supply for up to 32 VDC for each independent group, and the HVOC version can utilize a separate, external, pull-up supply for up to 50 VDC. These versions are ideal for controlling external digital circuitry, switches, relays, and similar devices.

Model 1260-1114 has 8 MHz data transfer speed for fast data transfer that is required for timely, uninterrupted data acquisition and processing. For ease of use, and greater programming flexibility, the I/O channels are grouped into 12 separate groups with 8 channels each. Each channel can be configured as an input or output and individually controlled

in asynchronous mode or with other channels in synchronous mode. With a high 960-channel count, each 1260-1114 can address a significant portion of all the required digital I/O's to be captured in a single PXI chassis slot. The module has a 2-wire handshake mode available for the control of synchronous I/O transactions. Each handshake line can be programmed as either active high or active low, providing a flexible interface with user signals.

Model 1260-1114 is programmable in several operating modes and data may be manipulated in hex, decimal, or binary.

In keeping with cPCI requirements, the module can be ordered either as a 5V or 3.3V PXI bus module. The module includes drivers for LabWindows/CVI 5.1 and LabVIEW 7.0.

Model 1260-1114 Specifications

INPUT/OUTPUT

Output Voltage	TTL	CMOS	OC	HVOC
Vout (high)	≥2VDC@15mA	≥3.8VDC@-8mA	5VDC≤Voh≤32VDC	2≤Voh≤50VDC
Vout (low)	≤0.5VDC@24mA	≤0.44VDC@8mA	≤1.5VDC@200mA	≤0.5VDC@1.5A

Input Voltage	TTL	CMOS	OC	HVOC
Vin (high)	≥2VDC	≥2VDC	≥2VDC	≥2VDC
Vin (low)	≤0.8VDC	≤0.8VDC	≤0.8VDC	≤0.8VDC
Vin (max)	5.5VDC	5.5VDC	32VDC	50VDC

Available I/O Channels

TTL: 96 Bi-directional I/O
 CMOS: 96 Bi-directional I/O
 Open-Collector: 96 Bi-directional open-collector channels
 High Voltage: 48 Bi-directional open-collector channels

Configuration

I/O lines selected as either input or output on an 8-bit byte basis

Data Rate

Static to 8 MHz

Channel Synchronization

Asynchronous, Synchronous or Mixed (Synchronous and Asynchronous)

Synchronous Trigger Handshake Polarity

User Programmable

Synchronous Busy Handshake Polarity

User Programmable

INTERFACE DATA

Cooling

Air Flow: 3.0l/s
 Back Pressure: 0.7 mm H₂O

Power Requirements

+5 VDC at 2.5 A maximum with all channels sourcing maximum loads

ENVIRONMENTAL DATA

Temperature

Operating: 0° C to 55° C
 Storage: -40° C to 75° C

Relative Humidity

85% ±5% non-condensing at <30° C

Altitude

Operating: 10,000 ft.
 Non-Operating: 15,000 ft.

Shock

30 g, 11 ms, ½ sine wave

RELIABILITY

MTBF

783,668 hrs. (MIL-STD-217E)

MTRR

<5 min.

MECHANICAL

Weight

38 oz (1.08 kg).

Dimensions

4.5" H x 0.85" W x 12.1" D

Front Panel I/O Interface Connector

160-pin DIN Connector
 30 g, 11 ms, ½ sine wave

Vibration

0.013 in. (pk-pk), 5-55 Hz

Bench Handling

4-inch drop at 45°

EMC

Emissions


EN55011A with limits in accordance with EN50081-1

Immunity

IEC801-2, 3, 4 with limits in accordance with EN50082-1

Safety

EN61010-1

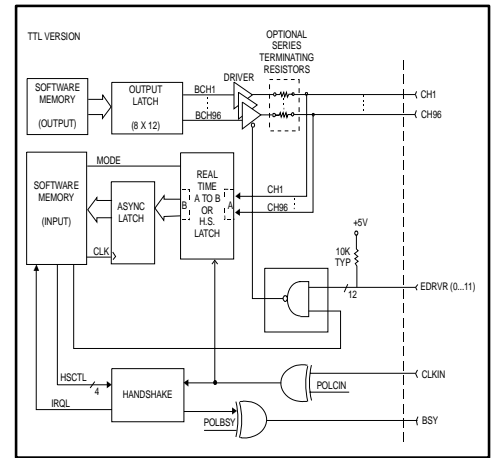

Note: Each switch card requires one mating connector.

CE The CE Mark indicates that the product has completed and passed rigorous testing in the area of RF Emissions, Immunity to Electromagnetic Disturbances and complies with European electrical safety standards.

ORDERING INFORMATION

Model	Description	Part Number
1260-1114TTL-3	PXI, AaS High-Speed, High-Density, Digital I/O, 3.3 V Bus Voltage Plug-in Module, TTL Compatible	1260-1114TT-001
1260-1114TTL-5	PXI, AaS High-Speed, High-Density, Digital I/O, 5 V Bus Voltage Plug-in Module, TTL Compatible	1260-1114TT-002
1260-1114-CMOS-3	PXI, AaS High-Speed, High-Density, Digital I/O, 3.3 V Bus Voltage, CMOS Compatible	1260-1114CM-001
1260-1114CMOS-5	PXI, AaS High-Speed, High-Density, Digital I/O, 5 V Bus Voltage, CMOS Compatible	1260-1114CM-002
1260-1114OC-3	PXI, AaS High-Speed, High-Density, Digital I/O, 3.3 V Bus Voltage, Open Collector	1260-1114OC-001
1260-1114OC-5	PXI, AaS High-Speed, High-Density, Digital I/O, 5 V Bus Voltage, Open Collector	1260-1114OC-002
1260-1114HVOC-3	PXI, AaS High-Speed, High-Density, Digital I/O, 3.3 V Bus Voltage, High Voltage Open Collector	1260-1114HV-001
1260-1114HVOC-5	PXI, AaS High-Speed, High-Density, Digital I/O, 5 V Bus Voltage, High Voltage Open Collector	1260-1114HV-002
408000-001	PXI to AaS Carrier/Enclosure 3.3 V Kit	408000-001
408000-002	PXI to AaS Carrier/Enclosure 5 V Kit	408000-002
407664	160-pin Connector Kit w/Strain Relief	407664
407408-001	160-pin Cable Assembly, 6ft., 24 AWG	407408-001

The Racal Instruments policy is one of continuous development; consequently, the equipment may vary in detail from the description and specification in this publication.

Racal Instruments Inc., 4 Goodyear St., Irvine, CA 92618-2002. Tel: (800) 722 2528, (949) 859 8999; FAX: (949) 859 7139

Racal Instruments Group Ltd., 29-31 Cobham Road, Wimborne, Dorset, BH21 7PF, United Kingdom. Tel: +44 (0) 1202872800; FAX: +44 (0) 1202870810

Racal Instruments France, 18 Avenue Dutartre, 78150 LeChesnay, France. Tel: +33 (1) 3923 2222; FAX: +33 (1) 3923 2225

Racal Instruments Srl, Via Milazzo 25, 20092 Cinisello Balsamo, Milan, Italy. Tel 00-3902-612 3901, Fax 00-3902-612 93606

Racal Instruments GmbH, Technologiepark Bergisch Gladbach, Friedrich-Ebert-Strasse, D-51429 Bergisch Gladbach, Germany. Tel: +49 2204 8442 00, FAX: +49 2204 8442 19

