


Relay Actuator Module Model 1260-12

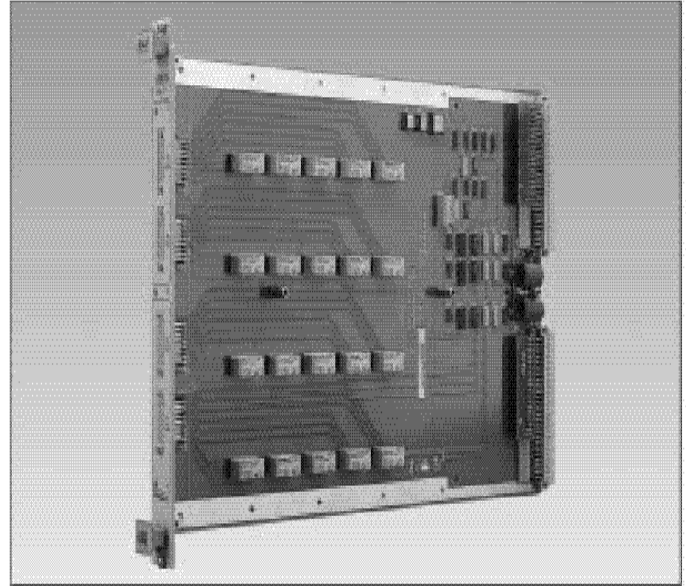

- ◆ **Ideal for General Purpose Switching and Control of External Devices**
- ◆ **Each Channel Switches up to 2A and 220 VDC or 250 VACrms**
- ◆ **20 Channels of DPDT Relays**
- ◆ **Easily Configured to Meet User-defined Network Requirements**
- ◆ **Channels Switched Jointly or Independently**

The 1260-12 is designed for general purpose signal switching and control of external devices. The module provides twenty channels of DPDT switches. The module features separate connections to both sides of the relay contact permitting each channel to be joined with others or to function independently. Custom relay switch networks may be configured with some relays while all remaining channels continue independent operation.

Each channel of the 1260-12 may switch up to 220VDC or 250VACrms at 2Amps.

Relay coils are monitored to provide user selectable confidence checking which gives the user assurance of proper relay operation.

The 1260-12 is controlled by the Option 01 message-based interface which is explained in detail on the Smart Card Module page. All 1260 control features explained on the Option 01 page are available to this module.

1260-12 SPECIFICATIONS

Maximum Switchable Voltage
(Terminal-Terminal or Terminal-Chassis)
220VDC or 250VACrms

Maximum Switchable Current
(DC or ACrms)
Per Channel: 2A

Maximum Switchable Power
Per Channel: 60WDC, 62.5VAC

DC PERFORMANCE

Path Resistance
200mΩ at 2A

Isolation
>10⁹ Ω

AC PERFORMANCE (into 50Ω)

Capacitance
Open Channel: <25pF
Channel-Chassis: <25pF
High-Low: <50pF

Bandwidth (-3dB)
35MHz typical

Insertion Loss
100kHz: <0.2dB
1MHz: <0.25dB
10MHz: <0.5dB

Crosstalk
100kHz: <-75dB
1MHz: <-60dB
10MHz: <-40dB

VXIbus INTERFACE DATA

Cooling Requirements
Airflow: 1.0 liters/sec
Backpressure: 0.05mm H₂O

With Option 01S/T
Airflow: 2.0 liters/sec
Backpressure: 0.2mm H₂O

Power Requirements (I_{pm})
+5V: 0.4A (2.8A w/Opt. 01 installed)
+24V: 10 mA per relay (energized)


Dimensions
C-size, Single-slot VXIbus Module

Weight
2.59 lb (1.17 kg) without Option 01
2.87 lb (1.30 kg) with Option 01

Typical Programming Syntax
Programming syntax is in the form:
“<module address>.<channel>”
Example: CLOSE 3.02
This CLOSE statement will close
channel number 2 on the 1260-12
module at card address 3.

Note: Module is supplied with one set of
mating connectors. Additional connectors
can be ordered using the part numbers
shown below.

Airflow Curve: (Worst Slot)

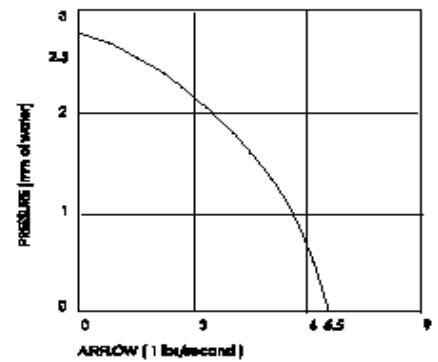

1261E Cooling Curve

ORDERING INFORMATION

Model	Description	Part Number
1260-12	20 Channel, DPDT	404774
Option 01*	Smart Card Module (installed)	OPT-401901-005
601855-034	34-Pin User Connector Body Part (4 supplied)	601855-034
601857	User Connector Solder Type Pins (136 Supplied)	601857
9099-1	Insertion Tool	9099-1
9081-1	Extraction Tool	9081-1

*One Option 01 must be ordered with switch card(s). Please specify the card on which Option 01 will be installed

CE The CE Mark indicates that the product has completed and passed rigorous testing in the area of RF Emissions, Immunity to Electromagnetic Disturbances and complies with European electrical safety standards.

The Racal policy is one of continuous development; consequently, the equipment may vary in detail from the description and specification in this publication.

Racal Instruments Inc., 4 Goodyear St., Irvine, CA 92618-2002. Tel: (800) 722 2528, (949) 859 8999; FAX: (949) 859 7139

Racal Instruments Group Ltd., 29-31 Cobham Road, Wimborne, Dorset, BH21 7PF, United Kingdom. Tel: +44 (0) 1202872800; FAX: +44 (0) 1202870810

Racal Instruments France, 18 Avenue Dutarte, 78150 LeChesnay, France. Tel: +33 (1) 3923 2222; FAX: +33 (1) 3923 2225

Racal Instruments Srl, Via Milazzo 25, 20092 Cinisello Balsamo, Milan, Italy. Tel 00-3902-612 3901, Fax 00-3902-612 93606

Racal Instruments GmbH, Technologiepark Bergisch Gladbach, Friedrich-Ebert-Strasse, D-51429 Bergisch Gladbach, Germany. Tel: +49 2204 8442 00, FAX: +49 2204 8442 19

