

FIBER OPTIC CONNECTORS & COMPONENTS

PRO BEAM[®] Series

Expanded Beam Field Deployable Interconnects



RADIALL 
The next connexion

The ultimate choice for field applications


PRO BEAM[®] series

In addition to the broad range of Radiall fiber optic interconnect solutions, from single fiber links up to complex multichannel fiber optic harnesses including the LuxCis[®] Arinc 801 propriarity design. Radiall offers a new solution for field rapid deployment application in harsh environments. The PRO BEAM[®] series includes now the Junior and Mini design.

MAIN FEATURES AND BENEFITS

- **Dedicated for field:** indoor and outdoor applications,
- **Expanded Beam interconnect technology:** easy to clean, low sensitivity to thermal changes and pollution,
- **Robust construction with shock absorber protection:** very high mating level (3000 mating cycles), no physical contact between the optical path of each connector, high resistance to shocks and vibrations,
- **Hermaphroditic design:** direct "Plug to Plug" or "Plug to Receptacle" connection, easy and great flexibility for cable assemblies management on the field,
- **Modular fiber system up to 4 fiber optic channels,**
- **High precision alignment:** excellent performance in singlemode and multimode applications,
- **Waterproof design:** for all weather and field conditions,
- **EMI:** total immunity.

EXPANDED BEAM TECHNOLOGY

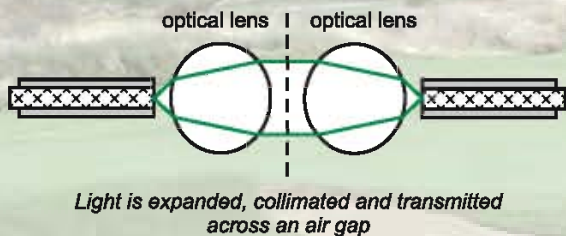

About the expanded beam technology, each connector has an optical lens in order to increase the very small diameter of the light beam travelling inside the fiber core, the light is transmitted to the other connector across an air gap and then collimated into the receiving fiber. As there is no mechanical contact between the optical lens, the connector will handle a high number of mating cycles without any risk of damaging any optical parts. On each front face of the connector, the optical face can be cleaned easily as there is no cavity or protuberance, and the large beam is less sensitive to pollution compared to a direct light beam from the fiber itself.



Applications

Field-deployable military communication systems, avionics, naval, broadcast, oil research, railway, ...


and all applications in harsh environment requiring:

Strength, durability and reliable performance in conditions of multiple interconnection operations, blind mate situation, high vibration level, extreme temperature, ...




CABLE REELS SOLUTIONS (DEDICATED FOR FIBER OPTIC USE)

Steel cable drum with handle crank

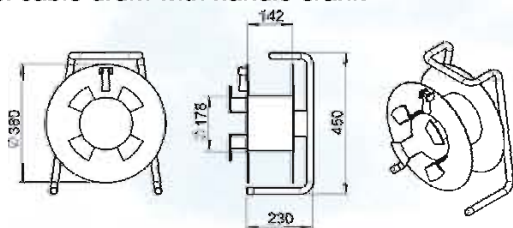

Type	Size A	Size B	Size C
Weight (empty)	5.90 Kg	8.20 Kg	13.90 Kg
Capacity with 5.5 mm cable	Up to 300 m	Up to 500 m	Up to 800 m

Backpack/trolley for tactical field deployment cable: aluminum structure, anodized green color

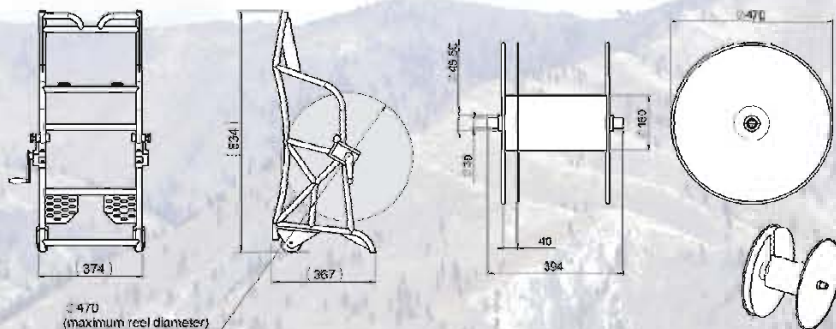

Weight (backpack)	6.80 Kg
Weight (empty reel for backpack)	4.80 Kg
Capacity with 5.5 mm cable	Up to 900 m

Recommendation: when ordering cable assemblies on backpack reel also order the backpack harness P/N F718 200 000
For total weight, add 0.03 kg/meter of 5.5 mm cable + add 0.125 kg per connector

FIBER OPTIC CABLE

Multichannel optical cable, very flexible, lightweight and rugged cable for indoor and outdoor application. Composed of tight structure, from 2 to 4 channels with 50/125, 62.5/125 or 9/125 sheathed 900 μ m fiber, in accordance with the terms and conditions of the UTE NF-C-93850 recommendations, making it especially suitable for application requiring good mechanical load, as well as tensile compression to meets the demands of field and industrial used. It has no metal component inside and is composed of a flame retardant jacket which meets the NF-C-32070 -C1 and CIS 332-3C standards.

CABLE CHARACTERISTICS

Outside diameter	5.5 mm
Weight	30 kg/km
Bend radius under installation	120 mm
Bend radius under long term	60 mm
Operating load	100 daN
Crush resistance	500 daN/dm
Storage temperature	-50 to +85°C
Operating temperature	-40 to +85°C

FIBER CHARACTERISTICS

Fiber type	50/125	62.5/125	9/125
NO	0.21	0.26	-
Att Max @ 850 nm	3.2 dB/km	3.5 dB/km	-
Att Max @ 1300 nm	1.2 dB/km	1.5 dB/km	-
Att max @ 1310 nm	-	-	0.4 dB/km
Att max @ 1550 nm	-	-	0.3 dB/km
Bandwidth @ 850 nm	≥ 400	≥ 160	
Bandwidth @ 1300 nm	≥ 800	≥ 500	

OPTICAL TEST SET FOR FIBER OPTIC PRO BEAM® CABLES

The equipment allows you to test your fiber optic network or your cable drum on the field.
Includes an optical source and a power meter dedicated up to the 4 fibers of the PRO BEAM® connector.
Battery powered, easy to use and rugged design (weather proof) for field application.



CABLE ASSEMBLIES PLUG TO PLUG STYLE

- Singlemode 9/125 or multimode 50 & 62.5/125 fiber,
- 2 & 4 channels,
- Plug Epdm or fluorosilicone* rubber protection,
- Cable diameter: 5.5 mm (or according to customer specification),
- Different types of reels available, depending on cable length.

*Junior PRO BEAM® type only

CABLE ASSEMBLIES WITH RECEPTACLE STYLE

- Singlemode 9/125 or multimode 50 & 62.5/125 fiber,
- 2 & 4 channels,
- D Hole flange standard receptacle for 5.5 mm cable,
- D Hole flange fan-out receptacle for 1.6 mm cable,
- Square flange standard receptacle for 5.5 mm cable,
- Square flange fan-out receptacle for 1.6 mm cable,
- Fan-out can be terminated with standard interface connectors (LC, SC, FC, LuxCis®, etc...).

MAIN CHARACTERISTICS

Optical	Insertion loss (typical against a reference plug)	
	Multimode 1300 nm	0.7 dB
	Singlemode 1310 nm or 1550 nm	0.7 dB
	Return loss (typical against a reference plug)	
	1310 nm or 1550 nm	> 34 dB
Mechanical	Vibration sinusoidal	10-500 Hz 3 directions, 0.75 mm amplitude, 10 g acceleration
	Free fall on concrete, severity 1.2 m	500 falls
	Shocks	4000 shocks, 6 directions @ 50g acceleration
	Mating endurance	3000 cycles
Environmental	Operating temperature	-40°C/+85°C
	Storage temperature	-55°C/+85°C
	Humidity (damp heat)	95% HR
	Immersion, plug and receptacle, Junior style	15 m depth



QSE (Quality Safety Environment) POLICY

Radiall maintains a quality management system conforming to international standards, including for environmental protection. Our customer's recognition for the quality of our products and the sustainability of our company, demonstrates the efficiency of our quality system.

CERTIFICATIONS

Certified ISO 9001 since 1994, Radiall has a pro-active policy in terms of conforming to international standards. Today, all Radiall sites are certified to ISO 9001:2000 and some dedicated activities are AS9100 or TS 16949. Our process approach gives us the tool for continuous improvement in all our activities.



■ Sales & production subsidiary
 ▲ Industrial site
 ● Sales subsidiary



Radiall.com

RADIALL WORLDWIDE LOCATIONS

EUROPE

France - RADIALL HEADQUARTERS

101, Rue Ph. Hoffmann - 93116 ROSNY sous BOIS (Paris)
 Tel. : +33 1 49 35 35 35 Fax : +33 1 48 54 63 63
 E-Mail : info@radiall.com

Finland - RADIALL SF

P.O. Box 202 - 90101 OULU
 Tel. : +358 407 522 412
 E-Mail : infofi@radiall.com

Germany - RADIALL GmbH

Carl-Zeiss Str. 10 Postfach 200143 - D63307 RÖDERMARK (Frankfurt)
 Tel. : +49 60 74 91 07 0 Fax : +49 60 74 91 07 70
 E-Mail : info@radiall.com
 Regional office : Munich

Italy - RADIALL Elettronica SRL

Via Concordia, 5 - 20090 ASSAGO MILANO
 Tel. : +39 02 48 85 121 Fax : +39 02 48 84 30 18
 E-Mail : infoit@radiall.com
 Regional office : Roma

Netherlands - RADIALL BV

Hogebrinkerweg 15b - 3871 KM HOEVELAKEN
 Tel. : +31 33 253 40 09 Fax : +31 33 253 45 12
 E-Mail : infonl@radiall.com

Sweden - RADIALL AB

Sjöängsvägen 2 - SE-192 72 SOLLENTUNA (Stockholm)
 Tel. : +46 844 434 10 Fax : +46 875 449 16
 E-Mail : infose@radiall.com

U.K. - RADIALL Ltd

Ground Floor, 6 The Grand Union Office Park, Packet Boat Lane
 UXBRIDGE Middlesex UB8 2GH (London)
 Tel. : +44 1895 425 000 Fax : +44 1895 425 010
 E-Mail : infouk@radiall.com

AMERICA

North America

RADIALL

6825 West Galveston Street Suite 11
 CHANDLER, Arizona 85226, USA
 Tel. : +1 480 682 9400 Fax : +1 480 682 9403
 E-Mail : infousa@radiall.com

RADIALL-AEP

104 John W. Murphy Drive
 NEW HAVEN, Connecticut 06513
 Tel. : +1 203 776 2813 Fax : +1 203 776 8294
 E-Mail : aeppales@aep.us

Brazil

RADIALL do Brasil

Largo do Machado, 54 sala 706 - Catete
 22221-020 RIO DE JANEIRO
 Tel. : +55 21 2558 05 78 Fax : +55 21 2245 97 63
 E-Mail : info@radiall.com

ASIA

China - SHANGHAI RADIALL Electronic Co., Ltd

N° 390 Yong He Road 200072 - SHANGHAI
 Tel. : +86 21 66 52 37 88 Fax : +86 21 66 52 11 77
 E-Mail : infosh@radiall.com

Japan - NIHON RADIALL

Shibuya-ku Ebisu 1-5-2, Kougetsu Bldg 405-TOKYO 150-0013
 Tel. : +81 3 3440 6241 Fax : +81 3 3440 6242
 E-Mail : infojp@radiall.com

HongKong - RADIALL Electronics Ltd

Elite Industrial Centre, Room 212, 2/F
 N° 883 Cheung Sha Wan Road - KOWLOON HONG KONG
 Tel. : +852 29 59 38 33 Fax : +852 29 59 26 36
 E-Mail : infohk@radiall.com


India - RADIALL PROTECTRON pvt Ltd

25 D, II Phase, Peenya Industrial Area - BANGALORE 560058
 Tel. : +91 80 23 72 09 89 Fax : +91 80 28 39 72 28
 E-Mail : infoin@radiall.com

REPRESENTED IN

Africa	Greece	Russia	Thailand
Australia	Israël	Singapore	Taiwan
Belgium	Malaysia	Spain	Turkey
China	Philippines	South Africa	USA
Denmark	Poland	South Korea	
France	Portugal	Switzerland	

For the above countries, please contact the local agent or RADIALL at info@radiall.com



This information is intended as a guide only. To ensure a continuing policy of product improvement, Radiall reserves the right to modify its specifications without prior notification.

D6F210DE - 2008 June Edition

RADIALL
 The next connexion



Printed in France