




Series  
DSX

SIZE 16 PIN CONTACT  
SIZE 16 CRIMP - REMOVABLE  
CONTACT NORMALISE MIL ( M39029/11-146)

Issue:  
JANUARY 24 02

Page  
1 / 1

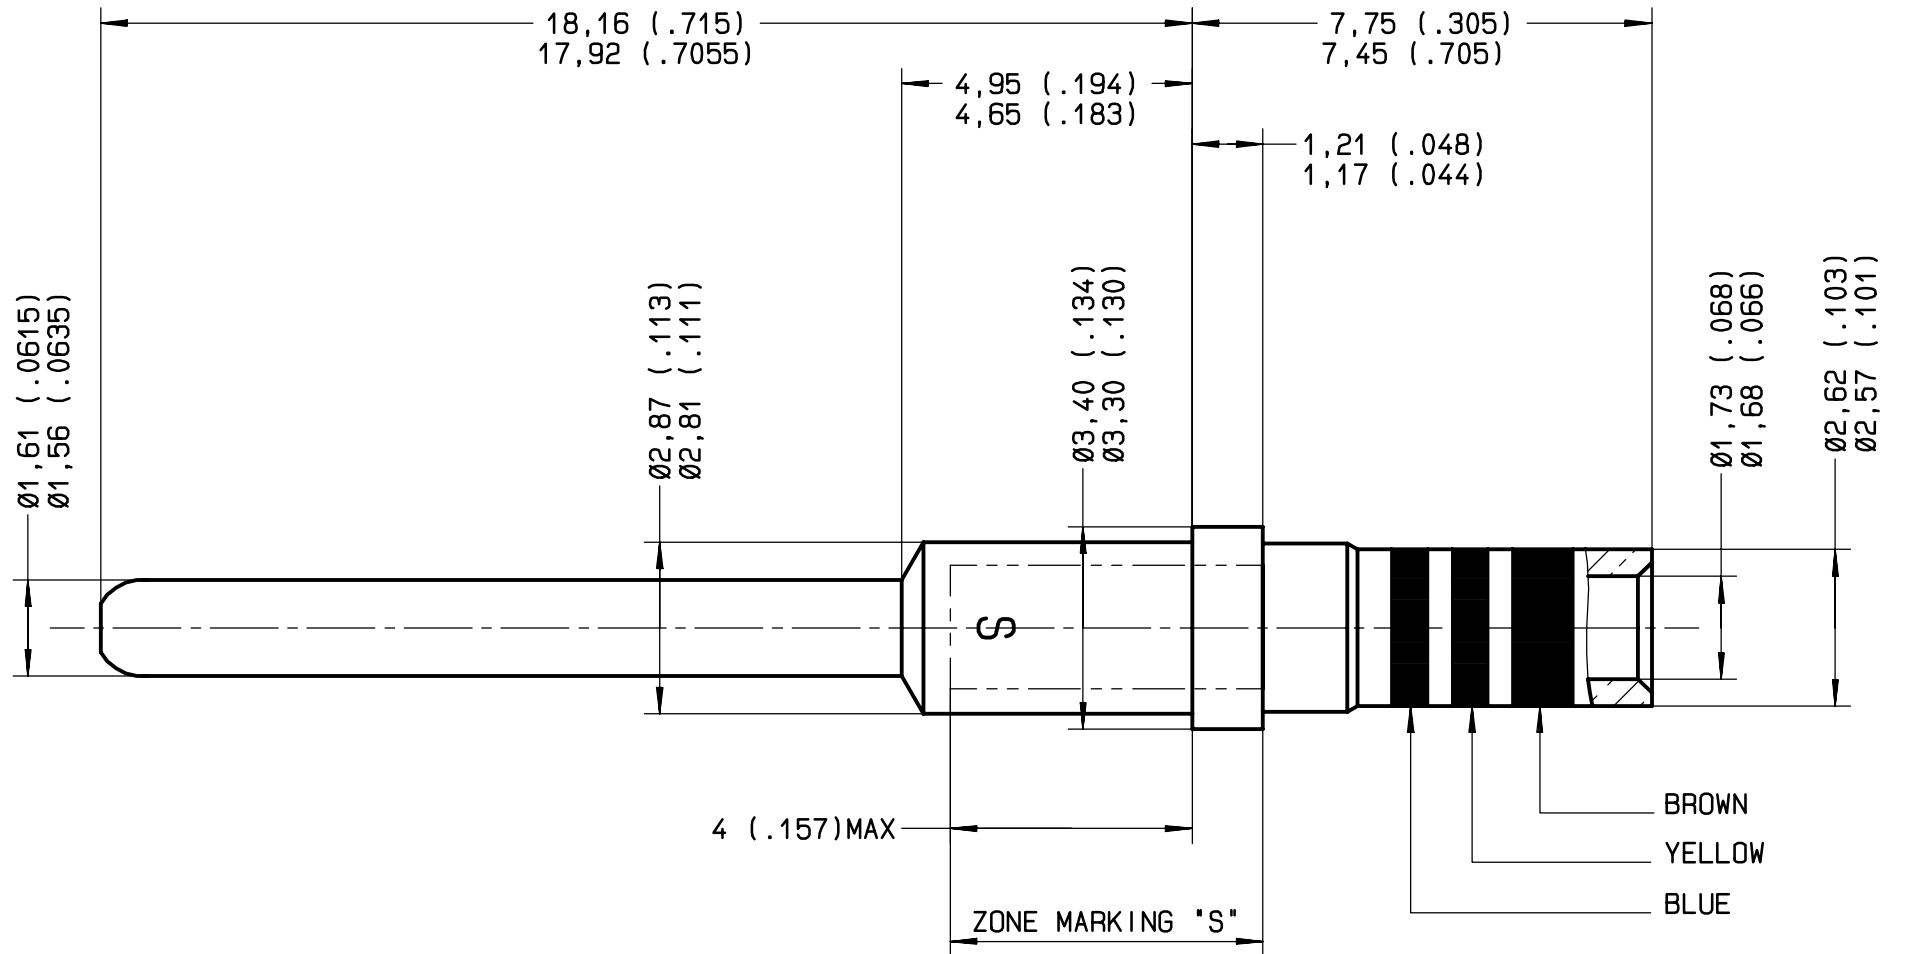

MATERIAL : LEADED BRASS  
PLATING : GOLD .00005 INCH THICK PER MIL-G-45204 TYPE I OR II GRADE C OR D  
OVER NICKEL .00005 INCH THICK PER QQ\_N\_290 UNDERPLATE

WIRES ACCOMODATED :AWG 16, 18 AND 20  
INSULATION DIAMETER : 2,61mm (.103) MAX  
STRIP LENGTH : 6mm (.236)

TOOLING :  
CRIMPING TOOL : M22520/1-01 (RADIALL 282291)  
REGLAGE : 6 FOR AWG 16  
5 FOR AWG 18  
4 FOR AWG 20  
POSITIONER : M22520/1-02(RADIALL 282972)

INSERTION/EXTRACTION TOOL : RADIALL 282546 (M81969/1-03)

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112-9610

CREATION	.	.	.	.
PEN: /	.	.	.	.
NOM: FATELLI	.	.	.	.
DATE: 22/3/85	.	.	.	.
APPR.: .	JAN 24 02	ADD ZONE MARKING "S"	COUTHON	GOMBERT
	Issue	Revisions	Name.	Approved