RADIALL®
MULTICONTACT CONNECTORS

TECHNICAL DATA SHEET

618 304 003

Series		Issue:	Page
MPX	SIZE 22 FRONT RELEASE. FRONT REMOVABLE TIN LEAD DEPOSIT ON PC POST SOCKET CONTACT .	22/04/99	1 / 1

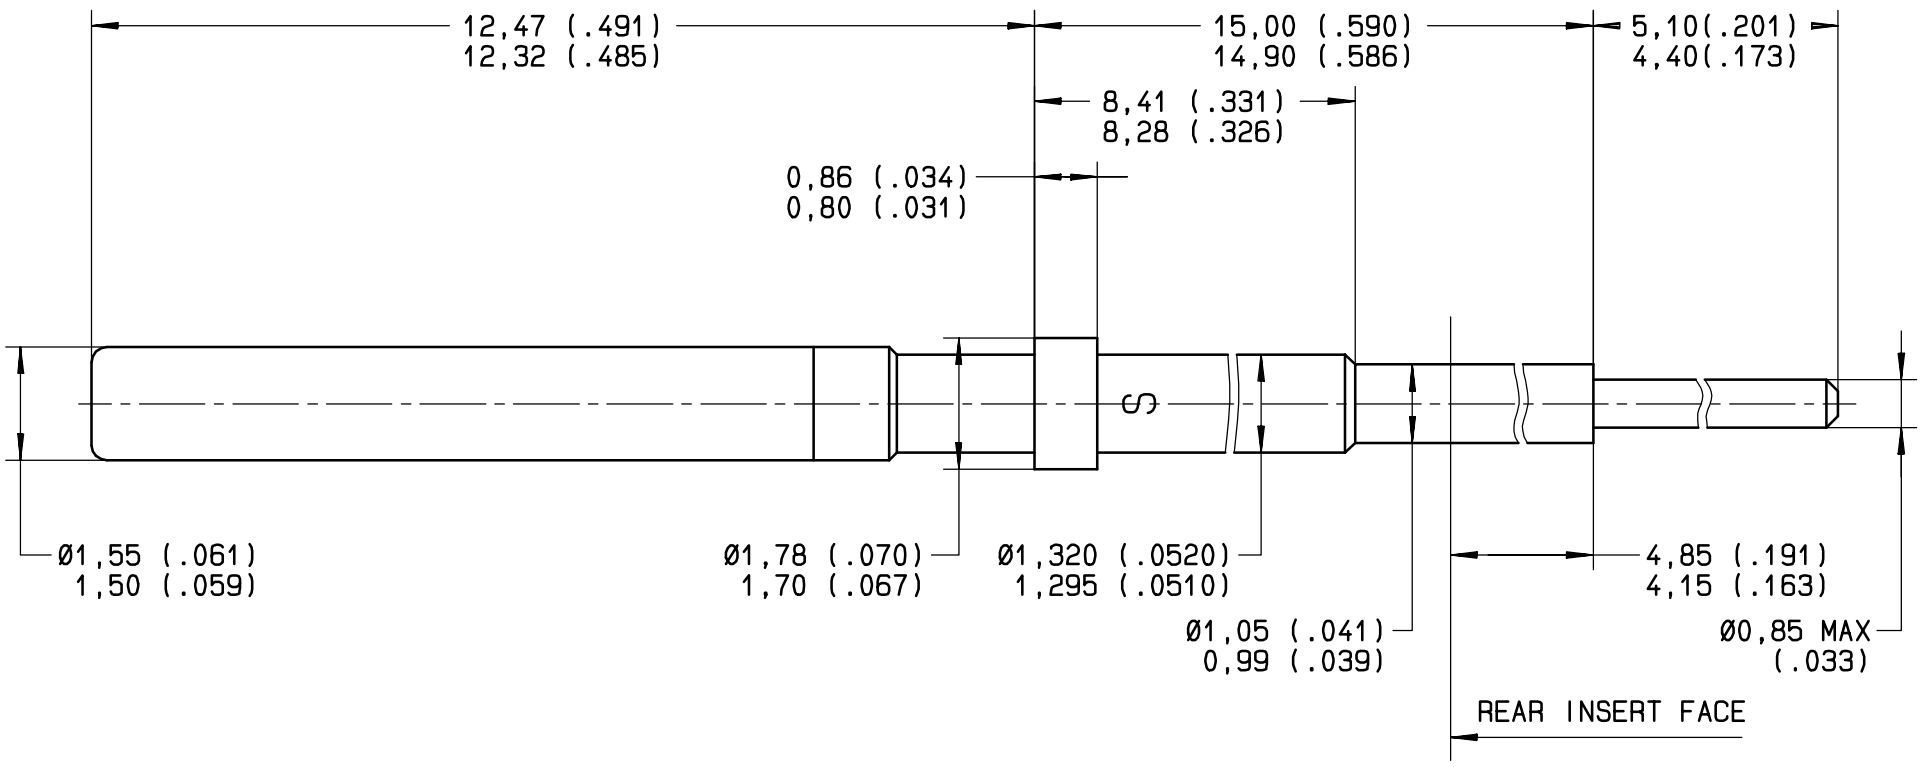

MATERIAL:
 BODY: BERYLLIUM COPPER PER ASTM-B-196
 PROTECTIVE SLEEVE: STAINLESS STEEL PER AISI 305

FINISH:
 BODY: .00005 INCH OF GOLD PER MIL-G-45204 TYPE I OR II, GRADE C OR D, CLASS 1 OVER NICKEL PER QQ-N-290
  PWD SOLDER CONTACT AREA WHICH IS TIN LEADED PER QQ-S-571
 PROTECTIVE SLEEVE: PASSIVATED PER QQ-P-35

INSERTION/EXTRACTION TOOL: RADIALL 282500

This information is given as an indication.In the continual goal to improve our products,we reserve the right to make any modifications judged necessary.

CREATION	Issue	Revisions	Name	Approved
PEN: M990009330A				
NOM: MACARI				
DATE: 22/04/99				
APPR.:				

RADIALL®
101,rue Philibert Hoffmann_Z.I.Ouest
93116 ROSNY/BOIS Cedex (France)
Tl.:01 49 35 35 35
Fax.:01 48 54 63 63
Tlex:RADIA 235220