



Series  
NSX


SIZE 1 COAX FOR E-0406WD CABLE

Issue:  
7 FEB.95


Page  
1 / 1

OUTER CONTACT AND RETENTION PLATE  
SUB ASSY


DIELECTRIC

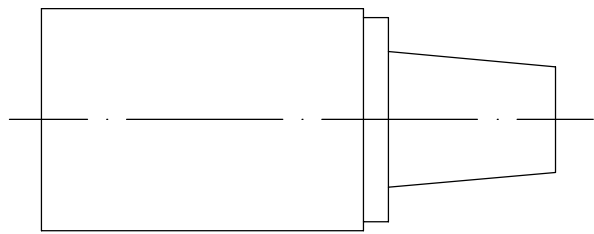


CRIMP BARREL

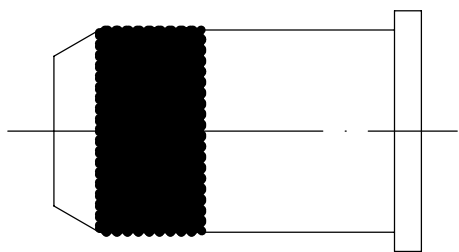

DIELECTRIC  
WASHER




CENTER CONTACT




SHRINKABLE SLEEVE



FERRULE

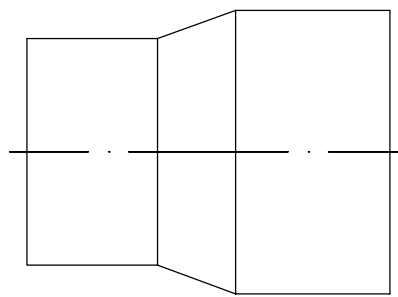

CLAMP NUT



WIRING INSTRUCTIONS - SEA DRAWING RP 2799

CRIMPING TOOL

OUTER CONTACT

TOOL M22520/5-01 (RADIALL 282293)

DIE M22520/5-61 (RADIALL 282247)

CENTER CONTACT

TOOL M22520/1-01 (RADIALL 282291)

POSITIONER M22520/1-13 (RADIALL 282997)

ELECTRICAL CHARACTERISTICS

IMPEDANCE : 50Ω

VSWR: 1,3 10 MHz TO 5 GHz

DIELECTRIC WITHSTANDING VOLTAGE: 1500 V

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112\_9311

CREATION

PEN:

NOM: BALDYROU

DATE: 7 FEB.95

APPR.:

|       |           |      |          |  |
|-------|-----------|------|----------|--|
|       |           |      |          |  |
|       |           |      |          |  |
|       |           |      |          |  |
|       |           |      |          |  |
| Issue | Revisions | Name | Approved |  |

A2010801