




Series
NSX

SIZE 1 SOCKET COAX
FOR FILOTEX CABLE 50 MF CFB
/


Issue:
09 MAY 00

Page
1 / 1


DIELECTRIC

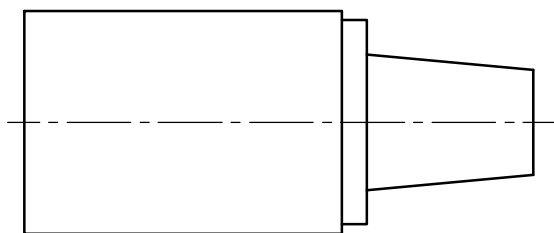

OUTER CONTACT AND RETENTION PLATE
SUB ASSY

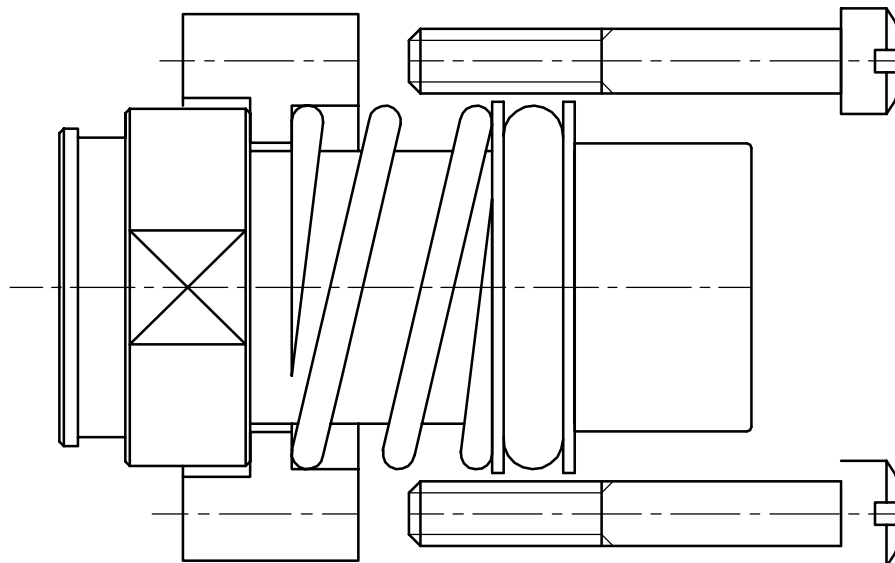

BRAID CLAMP

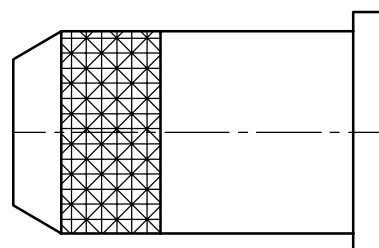


WASHER




INNER CONTACT




SHRINKABLE SLEEVE

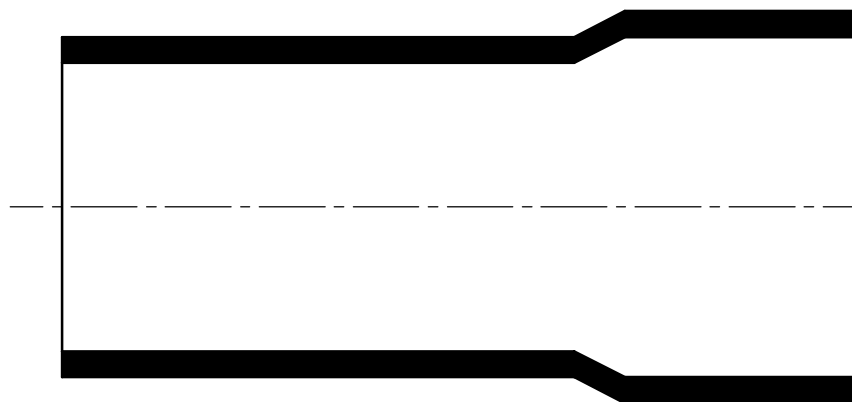

FERRULE

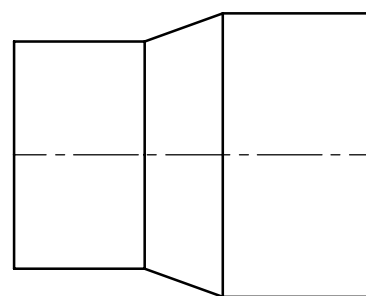

CLAMP NUT

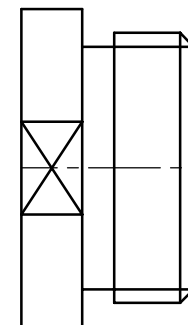

NOTA : O-RING DELIVRED LUBRICATED
WIRING INSTRUCTION, SEE RP2799

CRIMPING TOOLS :
OUTER CONTACT
TOOL M22520/5-01 (RADIALL 282 293)
DIE M22520/5-61 (RADIALL 282 247)
INNER CONTACT
TOOL M22520/1-01 (RADIALL 282 291) SELECTOR ON 8
POSITIONNER M22520/1-13 (RADIALL 282 997) RED TURRET

ELECTRICAL CHARACTERISTICS :
IMPEDANCE 50 OHMS
VSWR 1,3 10MHz TO 5GHz
DIELECTRIC WITHSTANDING VOLTAGE 1500V

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112-9610

CREATION
PEN: /
NOM: HASCOET
DATE: 09 MAY 00
APPR.:
	Issue	Revisions	Name	Approved