




Series  
NSX

SIZE 1 SOCKET COAX  
FOR CABLE RG400  
/


Issue:  
09 MAY 00

Page  
1 / 1


DIELECTRIC

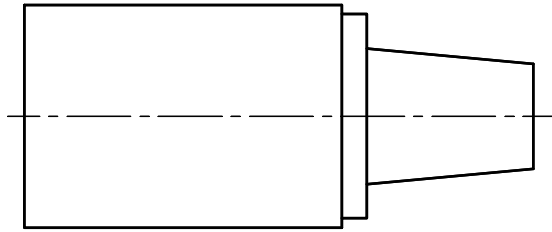

OUTER CONTACT AND RETENTION PLATE  
SUB ASSY

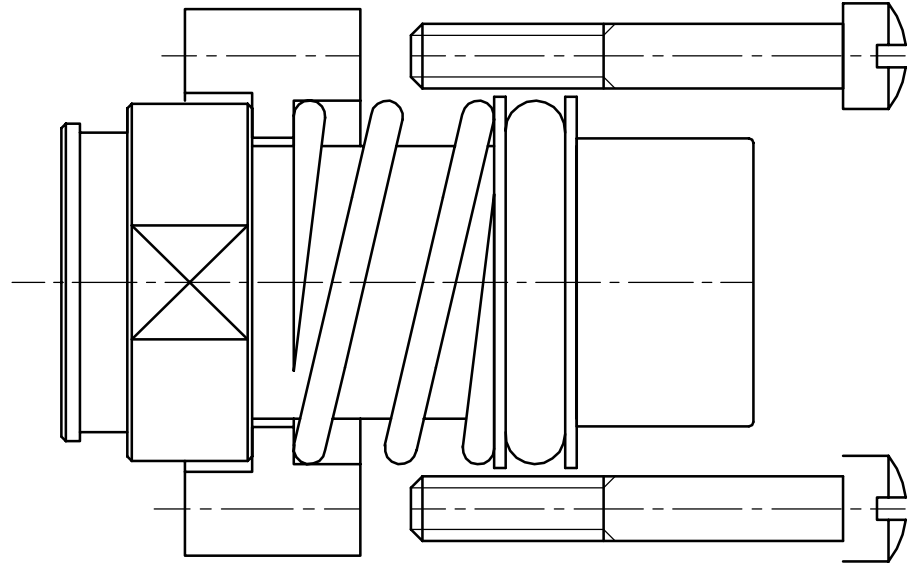


BRAID CLAMP




WASHER




INNER CONTACT




SHRINKABLE SLEEVE

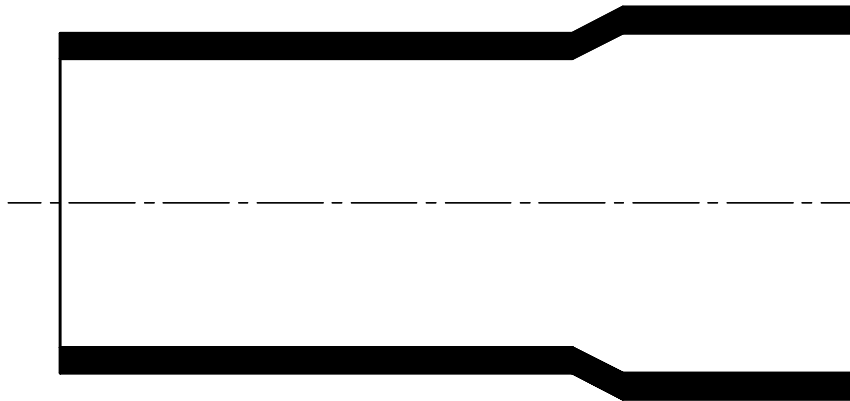

FERRULE



CLAMP NUT

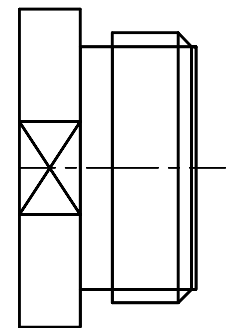

NOTA : O-RING DELIVRED LUBRICATED

WIRING INSTRUCTION, SEE RP2798

CRIMPING TOOLS :

OUTER CONTACT

TOOL M22520/5-01 (RADIALL 282 293)  
DIE M22520/5-05 (RADIALL 282 246) HEX A

INNER CONTACT

TOOL M22520/1-01 (RADIALL 282 291) SELECTOR ON 8  
POSITIONNER M22520/1-13 (RADIALL 282 997) RED TURRET

ELECTRICAL CHARACTERISTICS :

IMPEDANCE 50 OHMS  
VSWR 1,3 10MHz TO 5GHz  
DIELECTRIC WITHSTANDING VOLTAGE 1500V

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112-9610

CREATION	.	.	.	.
PEN: /	.	.	.	.
NOM: HASCOET	.	.	.	.
DATE: 09 MAY 00	.	.	.	.
APPR.: .	.	.	.	.
	Issue	Revisions	Name	Approved