


620 120 001


SIZE 5 COAXIAL PIN CONTACT
FOR RG 58 AND RG 141

SERIE
NSX

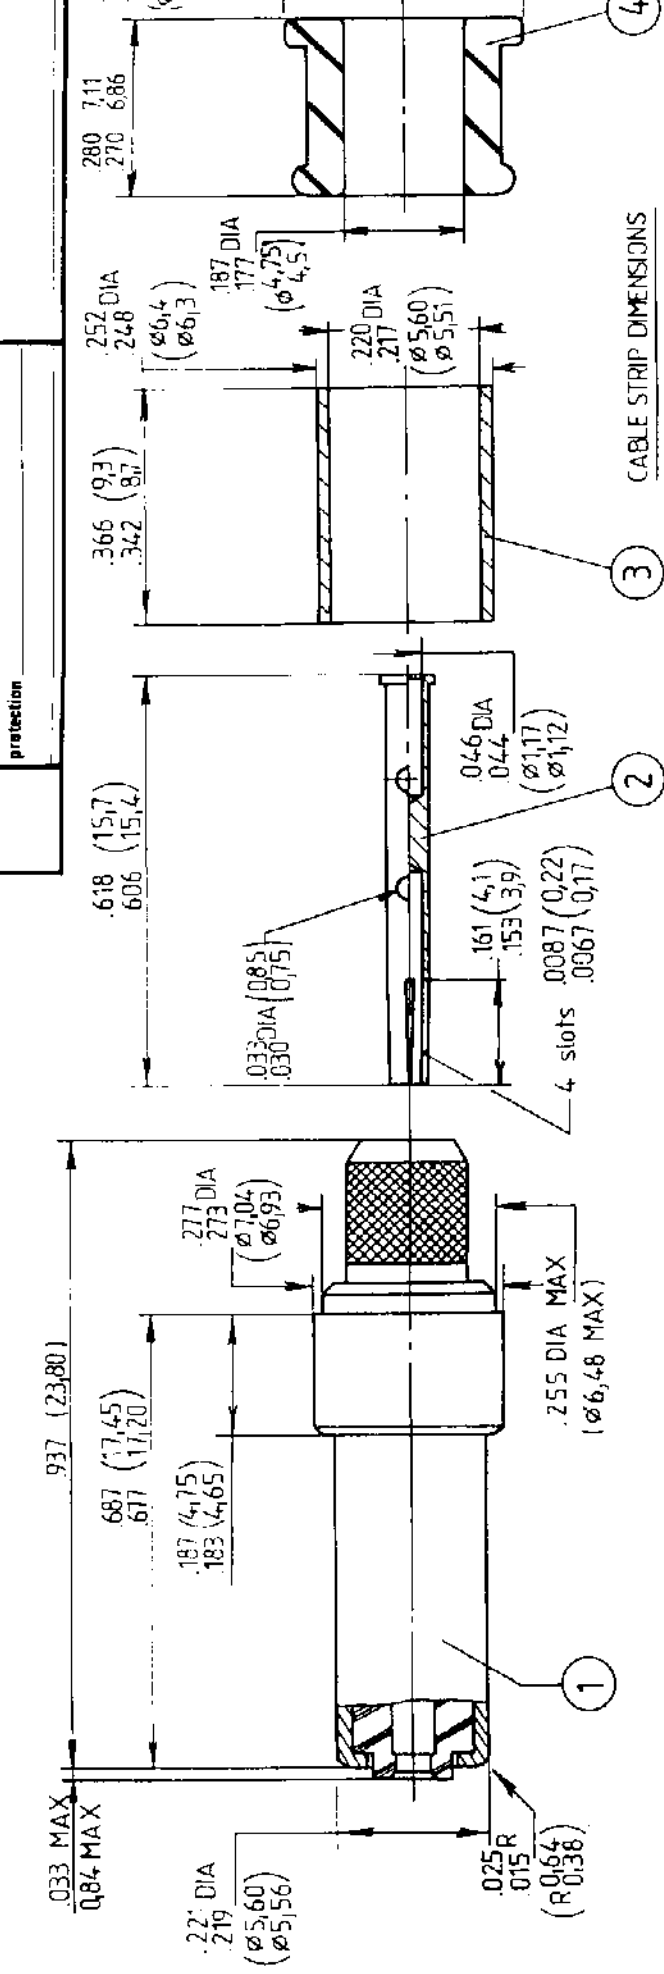

CABLE STRIP DIMENSIONS

PERFORMANCE:
 INSULATION RESISTANCE: 5000 MEGOHMS
 DIELECTRIC WITHSTANDING VOLTAGE: 750V RMS AT SEA LEVEL
 WSWR: 1,3 : 1
 FREQUENCY RANGE: 0 TO 500 MHZ
 IMPEDANCE: 50 OHMS

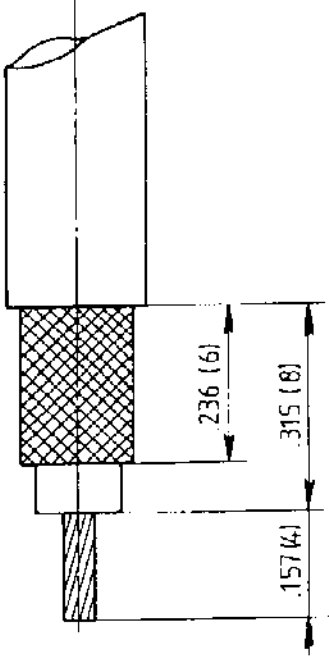

TOOLING: SKT CONTACT: CRIMPING TOOL: M 22520/2_01
 SELECTOR POSITION: 6 FOR RG 58 - 8 FOR RG 141
 POSITIONER: K345
 OUTER CONTACT: CRIMPING TOOL: M 22520/5_01
 DIE: M 22520/5_45 HEX.B OR M 22520/5_05 HEX.A
 EXTRACTION TOOL: M 81969/28_01

ITEM	PART NUMBER	PART NAME	MATERIAL	FINISH	QTY
4	925 05 553	SEALING BOOT	FLUROSILICONE		1
3	520 14 222	FERRULE	ANNEALED BRASS	GOLD 00005 OVERNICKEL	1
2	324 12 072	CENTER CONTACT	BERYLLIUM COPPER	GOLD 00005 OVERNICKEL	1
1	874 03 143	CRIMP BARREL	COPPER ALLOY	GOLD 00005 OVERNICKEL	1
		INSULATOR	TEFLON		1
		OUTER CONTACT	LEADED BRASS	GOLD 00005 OVERNICKEL	1

RADIALL
CONNECTEURS MULTICONTACTS

DES. LE. 6-5-90 RUGO. GEN.

NOM. FALETTI VERIF. LE.

NOM. ECH.

CE DOCUMENT EST LA PROPRIETE DE LA SOCIETE RADIALL
 IL NE PEUT ETRE REPRODUIT NI COMMUNIQUE A
 DES TIERS SANS AUTORISATION ECRITE.

matiere:

traitement:

IND	MODIFICATIONS	DATE	VISA	IND	MODIFICATIONS	DATE	VISA