


Séries NSX	SIZE 5 PIN COAX CONTACT FOR S280W503-2 CABLE BOEING P/N: BACC47EV-4	Issue: 09 FEB. 94	Page 1 / 1
---------------	---	----------------------	---------------

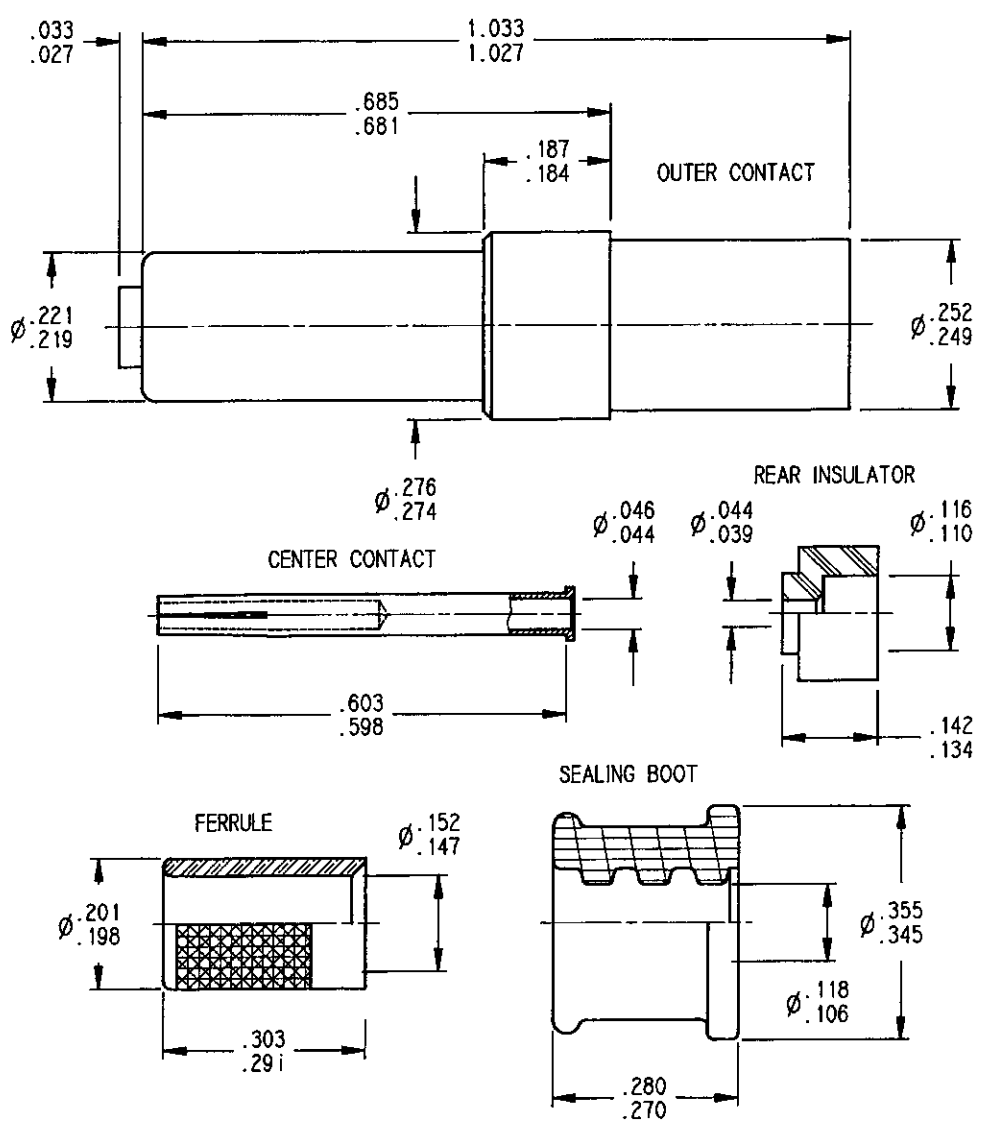

MATERIAL:
 OUTER CONTACT: BRASS PER QQ-B 626
 INSULATOR: TPFE
 CENTER CONTACT: BERYLLIUM COPPER HEAT TREATED FOR SPRING TINES _ANNEALED ON CRIMP BARREL_
 FERRULE: BRASS
 SEALING BOOT: SILICONE ELASTOMER
FINISH (ALL METAL PARTS)
 GOLD PLATE PER MIL_G_45204: 50 MICROINCHES OVER NICKEL

DESIGN REQUIREMENTS
 TEMPERATURE RANGE: -65°C TO +165°C
 IMPEDANCE: 50 OHMS NOMINAL
 RATED VOLTAGE: 325 V RMS AT SEA LEVEL
 VSWR: 1.30:1
 FREQUENCY RANGE: 0 - 500 MHZ
 CONTACT RESISTANCE: 1.0 MILLIOHMS MAX (OUTER CONTACT)
 DIELECTRIC WITHSTANDING VOLTAGE: 750 VRMS AT SEA LEVEL

CONTACT SHALL ASSEMBLE USING TOOLING AND STRIP LENGTHS ACCORDING TO RP06710

CREATION				
PEN:				
NOM: JP MACARI				
DATE: 23 DEC. 93	09.02.94	CHANGE FERRULE SHAPE Ø.201/.198 WAS .193/.191 Ø.152/.147 WAS .150/.147	JP MACARI	<i>JP Macari</i>
APPR.: <i>JP Macari</i>	Issue	Revisions	Name	Approved

This information is given as an indication. In the confidential goal to improve our products, we reserve the right to make any modifications judged necessary.