




Series  
TCX

SIZE 16 CRIMP REMOVABLE SOCKET CONTACT

JN1123 CS 16

Issue:  
01 MARCH 2002

Page  
1 / 1

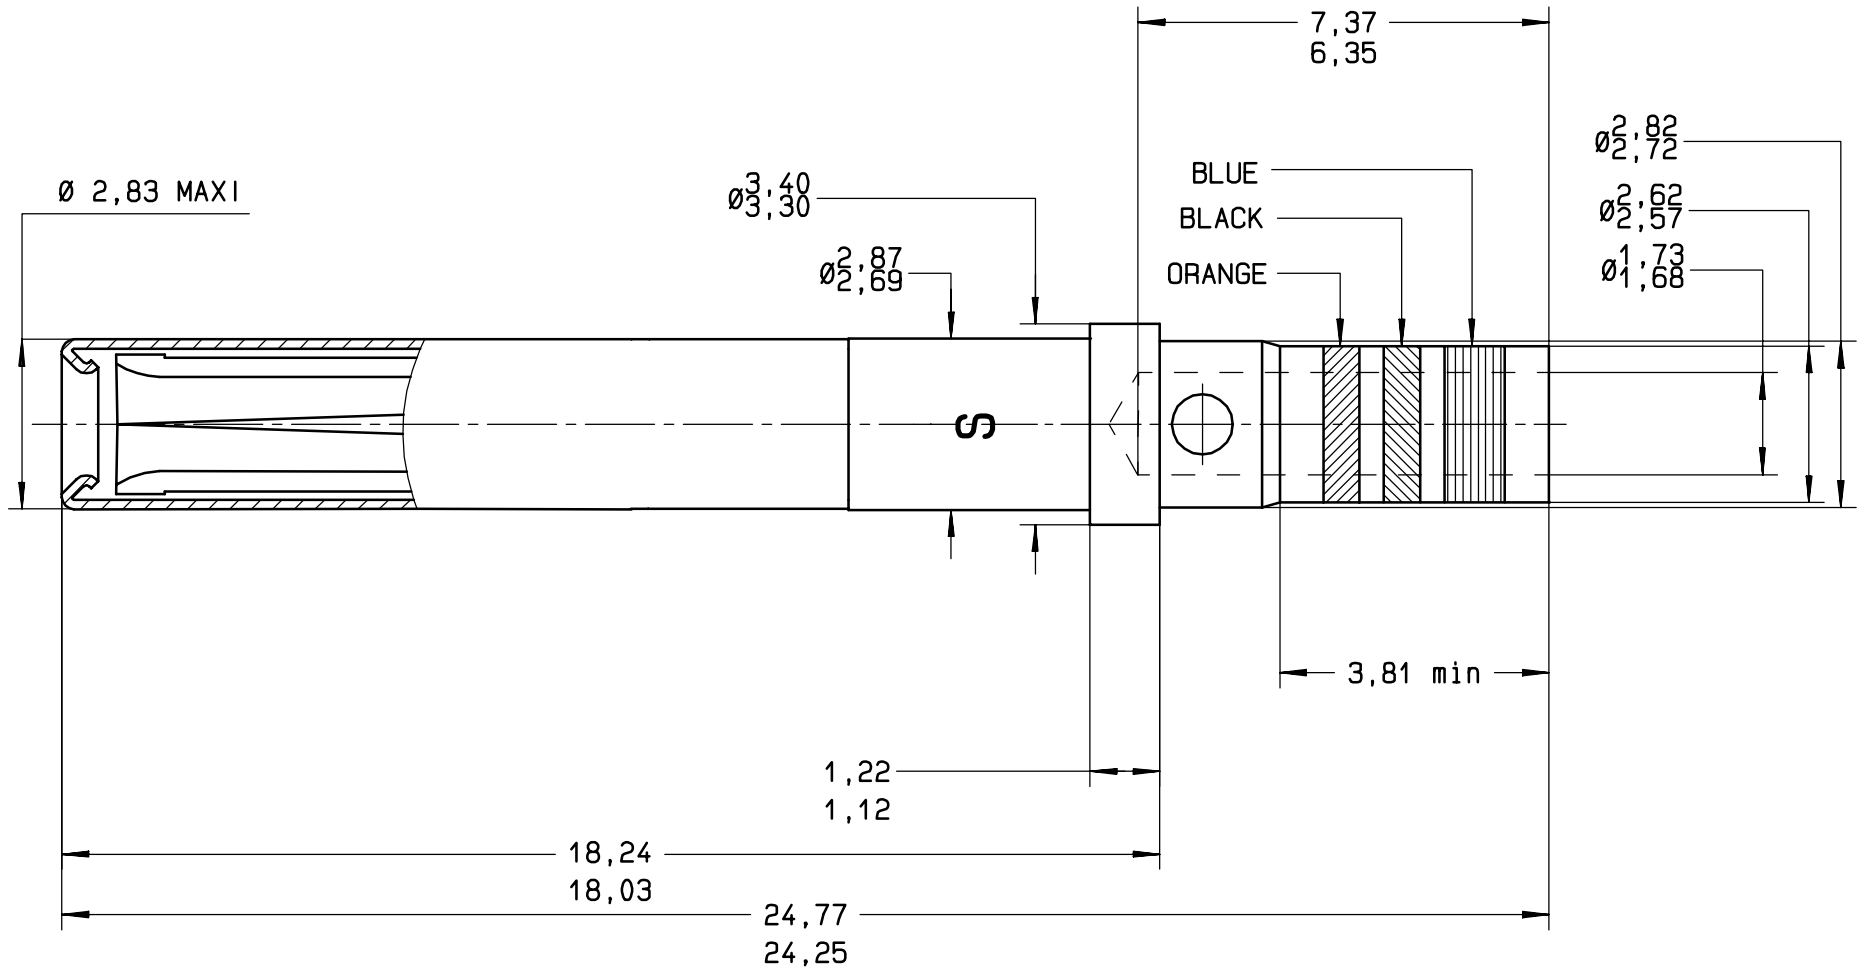

**MATERIAL :**

BODY CONTACT : BERYLLIUM COPPER ALLOY PER ASTM-B-196  
PROTECTIVE SLEEVE: STAINLESS STEEL PER AISI 305

**FINISH :**

CONTACT BODY : PLATING .00005 INCH OF GOLD PER MIL-G-45204 TYPE I OR II GRADE C OR D  
CLASS 1 OVER NICKEL PER QQ-N-290  
PROTECTIVE SLEEVE: PASSIVATED PER QQ-P-35

**WIRES ACCOMODATED :** AWG 16-18-20

INSULATOR DIAMETER: 2,03 MAX - 1,21 MIN  
STRIP LENGTH : 6,0

**TOOLING**

CRIMPING TOOL : M22520/1-01 RADIALL 282 291  
SELECTOR POSITION : 6 FOR AWG 16  
5 FOR AWG 18  
4 FOR AWG 20

**POSITIONER :** M22520/1-02 RADIALL 282 972

INSERTION AND EXTRACTION TOOL : M81969/1-03 RADIALL 282 546

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112-9311

CREATION				
PEN: M970106323A				
NOM: COUTHON				
DATE: 01 MARCH 2002				
APPR.:	Issue	Revisions	Name	Approved