


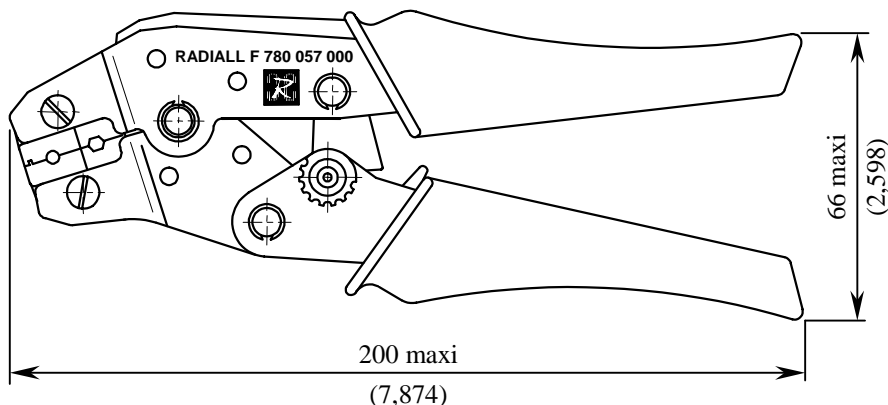

Title : CRIMPING TOOL

Series
TOOLIssue
Jul 04 2003Page
1/1Dimensions : mm / (inches)**GENERAL**

CRIMP SIZE	hexagon : LC plug 3.40mm / Luxcis contact 2,54mm
MECHANICAL ENDURANCE	10 000 matings
MASS	360g
ARMS COLOR	Green
TEMPERATURE	-15 to +40°C

CHARACTERISTICS

Used for LC and Luxcis crimping ferrule.

FUNCTIONING

1. The setting off : thanks to its releasing system, the crimping tool does not open before the crimp is completed. This system ensure a constant crimp quality.
2. The releasing : the crimping tool blocking system can be opened if it is necessary with a screwdriver. Insert the screwdriver in the hook mentioned by an arrow and pull it in direction of the other arm. This will automatically free the blocking system of the crimping tool.

INSTRUCTION OF USE

use one hand to actionate the crimping tool, and the other one to adjust and maintain the plug, the cable or the ferrule in the right position.

1. Insert the ferrule between the jaws
2. lightly close the jaws to maintain the ferrule
3. position the cable and the ferrule
4. and crimp until the jaws open

CREATION					RADIALL®	
N°:					101, rue P. Hoffmann	
EPF : 0001-2					93116 ROSNY/BOIS	
Name : S.M.	07/04/03	Crimp size changed for Luxcis contact	A.M.	G.M.	FRANCE	
Date : 06 28 01	02-06-02	Crimp size modification	SM	PB	Tel : (33) 0149353535	
Appr : P.B.	Issue	Revisions	Name	Appr.	Fax : (33) 0148546363	