
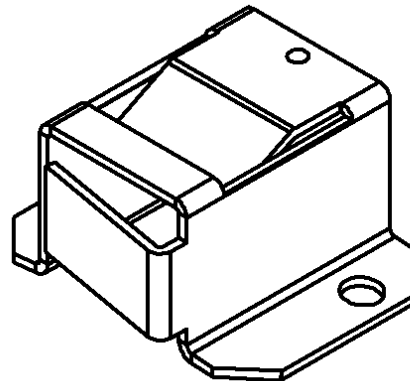
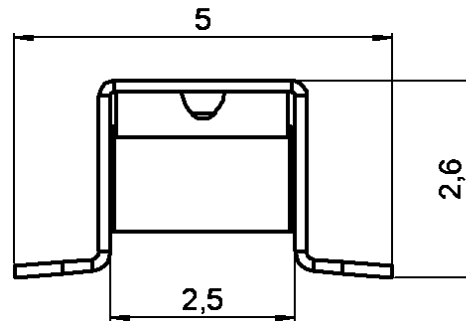

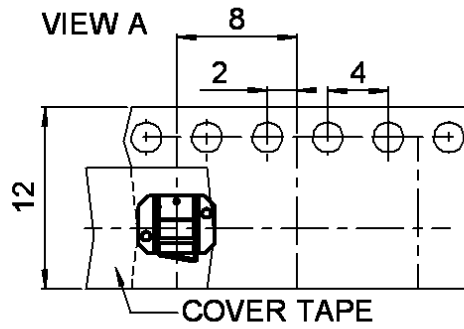



**RIGHT ANGLE H2.6 RECEPTACLE SMT TYPE**

**R107.103.030**

**REEL 3300**

Series : UMP

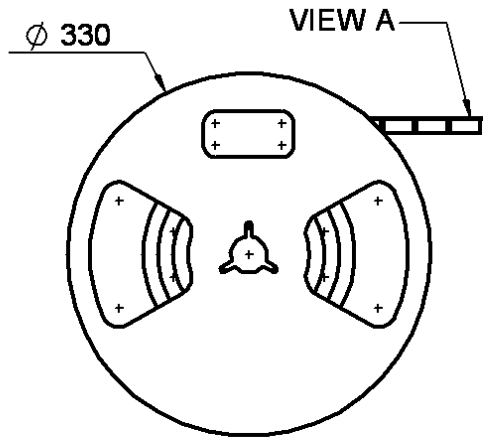

  
SCALE: 1/1

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	-	-
CENTER CONTACT	-	-
OUTER CONTACT	<b>BERYLLIUM COPPER</b>	<b>GOLD 0.2 OVER NICKEL 2</b>
INSULATOR	-	-
GASKET	-	-
OTHERS PARTS	-	-
-	-	-
-	-	-

Issue : 0417 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



**RIGHT ANGLE H2.6 RECEPTACLE SMT TYPE**

**R107.103.030**

**REEL 3300**

Series : UMP

**PACKAGING**

**SPECIFICATION**

Standard	Unit	Other
<b>3300</b>	-	<b>Contact us</b>

**ELECTRICAL CHARACTERISTICS**

Impedance		<b>50</b> Ω
Frequency		<b>0-6</b> GHz
VSWR	<b>1.05</b> +	<b>0.030</b> x F(GHz) Maxi
Insertion loss		<b>NA</b> √F(GHz) dB Maxi
RF leakage	- (	<b>NA</b> - F(GHz)) dB Maxi
Voltage rating		<b>100</b> Veff Maxi
Dielectric withstanding voltage		<b>350</b> Veff mini
Insulation resistance		<b>1000</b> MΩ mini

**ENVIRONMENTAL**

Operating temperature	<b>-40/+125</b> ° C
Hermetic seal	<b>NA</b> Atm.cm <sup>3</sup> /s
Panel leakage	<b>NA</b>

**OTHERS CHARACTERISTICS**

Assembly instruction **NA**

Others :

**MECHANICAL CHARACTERISTICS**

Center contact retention	
Axial force – Mating end	- N mini
Axial force – Opposite end	- N mini
Torque	- N.cm mini
Recommended torque	
Mating	- N.cm
Panel nut	- N.cm
Mating life	<b>100</b> Cycles mini
Weight	<b>0.049</b> g

Issue : 0417 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



**RIGHT ANGLE H2.6 RECEPTACLE SMT TYPE**

**R107.103.030**

**REEL 3300**


Series : UMP

**SOLDER PROCEDURE OF UMP RECEPTACLE  
IN INDUSTRIAL ENVIRONMENT**

1. Deposit solder paste ‘Sn Ag4 Cu0.5’ on mounting zone by screen printing application. We recommend a low residue flux.  
We advise a thickness of 150 micromm ( 5.850 microinch ). Verify that the edges of the zone are clean.
2. Placement of the receptacle on the mounting zone with an automatic machine of ‘pick and place’ type.  
A video camera is recommended for positioning of the component.  
Adhesive agents must not be used on the receptacle.
3. This process of soldering has been tested with convection oven.  
Below please find, the typical profile to use.
4. The cleaning of printed circuit boards is not obliged.
5. Verification of solder joints and position of the component by visual inspection.

**NOTE : THE UMP RECEPTACLE AND THE UMP PLUG MUST NOT BE MATED BEFORE COMPLETION OF THIS PROCEDURE.**

**TEMPERATURE PROFILE**

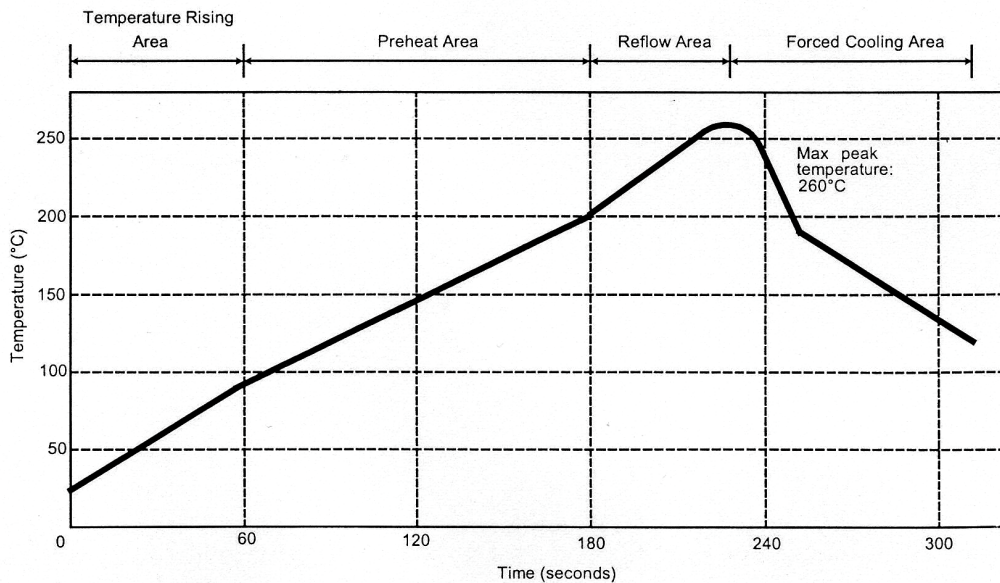

Parameter	Value	Unit
Temperature rising Area	1 - 4	°C/sec
Max Peak Temperature	260	°C
Max dwell time @260°C	10	sec
Min dwell time @235°C	20	sec
Max dwell time @235°C	60	sec
Temperature drop in cooling Area	-1 to -4	°C/sec
Max dwell time above 100°C	420	sec

**Issue : 0417 B**

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



**RIGHT ANGLE H2.6 RECEPTACLE SMT TYPE**

**R107.103.030**

**REEL 3300**


Series : UMP




# UMP SERIES INFORMATION

## PCB

### COPLANAR LINE

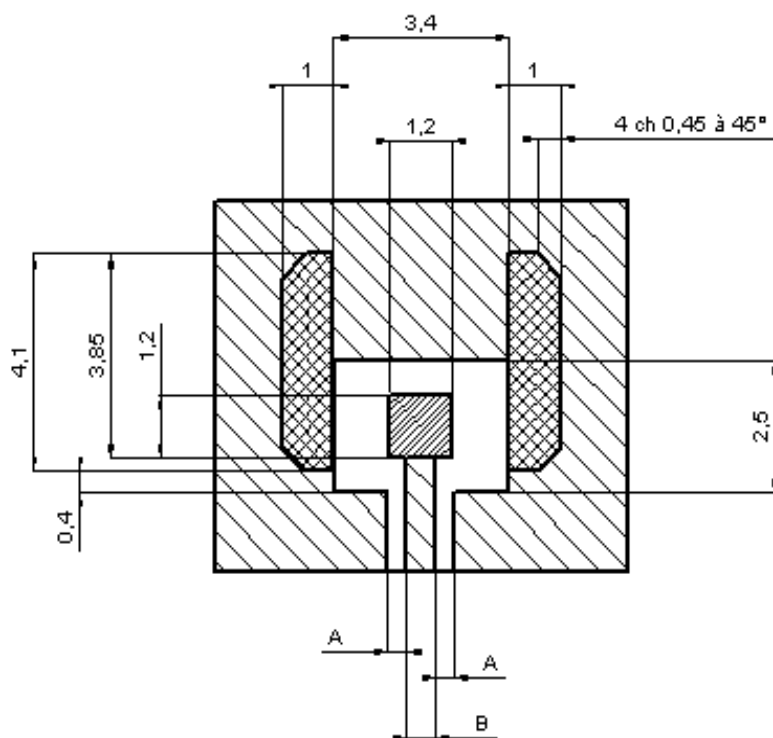Ground and signal are on the same side  
The material of PCB is glass is glass-epoxy Composite.



-  Gold over nickel for solder paste
-  Gold over nickel contact area free of any surface contaminant
-  Ground + varnish

**APPLICATION 75Ω**

**WITH B = 0,55mm**

PCB thickness (mm)	Coplanar ligne A (mm)
0,8	0,57
1,0	0,45
1,2	0,41
1,6	0,37

**APPLICACION 50Ω**

**WITH B = 1,2mm**

PCB thickness (mm)	Coplanar ligne A (mm)
0,8	0,183
1,0	0,190
1,2	0,195
1,6	0,20

**Issue : 0417 B**

In the effort to improve our products, we reserve the right to make changes judged to be necessary.







RIGHT ANGLE H2.6 RECEPTACLE SMT TYPE

**R107.103.030**

REEL 3300

Series : UMP

# UMP SERIES INFORMATION

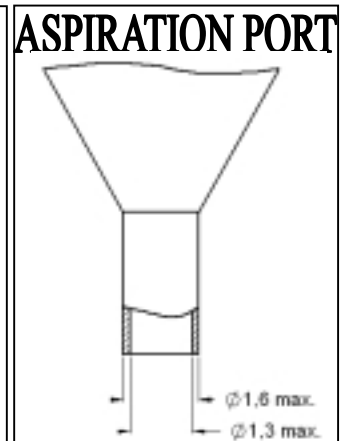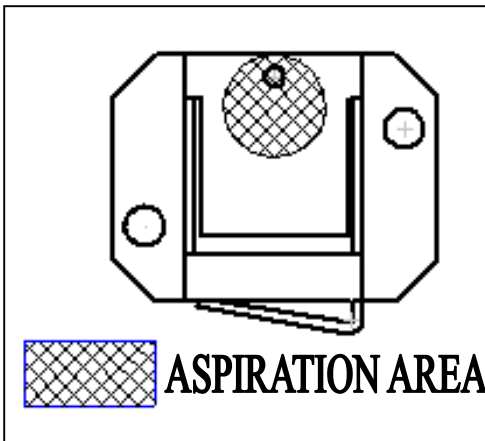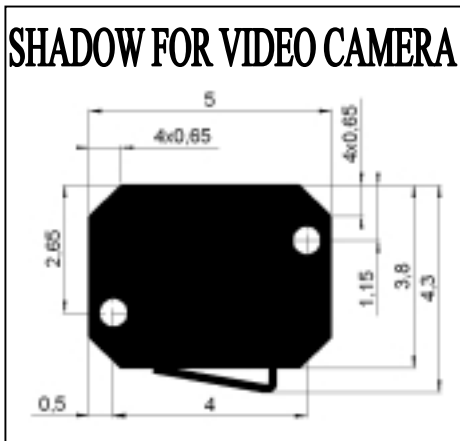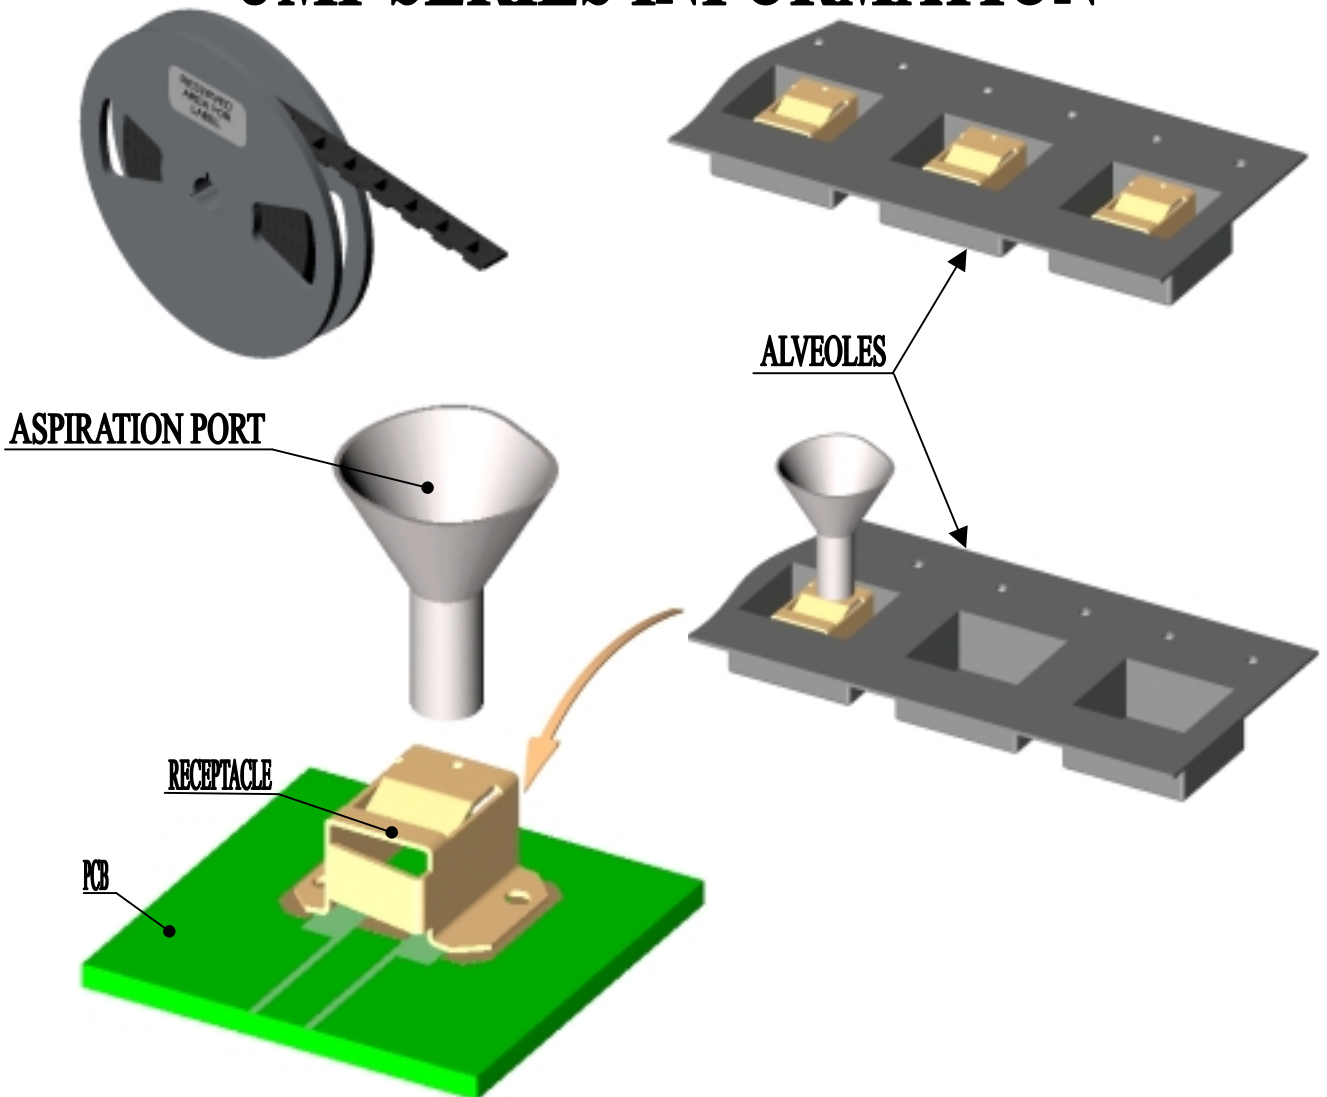

Issue : 0417 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




RIGHT ANGLE H2.6 RECEPTACLE SMT TYPE

**R107.103.030**

REEL 3300

Series : UMP

# UMP CONNECTING NOTE

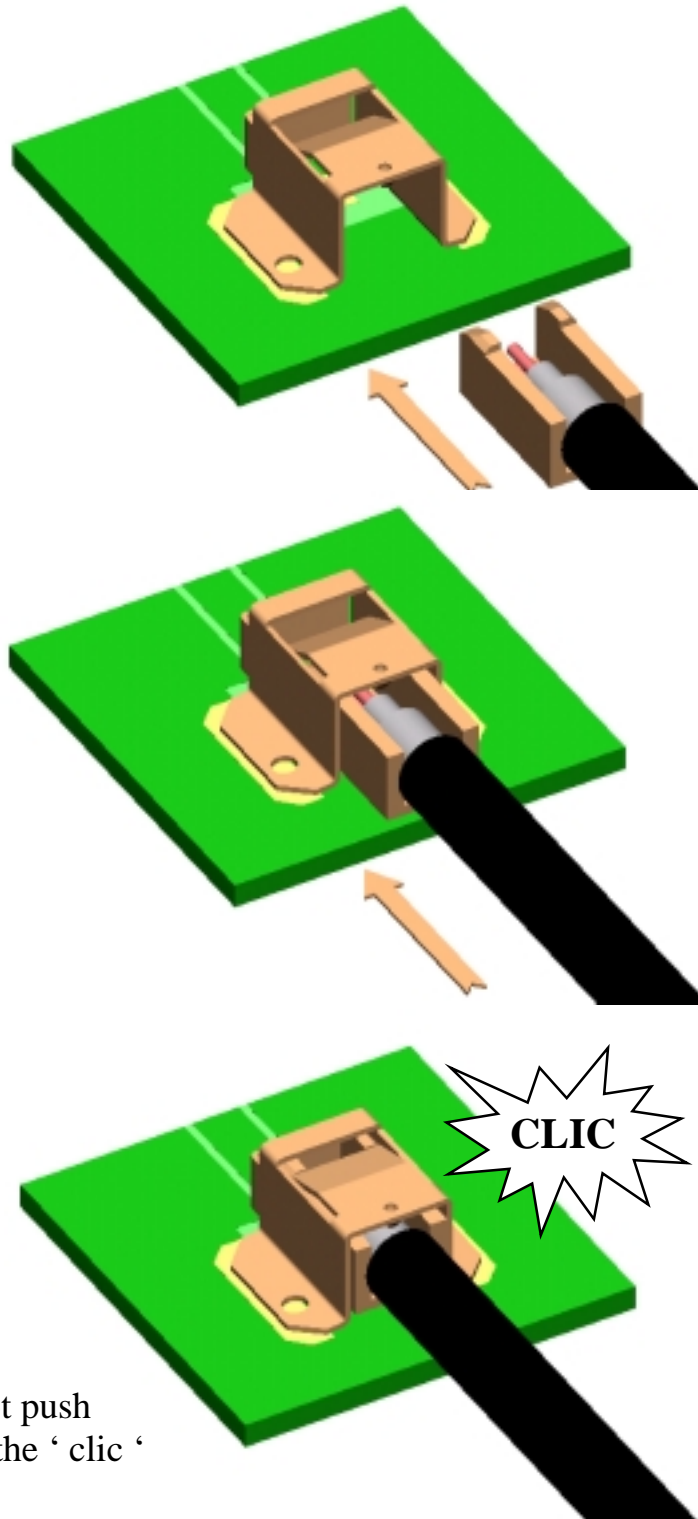**Issue :** 0417 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


RIGHT ANGLE H2.6 RECEPTACLE SMT TYPE

**R107.103.030**

REEL 3300

Series : UMP

# UMP CONNECTING NOTE

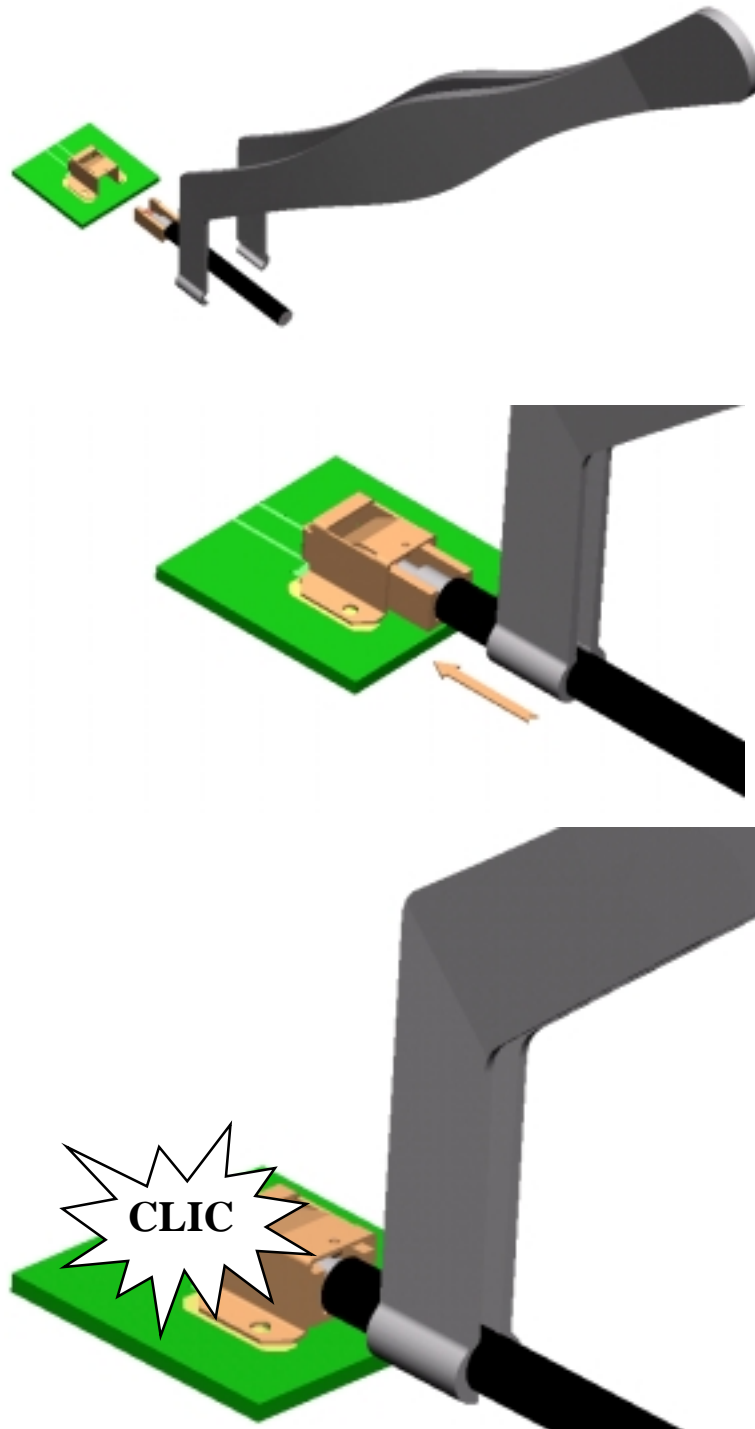

Do not push  
Over the 'CLIC'

Issue : 0417 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.











RIGHT ANGLE H2.6 RECEPTACLE SMT TYPE

**R107.103.030**

REEL 3300

Series : UMP

# UMP DISCONNECTING NOTE

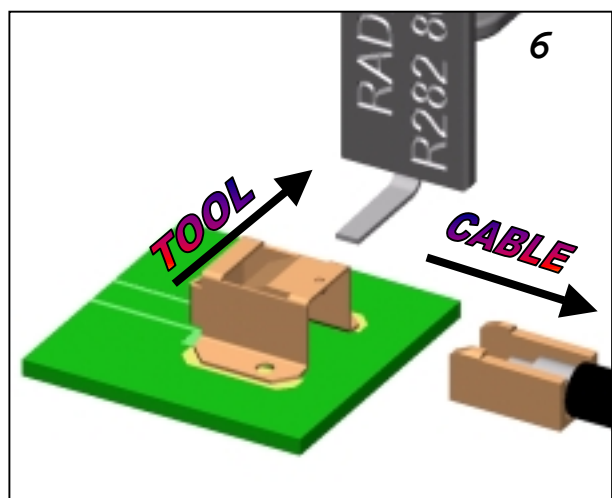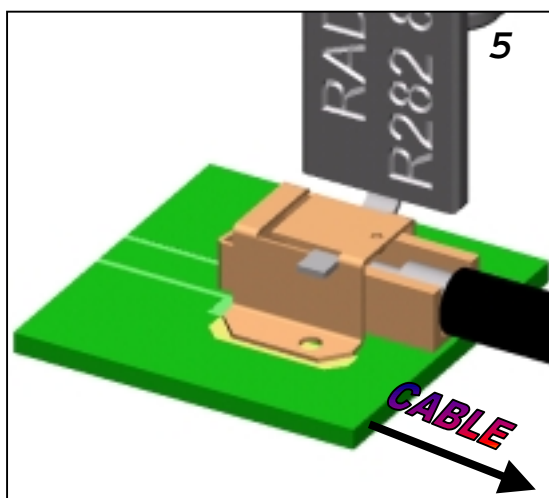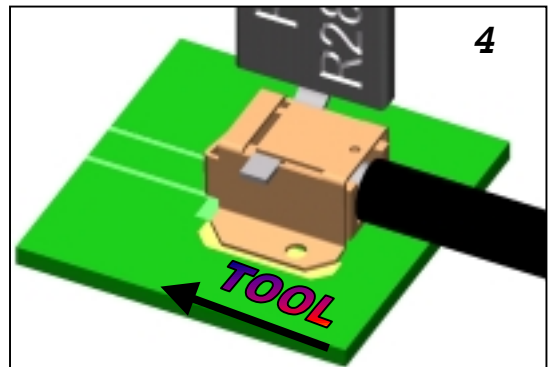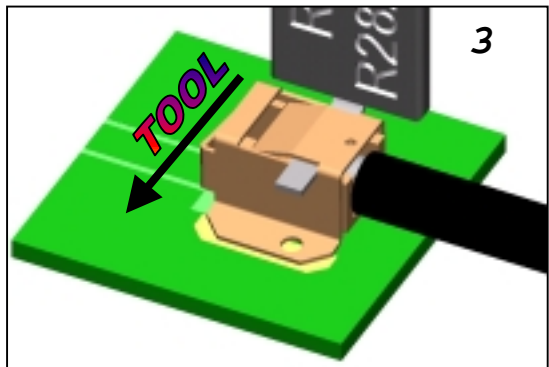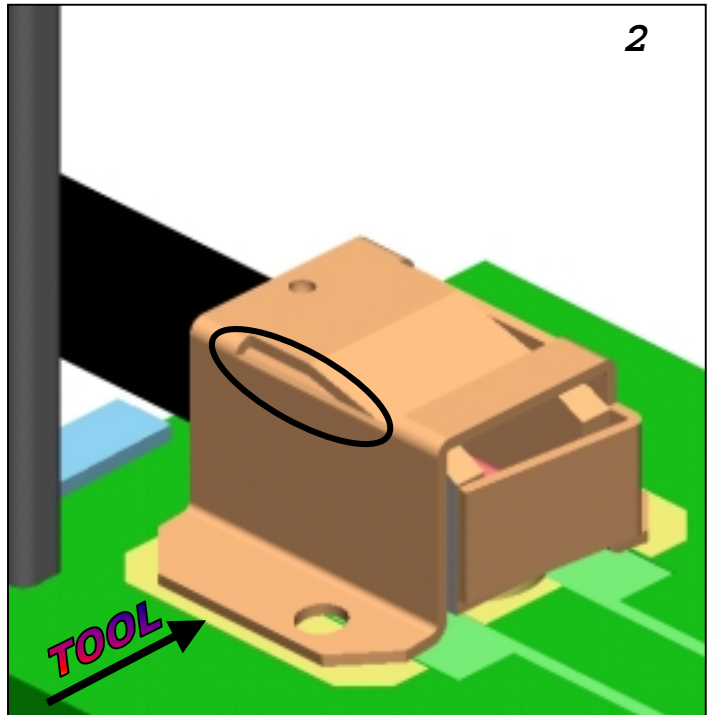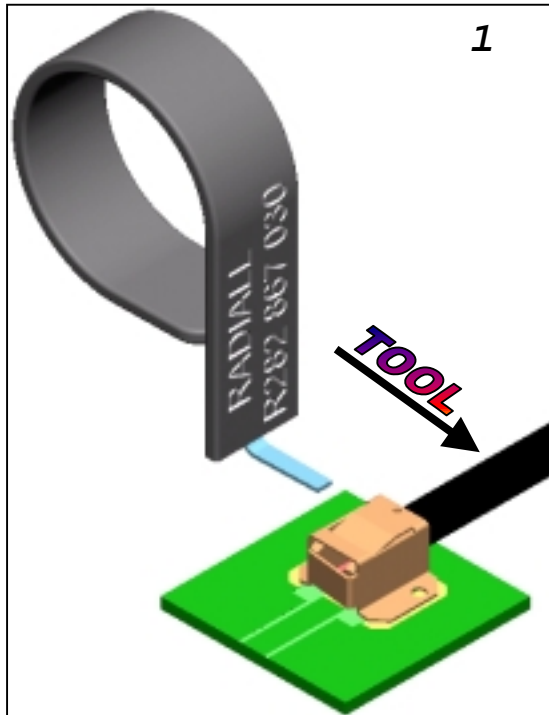

Issue : 0417 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

