



**2 HOLES FLANGE JACK RECEPTACLE
WITH CYLINDRICAL CONTACT**

R128.464.241
SERIES BMA

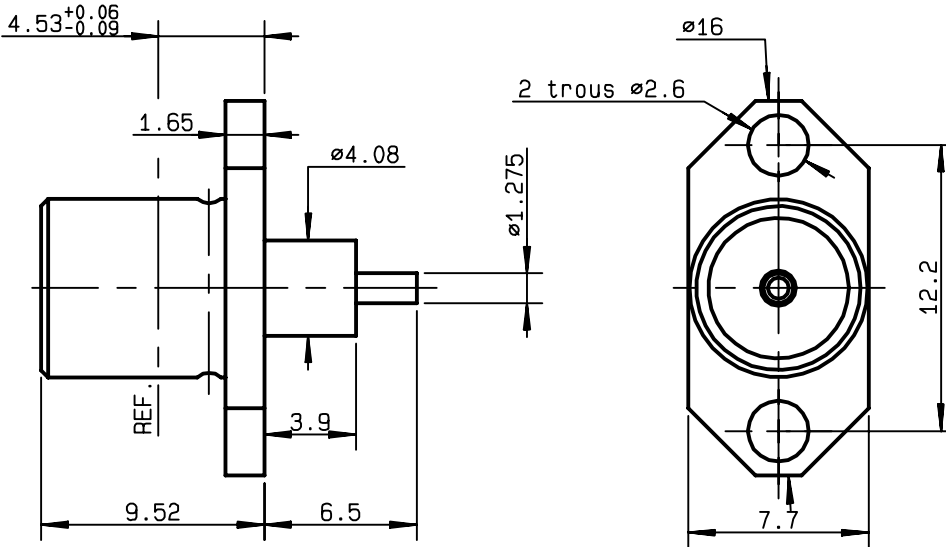

	MM		INCH	
	maxi	mini	maxi	mini
A	4.2	4.1	0.165	0.16
B	2.65	2.6	0.104	0.102
C	12.25	12.15	0.482	0.478

NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-22	GHz
TEMPERATURE RATING	-65/+125	$^{\circ}\text{C}$
V.S.W.R	1.1 + .01	$\times F(\text{GHz})\text{Maxi}$
RF INSERTION LOSS	0.07	$\sqrt{F}(\text{GHz}) \text{ dB Maxi}$
VOLTAGE RATING	500	$V_{\text{eff}} \text{ Maxi}$
DIELECTRIC WITHSTANDING VOLTAGE	1500	$V_{\text{eff}} \text{ Mini}$
INSULATION RESISTANCE	5000	$M\Omega \text{ Mini}$
HERMETIC SEAL	NA	$\text{Atm.cm}^3/\text{s}$
LEAKAGE (pressurized only)	NA	
MECHANICAL DURABILITY	1000	Cycles
WEIGHT	2.65	gr
SPECIFICATION		

CABLES :

OTHERS CHARACTERISTICS

CABLE RETENTION	NA	N Mini
CENTER CONTACT RETENTION		
Axial force - mating end	27	N Mini
Axial force - opposite end	27	N Mini
Torque	NA	cm.N Mini
RECOMMENDED TORQUES		
Mating	NA	cm.N
Panel nut	NA	cm.N
Clamp nut	NA	cm.N

CONNECTOR PARTS	MATERIALS	FINISH	(all values are given in micrometers)
BODY	STAINLESS STEEL	PASSIVATED .	
OUTER CONTACT	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2	
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2	
INSULATOR	PTFE	-	
GASKET		-	
OTHERS PIECES	STAINLESS STEEL	PASSIVATED .	

ISSUE	CREATION DATE	FILE PART-NUMBER
9926B00	29/11/1996	95-0019-202



RADIALL[®]

Connect to the future

The information given here is subject to change without notice.
Design changes may be in order to improve the product .

FANJAT