
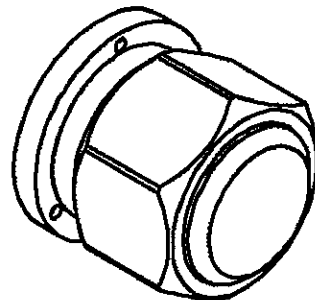




**MALE SHORT CIRCUIT CAP**

**R143.850.700**

Series : TNC

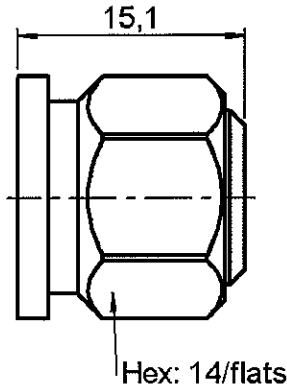

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
<b>BODY</b>	STAINLESS STEEL	PASSIVATED .
<b>CENTER CONTACT</b>	BRASS	GOLD 2.5 OVER NICKEL 2
<b>OUTER CONTACT</b>	-	-
<b>INSULATOR</b>	-	-
<b>GASKET</b>	SILICONE RUBBER	-
<b>OTHERS PARTS</b>	STAINLESS STEEL	PASSIVATED .
-	-	-
-	-	-

Issue : 0511 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



**MALE SHORT CIRCUIT CAP**

**R143.850.700**

Series : TNC

**PACKAGING**

**SPECIFICATION**

Standard	Unit	Other
1		Contact us

**ELECTRICAL CHARACTERISTICS**

**ENVIRONMENTAL**

Impedance		NA	$\Omega$
Frequency		NA	GHz
VSWR	NA +	0.000	x F(GHz) Maxi
Insertion loss		NA	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	-(	NA	- F(GHz)) dB Maxi
Voltage rating		NA	Veff Maxi
Dielectric withstanding voltage		NA	Veff mini
Insulation resistance		NA	M $\Omega$ mini

Operating temperature	-65/+165	$^{\circ}$ C
Hermetic seal	NA	Atm.cm <sup>3</sup> /s
Panel leakage	NA	

**OTHERS CHARACTERISTICS**

Assembly instruction NA

Others :

**MECHANICAL CHARACTERISTICS**

Center contact retention			
Axial force – Mating end	NA	N	mini
Axial force – Opposite end	NA	N	mini
Torque	NA	N.cm	mini
Recommended torque			
Mating	NA	N.cm	
Panel nut	NA	N.cm	
Mating life	500	Cycles	mini
Weight	0.000	g	

Issue : 0511 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

