


MALE - MALE ADAPTOR
FREE CONTACT , LINE AIR - 7 mm .

SERIES: N 18 GHz 1 / 1

DEP90.R161.500

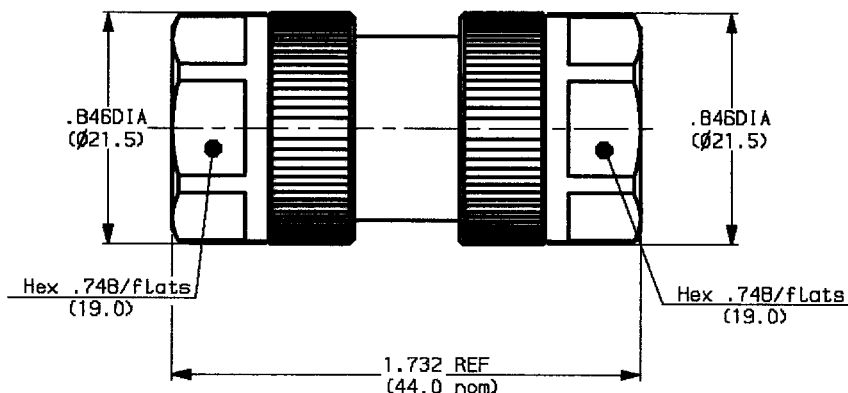

WEIGHT oz (g)

CHARACTERISTICS

NOMINAL IMPEDANCE	50 Ω
FREQUENCY RANGE	0-18 GHz
TEMPERATURE RATING	-65/+165 °C
VSWR	1.05 + 0.005 f (GHz)
RF INSERTION LOSS	0.1 \sqrt{f} dB Maxi
VOLTAGE RATING	1000 Vrms Maxi
DIELECTRIC WITHSTANDING VOLTAGE	2500 Vrms mini
INSULATION RESISTANCE	5000 Mo mini
HERMETIC SEAL	NA cc/s Atm.cm3/s
LEAKAGE (pressurized only)	NA psi MPa
-	-
-	-

STANDARDISATION	MIL C 39012
	CECC 22000
	IEC 169-16
CABLE RETENTION	NA Lb mini N
CENTER CONTACT RETENTION	
Axial force - mating end	NA Lb mini N
Axial force - opposite end	NA Lb mini N
Torque (Min)	NA Inch.oz cm.N
RECOMMENDED TORQUES	
Mating	NA Inch.Lb cm.N
Panel nut	NA Inch.Lb cm.N
Clamp nut	NA Inch.Lb cm.N

CONSTRUCTION

CONNECTOR PARTS	MATERIALS	FINISH
BODY	STAINLESS STEEL	PASSIVATED
OUTER CONTACT	STAINLESS STEEL	PASSIVATED
CENTER CONTACT	BRASS	GOLD
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

ISSUE	REVISION No	DESCRIPTION	BY	DATE
.
.
.
.

Initiated on 09-JUL-90

The information given here is subject to change without notice. Design changes may be in order to improve the product.



Superseded on -----