


**BULKEAD WATER PROOF F-F BETWEEN SERIES
ADAPTOR CERAMIC INSULATOR**

R176.754.150
SERIES HN

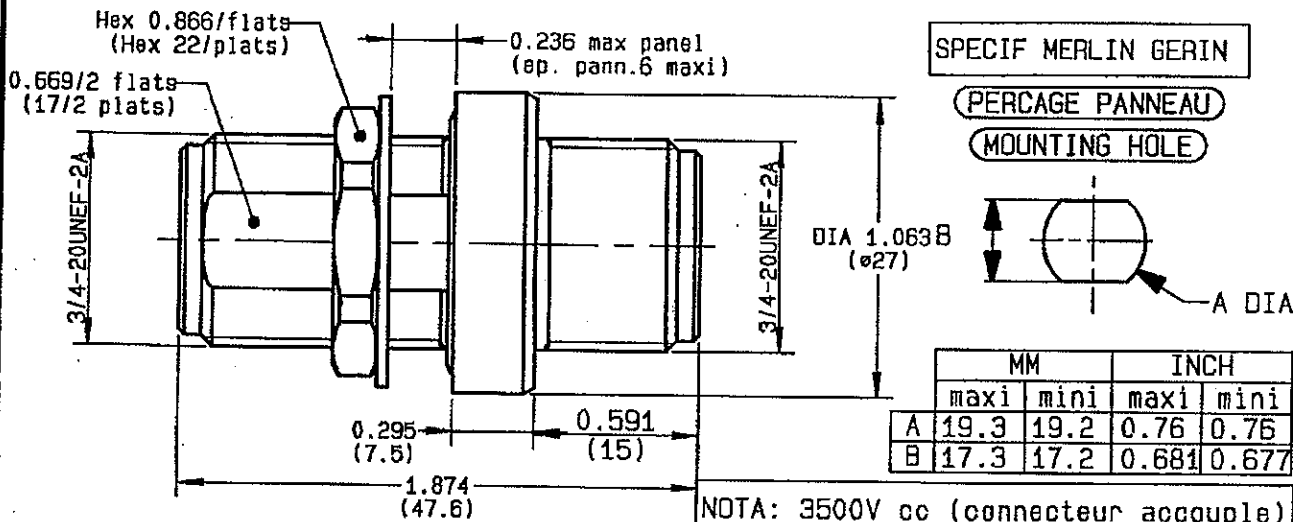

NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-3	GHz
TEMPERATURE RATING	-55/+155	°C
V.S.W.R	NA +	x F(GHz)Maxi
RF INSERTION LOSS	NA	√F(GHz) dB Maxi
VOLTAGE RATING	1500cc	Veff Maxi
DIELECTRIC WITHSTANDING VOLTAGE	NOTA	Veff Mini
INSULATION RESISTANCE	*	M ΩMini
HERMETIC SEAL	NA	Atm.cm ³ /s
LEAKAGE (pressurized only)	NA	MPa
MECHANICAL DURABILITY		Cycles
WEIGHT		gr
SPECIFICATION	1 410 015 G	

OTHERS CHARACTERISTICS		*10 ⁷ M Ω sous 800V cc	
CABLES :		NA	N Mini
CABLE RETENTION		NA	N Mini
CENTER CONTACT RETENTION		NA	N Mini
Axial force - mating end		NA	N Mini
Axial force - opposite end		NA	N Mini
Torque		NA	cm.N Mini
RECOMMENDED TORQUES			
Mating		NA	cm.N
Panel nut		NA	cm.N
Clamp nut		NA	cm.N

CONNECTOR PARTS	MATERIALS	FINISH	(all values are given in micrometers)
BODY	BRASS	NICKEL .	
OUTER CONTACT	BRASS	NICKEL .	
CENTER CONTACT	BERYLLIUM COPPER	GOLD .	
INSULATOR	CERAMIC	-	
GASKET	SILICONE RUBBER	-	
OTHERS PIECES			

ISSUE	CREATION DATE	FILE PART-NUMBER	
0606 E1	14-DEC-77		

The information given here is subject to change without notice. Design changes may be in order to improve the product.

Connect to the future