


BNC FEMALE - TNC MALE PUSH-ON STRAIGHT ADAPTER

R191.405.500
SERIES ADAPT

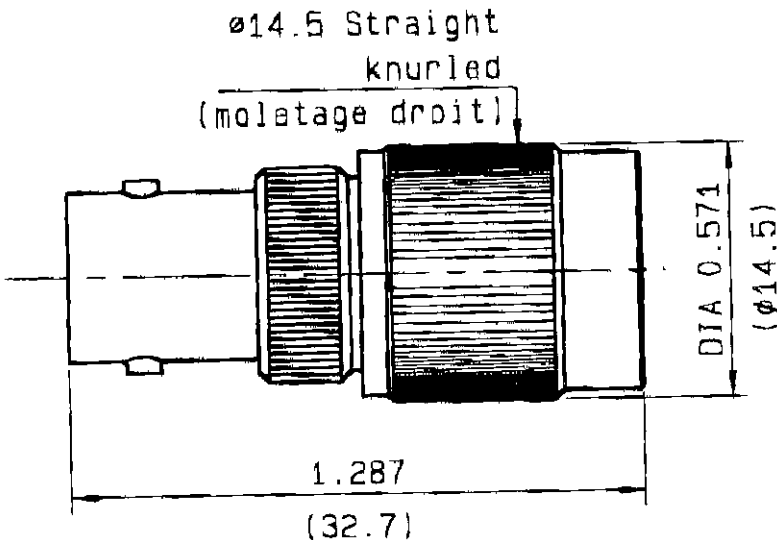

NOMINAL IMPEDANCE	50 Ω
FREQUENCY RANGE	0-4 GHz
TEMPERATURE RATING	-65/+165 °C
V.S.W.R	1.08 + .025 x F(GHz)Max1
RF INSERTION LOSS	0.04 \sqrt{F} (GHz) dB Max1
VOLTAGE RATING	500 Veff Max1
DIELECTRIC WITHSTANDING VOLTAGE	1500 Veff Min1
INSULATION RESISTANCE	5000 M Ω Min1
HERMETIC SEAL	NA Atm.cm ³ /s
LEAKAGE (pressurized only)	NA
MECHANICAL DURABILITY	500 Cycles
WEIGHT	0 Oz
SPECIFICATION	

CABLES :	
OTHERS CHARACTERISTICS	
CABLE RETENTION	0 lb Min1
CENTER CONTACT RETENTION	
Axial force - mating end	6.06 lb Min1
Axial force - opposite end	6.06 lb Min1
Torque	NA Inch.oz
RECOMMENDED TORQUES	
Mating	NA Inch.lb
Panel nut	NA Inch.lb
Clamp nut	NA Inch.lb

CONNECTOR PARTS	MATERIALS	FINISH
BODY	BRASS	NICKEL 80
OUTER CONTACT	BRASS	NICKEL 80
CENTER CONTACT	BERYLLIUM COPPER	GOLD 20 OVER NICKEL 80
INSULATOR	PTFE	-
GASKET		-
OTHERS PIECES	BRASS	NICKEL 80

(all values are given in micropinch)

ISSUE	CREATION DATE	FILE PART-NUMBER
0205A00	01-MAR-95	95-0400-053



MASTRIAND

The information given here is subject to change without notice. Design changes may be in order to improve the product.

Connect to the future