

/usr/dt.baffert/MCX/s.AFTPENB91200111



TECHNICAL DATA

R 191 471 000


BNC-M / MCX-M ADAPTER

Issue : 8904

Page

SERIES: ADAPTER

01 / 01

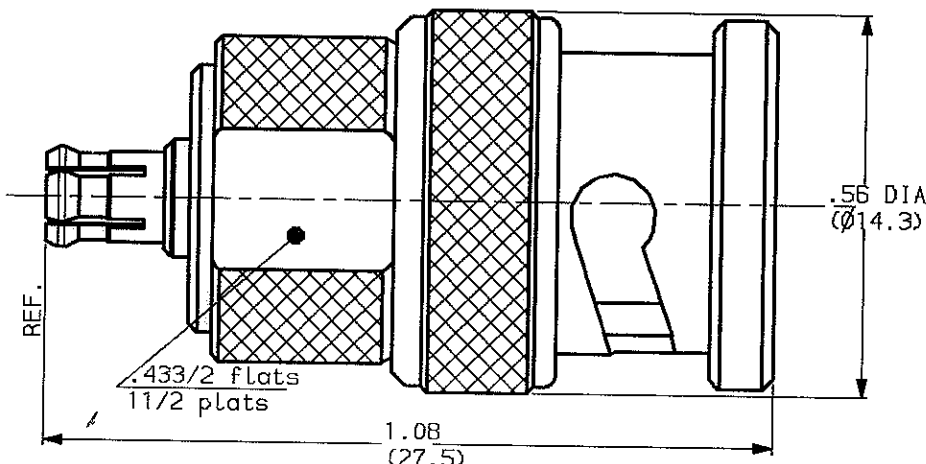

WEIGHT 0 oz (..... g)

Cable : NA

CHARACTERISTICS

NOMINAL IMPEDANCE	50 Ω	STANDARDISATION	-
FREQUENCY RANGE	0-3 GHz		-
TEMPERATURE RATING	-55/+155 °C		-
VSWR	TBD Max		-
RF INSERTION LOSS	NA dB Max	CABLE RETENTION	0 Lb Max NA N Max
VOLTAGE RATING	335 Vrms	CENTER CONTACT RETENTION	
DIELECTRIC WITHSTANDING VOLTAGE	750 Vrms	Axial force - mating end	6.07 Lb Max 27 N Max
INSULATION RESISTANCE	1000 Mo	Axial force - opposite end	6.07 Lb Max 27 N Max
HERMETIC SEAL	NA cc/s cm ³ /s	Torque (Max)	0 Inch. oz NA cm.N
LEAKAGE (pressurized only)	0 psi NA kg/cm ²	MATING TORQUE RECOMMENDED	NA Inch. Lb NA cm.N
-	-	-	-
-	-	-	-

CONSTRUCTION

CONNECTOR PARTS	MATERIALS	FINISH
Body	Brass	Nickel
Outer contact	Beryllium copper	Nickel
Center contact	Brass	Gold over nickel
Insulators	PTFE	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

ISSUE	REVISION No	DESCRIPTION	BY	DATE
.
.
.
.

Initiated on 26-04-89 The information given here is subject to change without notice. Design changes may be in order to improve the product.



Superseded on -----