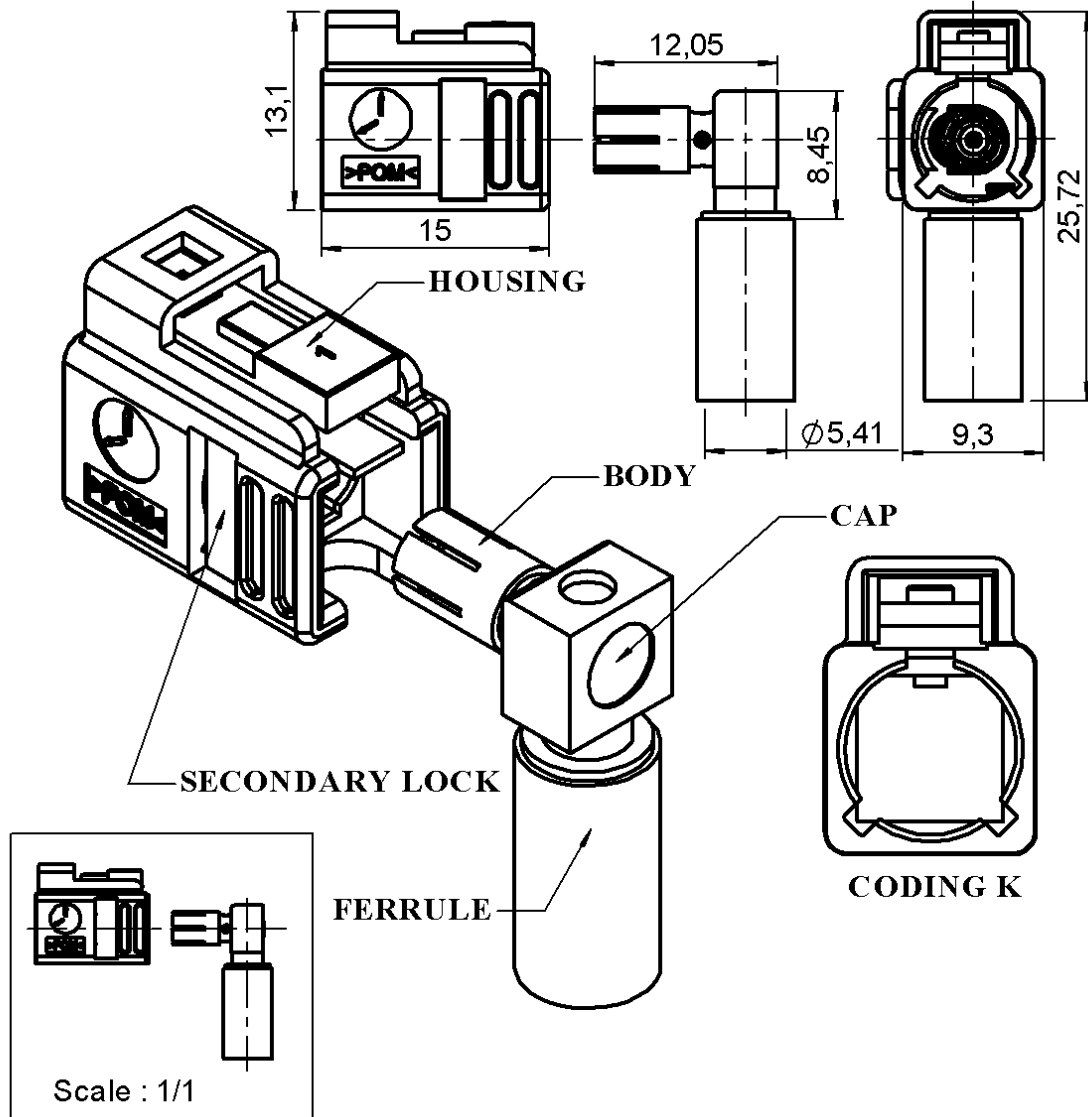


R/A COAX PLUG+HOUSING

R197.120.K01

CABLE 5/50

Series : SMB
CARLOCK



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)	
BODY	BRASS	NICKEL .	
CENTER CONTACT	BRONZE	GOLD OVER NICKEL	
OUTER CONTACT	BRONZE	NICKEL .	
INSULATOR	PTFE	NICKEL .	
GASKET	-	UL CLASSIFICATION	
OTHERS PARTS	BRONZE	UL 94 V-2	COLOR
HOUSING	Polyoxyméthylène (POM)	UL 94V-2	CURRY RAL 1027
Secondary Lock	Polyoxyméthylène (POM)		PURPLE RAL 4006

*According to FAKRA specifications

Issue : 0044 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



R/A COAX PLUG+HOUSING

R197.120.K01

CABLE 5/50

Series : **SMB**
CARLOCK

PACKAGING

Standard	Unit	Other
100	'W' option	Contact us

SPECIFICATION

ELECTRICAL CHARACTERISTICS

Impedance	50 Ω						
Frequency range	0-2 GHz						
	<table border="1"> <tr> <td>Frequency</td> <td>1GHz</td> <td>2GHz</td> </tr> <tr> <td>VSWR</td> <td>1.05</td> <td>1.100</td> </tr> </table>	Frequency	1GHz	2GHz	VSWR	1.05	1.100
Frequency	1GHz	2GHz					
VSWR	1.05	1.100					
Insertion loss	0.25 √F(GHz) dB Maxi						
RF leakage	- (- F(GHz)) dB mini						
Voltage rating	335 Veff Maxi						
Dielectric withstanding voltage	1000 Veff mini						
Insulation resistance	1000 MΩ mini						

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	5.00	8.00	15.0	10.0	0.00	0.00

Assembly instruction : page 4

Recommended cable(s)
RG 58

Cable retention
- pull off **180** N mini
- torque N.cm

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	10 N mini
Axial force – Opposite end	10 N mini
Torque	N.cm mini

Recommended torque	
Mating	N.cm
Panel nut	N.cm
Clamp nut	N.cm
A/F clamp nut	0.000 mm

Mating life	100 Cycles mini
Weight	3.784 g

TOOLING

Part Number	Description	Hexagon
.	.	.
R282.223.000	CRIMPING TOOL	5.41
R282.235.011	CRIMPING DIES	M22520/5-11
R282.293.000	CRIMPING TOOL	M22520/5-01

OTHERS CHARACTERISTICS

Housing Locking strength 80 N mini

ENVIRONMENTAL

Operating temperature	-40/+110 ° C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

Issue : **0044 A**

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



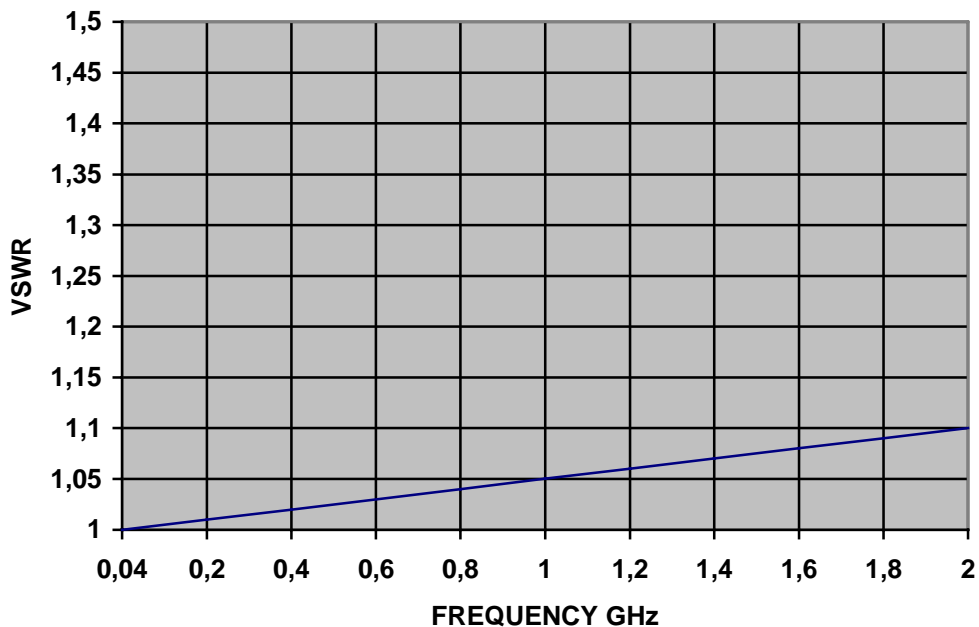
R/A COAX PLUG+HOUSING

R197.120.K01

CABLE 5/50

Series : SMB
CARLOCK

VSWR



Issue : 0044 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



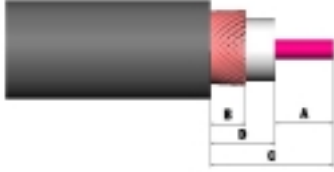
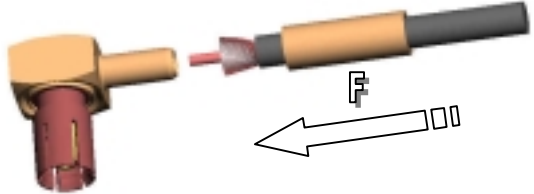
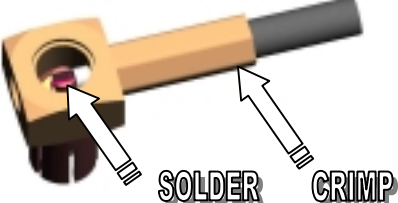

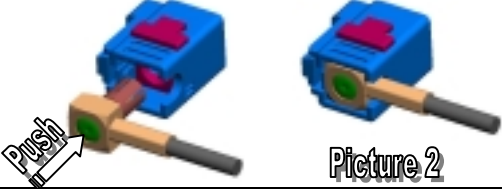

R/A COAX PLUG+HOUSING

R197.120.K01

CABLE 5/50

Series : SMB
CARLOCK

RECOMMENDED MOUNTING PROCEDURE

<p>1</p> <ul style="list-style-type: none"> • Slide onto the cable the ferrule • Strip the cable 	
<p>2</p> <ul style="list-style-type: none"> • Fan the braid • Push connector body under the braid • Slide the ferrule on the braid (in direction F) 	
<p>3</p> <ul style="list-style-type: none"> • Crimp the ferrule with crimping tool R282.223.000 (Hex:5.41) or crimping tool R282.293.000 (M22520/5-01) + dies R282.235.011 (M22520/5-11) • Solder inner conductor 	
<p>4</p> <ul style="list-style-type: none"> • Place the cap • Press cap flush or slightly below surface of body assembly 	
<p>5</p> <ul style="list-style-type: none"> • Push the coax in the housing till it snap on (according to picture 2) 	
<p>6</p> <ul style="list-style-type: none"> • To secure the coax inside the housing , push the secondary lock in final position (until it click on) 	

Issue : 0044 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

