


R/A COAX PLUG+HOUSING


R197.120._00

CABLE 2.6/50

Series : SMB
CARLOCK

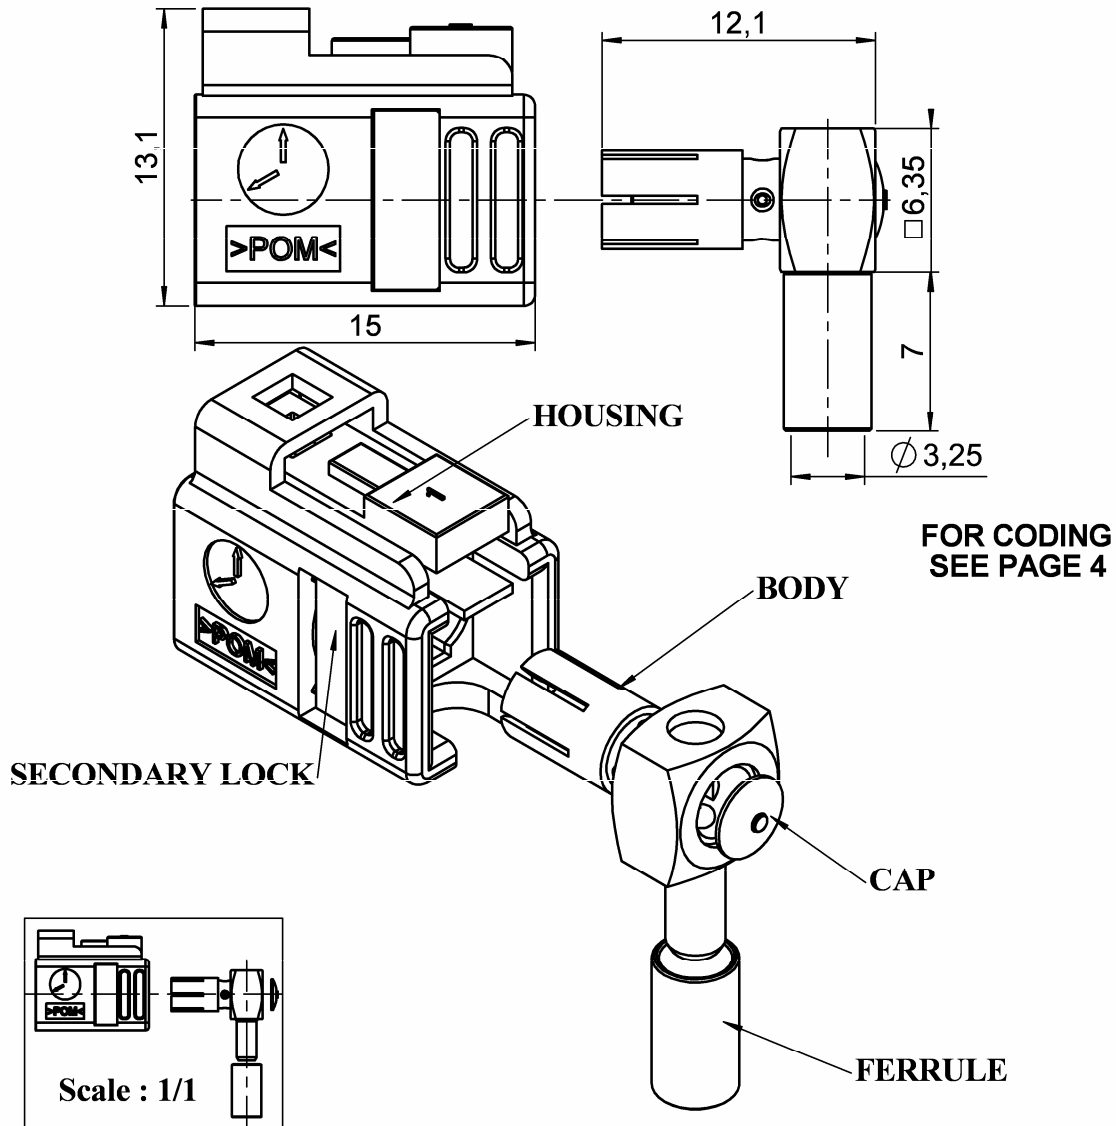

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm) / COLOR (RAL)
BODY	BRASS	NICKEL 2
CENTER CONTACT	BRONZE	GOLD 0.8 OVER NICKEL 2
OUTER CONTACT	BRONZE	NICKEL 2
INSULATOR	PTFE	
GASKET		
OTHERS PARTS	BRASS	NICKEL 2
HOUSING	Polyoxyméthylène (POM)	-
SECONDARY LOCK	Polyoxyméthylène (POM)	PURPLE RAL 4003

Issue : 0126 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



R/A COAX PLUG+HOUSING

R197.120._00

CABLE 2.6/50

Series : **SMB**
CARLOCK

PACKAGING

Standard	Unit	Other
100	'W' option	Contact us

SPECIFICATION

-

ELECTRICAL CHARACTERISTICS

Impedance		50 Ω
Frequency		0-2 GHz
VSWR	1.03 + 0.050	x F(GHz) Maxi
Insertion loss		0.25 √F(GHz) dB Maxi
RF leakage	- (- F(GHz)) dB Maxi
Voltage rating		335 Veff Maxi
Dielectric withstanding voltage		1000 Veff mini
Insulation resistance		1000 MΩ mini

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	2.00	5.00	9.00	7.00	0.00	0.00

Assembly instruction : **page 3**

Recommended cable(s)
RG 174
KX 3B
RG 188
KX 22A
RG 316

Cable retention
- pull off **110** N mini
- torque N.cm

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	10	N mini
Axial force – Opposite end	10	N mini
Torque		N.cm mini

TOOLING

Part Number	Description	Hexagon
.	.	.
R282.211.000	CRIMPING TOOL	3.25
R282.235.003	CRIMPING DIES	3.25
R282.293.000	CRIMPING TOOL	-

Recommended torque		
Mating		N.cm
Panel nut		N.cm
Clamp nut		N.cm
A/F clamp nut	0.000	mm

Mating life	100	Cycles mini
Weight	2.693	g

OTHERS CHARACTERISTICS

ENVIRONMENTAL

Operating temperature	-40/+110	° C
Hermetic seal		Atm.cm3/s
Panel leakage		

Issue : **0126 A**

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



R/A COAX PLUG+HOUSING

R197.120._00

CABLE 2.6/50

Series : SMB
CARLOCK

RECOMMENDED MOUNTING PROCEDURE

<p>1</p> <ul style="list-style-type: none"> • Slide onto the cable the ferrule • Strip the cable 	
<p>2</p> <ul style="list-style-type: none"> • Fan the braid • Push connector body under the braid • Slide the ferrule on the braid (in direction F) 	
<p>3</p> <ul style="list-style-type: none"> • Crimp the ferrule with crimping tool R282.211.000 (Hex:3.25) or crimping tool R282.293.000 (M22520/5-01) + dies R282.235.003 (M22520/5-03) • Solder inner conductor 	
<p>4</p> <ul style="list-style-type: none"> • Place the cap • Press cap flush or slightly below surface of body assembly 	
<p>5</p> <ul style="list-style-type: none"> • Push the coax in the housing till it snap on (according to picture 2) 	
<p>6</p> <ul style="list-style-type: none"> • To secure the coax inside the housing , push the secondary lock in final position (until it click on) 	

Issue : 0126 A


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

R/A COAX PLUG+HOUSING


R197.120._00

Series : SMB
CARLOCK


CABLE 2.6/50




CODING A
 COLOR BLACK
 RAL 9005




CODING B
 COLOR WHITE
 RAL 9003




CODING C
 COLOR BLUE
 RAL 5005




CODING D
 COLOR BORDEAUX
 VIOLET
 RAL 4004




CODING E
 COLOR GREEN
 RAL 6002




CODING F
 COLOR BROWN
 RAL 8011




CODING G
 COLOR GREY
 RAL7031




CODING H
 COLOR VIOLET
 RAL 4003



CODING I
 COLOR BEIGE
 RAL 1001



CODING K
 COLOR CURRY
 RAL 1027



CODING Z
 COLOR WATER BLUE
 RAL 5021

UL CLASSIFICATION
 UL 94V-2

*According to FAKRA specifications

-To obtain the complete P/N please fill in the blank "_ " with the coding letter

Issue : 0126 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

