


MALE-MALE ADAPTOR
GAP BETWEEN PCB CARDS 11.1MM - PACK. 100 **R209.703.040**
SERIES MMS

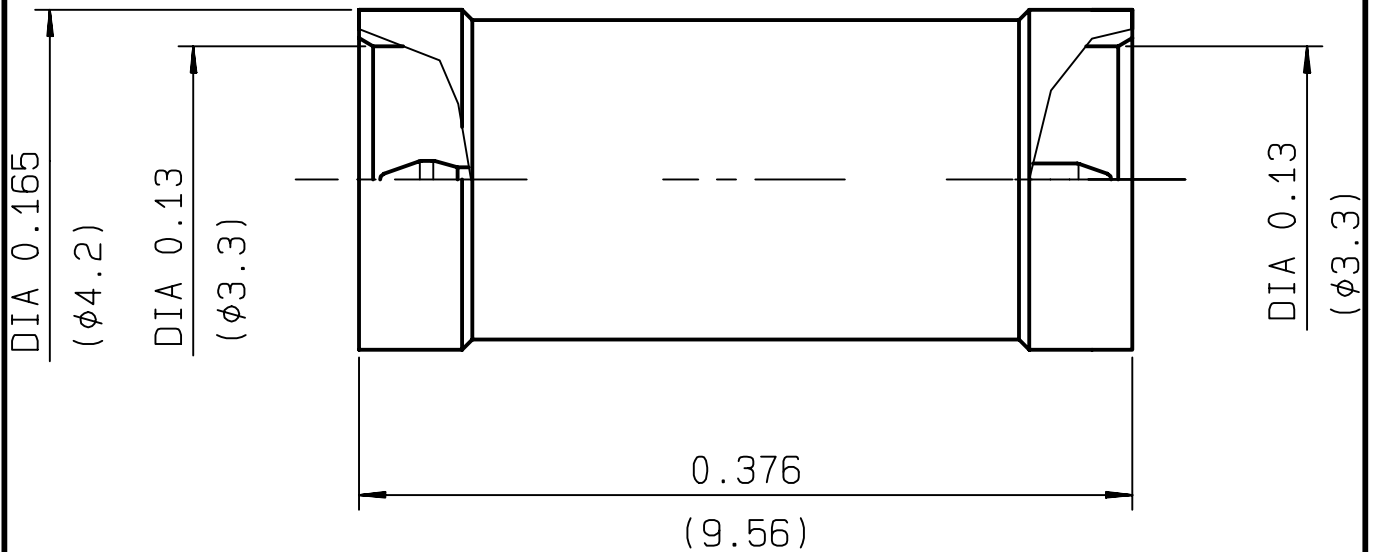

NOMINAL IMPEDANCE	50 Ω
FREQUENCY RANGE	0-6 GHz
TEMPERATURE RATING	-40/+125 °C
V.S.W.R	* + x F(GHz)Maxi
RF INSERTION LOSS	0.2 √F(GHz) dB Maxi
VOLTAGE RATING	50 Veff Maxi
DIELECTRIC WITHSTANDING VOLTAGE	250 Veff Mini
INSULATION RESISTANCE	500 MΩMini
HERMETIC SEAL	NA Atm.cm ³ /s
LEAKAGE (pressurized only)	NA
MECHANICAL DURABILITY	50 Cycles
WEIGHT	.5 gr
SPECIFICATION	

CABLES :	
OTHERS CHARACTERISTICS	*1.2 a 2 GHz
CABLE RETENTION	NA N Mini
CENTER CONTACT RETENTION	
Axial force - mating end	10 N Mini
Axial force - opposite end	10 N Mini
Torque	NA cm.N Mini
RECOMMENDED TORQUES	
Mating	NA cm.N
Panel nut	NA cm.N
Clamp nut	NA cm.N

CONNECTOR PARTS	MATERIALS	FINISH	(all values are given) in micrometers
BODY	BRASS	NICKEL 2	
OUTER CONTACT			
CENTER CONTACT	BRASS	NICKEL 2	
INSULATOR	PTFE	-	
GASKET		-	
OTHERS PIECES			

ISSUE	CREATION DATE	FILE PART-NUMBER
9916A00	08/11/1996	96-0400-540



MASTRIANO

The information given here is subject to change without notice.
 Design changes may be in order to improve the product .

Connect to the future