


LINK (10) WITH TEST PORT (RES 1K)
PACK 50

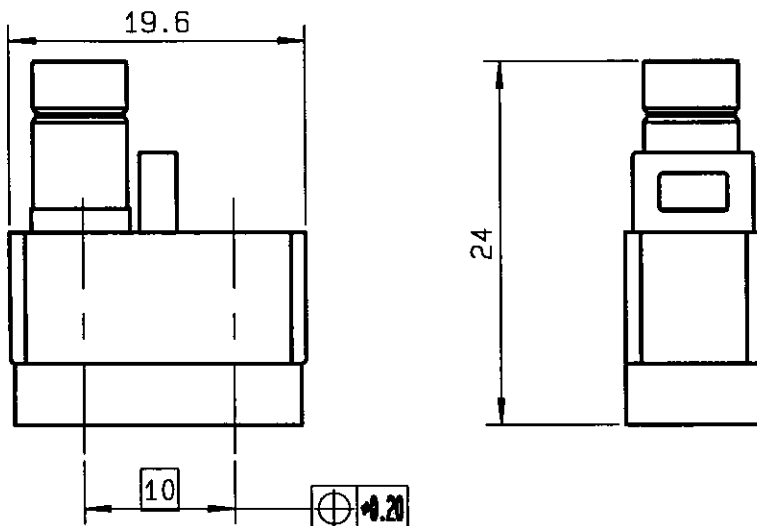

CABLES : -

CHARACTERISTICS

NOMINAL IMPEDANCE	75	Ω
FREQUENCY RANGE	0-3	GHz
TEMPERATURE RATING	-40/+100	$^{\circ}\text{C}$
VSWR	NA +	- x F(GHz)Max1
RF INSERTION LOSS	NA	$\sqrt{F(\text{GHz})}$ dB Max1
VOLTAGE RATING	500	Vrms Max
DIELECTRIC WITHSTANDING VOLTAGE	1500	Vrms min
INSULATION RESISTANCE	5000	M Ω min
HERMETIC SEAL	NA	Atm.cm3/s
LEAKAGE (pressurized only)	NA	Mpa
WEIGHT	-	gr

STANDARDISATION

STANDARDISATION	-
CABLE RETENTION	NA N min
CENTER CONTACT RETENTION	
Axial force - mating end	22 N min
Axial force - opposite end	NA N min
Torque (Min)	NA cm.N min
RECOMMENDED TORQUES	
Mating	NA cm.N
Panel nut	NA cm.N
Clamp nut	NA cm.N

CONSTRUCTION

CONNECTOR PARTS	MATERIALS	FINISH
BODY	ALUMINIUM ALLOY	GOLD
OUTER CONTACT	BERYLLIUM COPPER	GOLD
CENTER CONTACT	BERYLLIUM COPPER	GOLD
INSULATOR	PTFE	-
T/PORT	BRASS	GOLD
-	-	-
-	-	-
-	-	-
-	-	-

ISSUE	REVISION No	DESCRIPTION	BY	DATE
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

Initiated on 30.08.96

The information given here is subject to change without notice. Design changes may be in order to improve the product



Approval by GERALD U