



MALE FLANGE RECEPTACLE

Series : BNC TRX

1 / 1

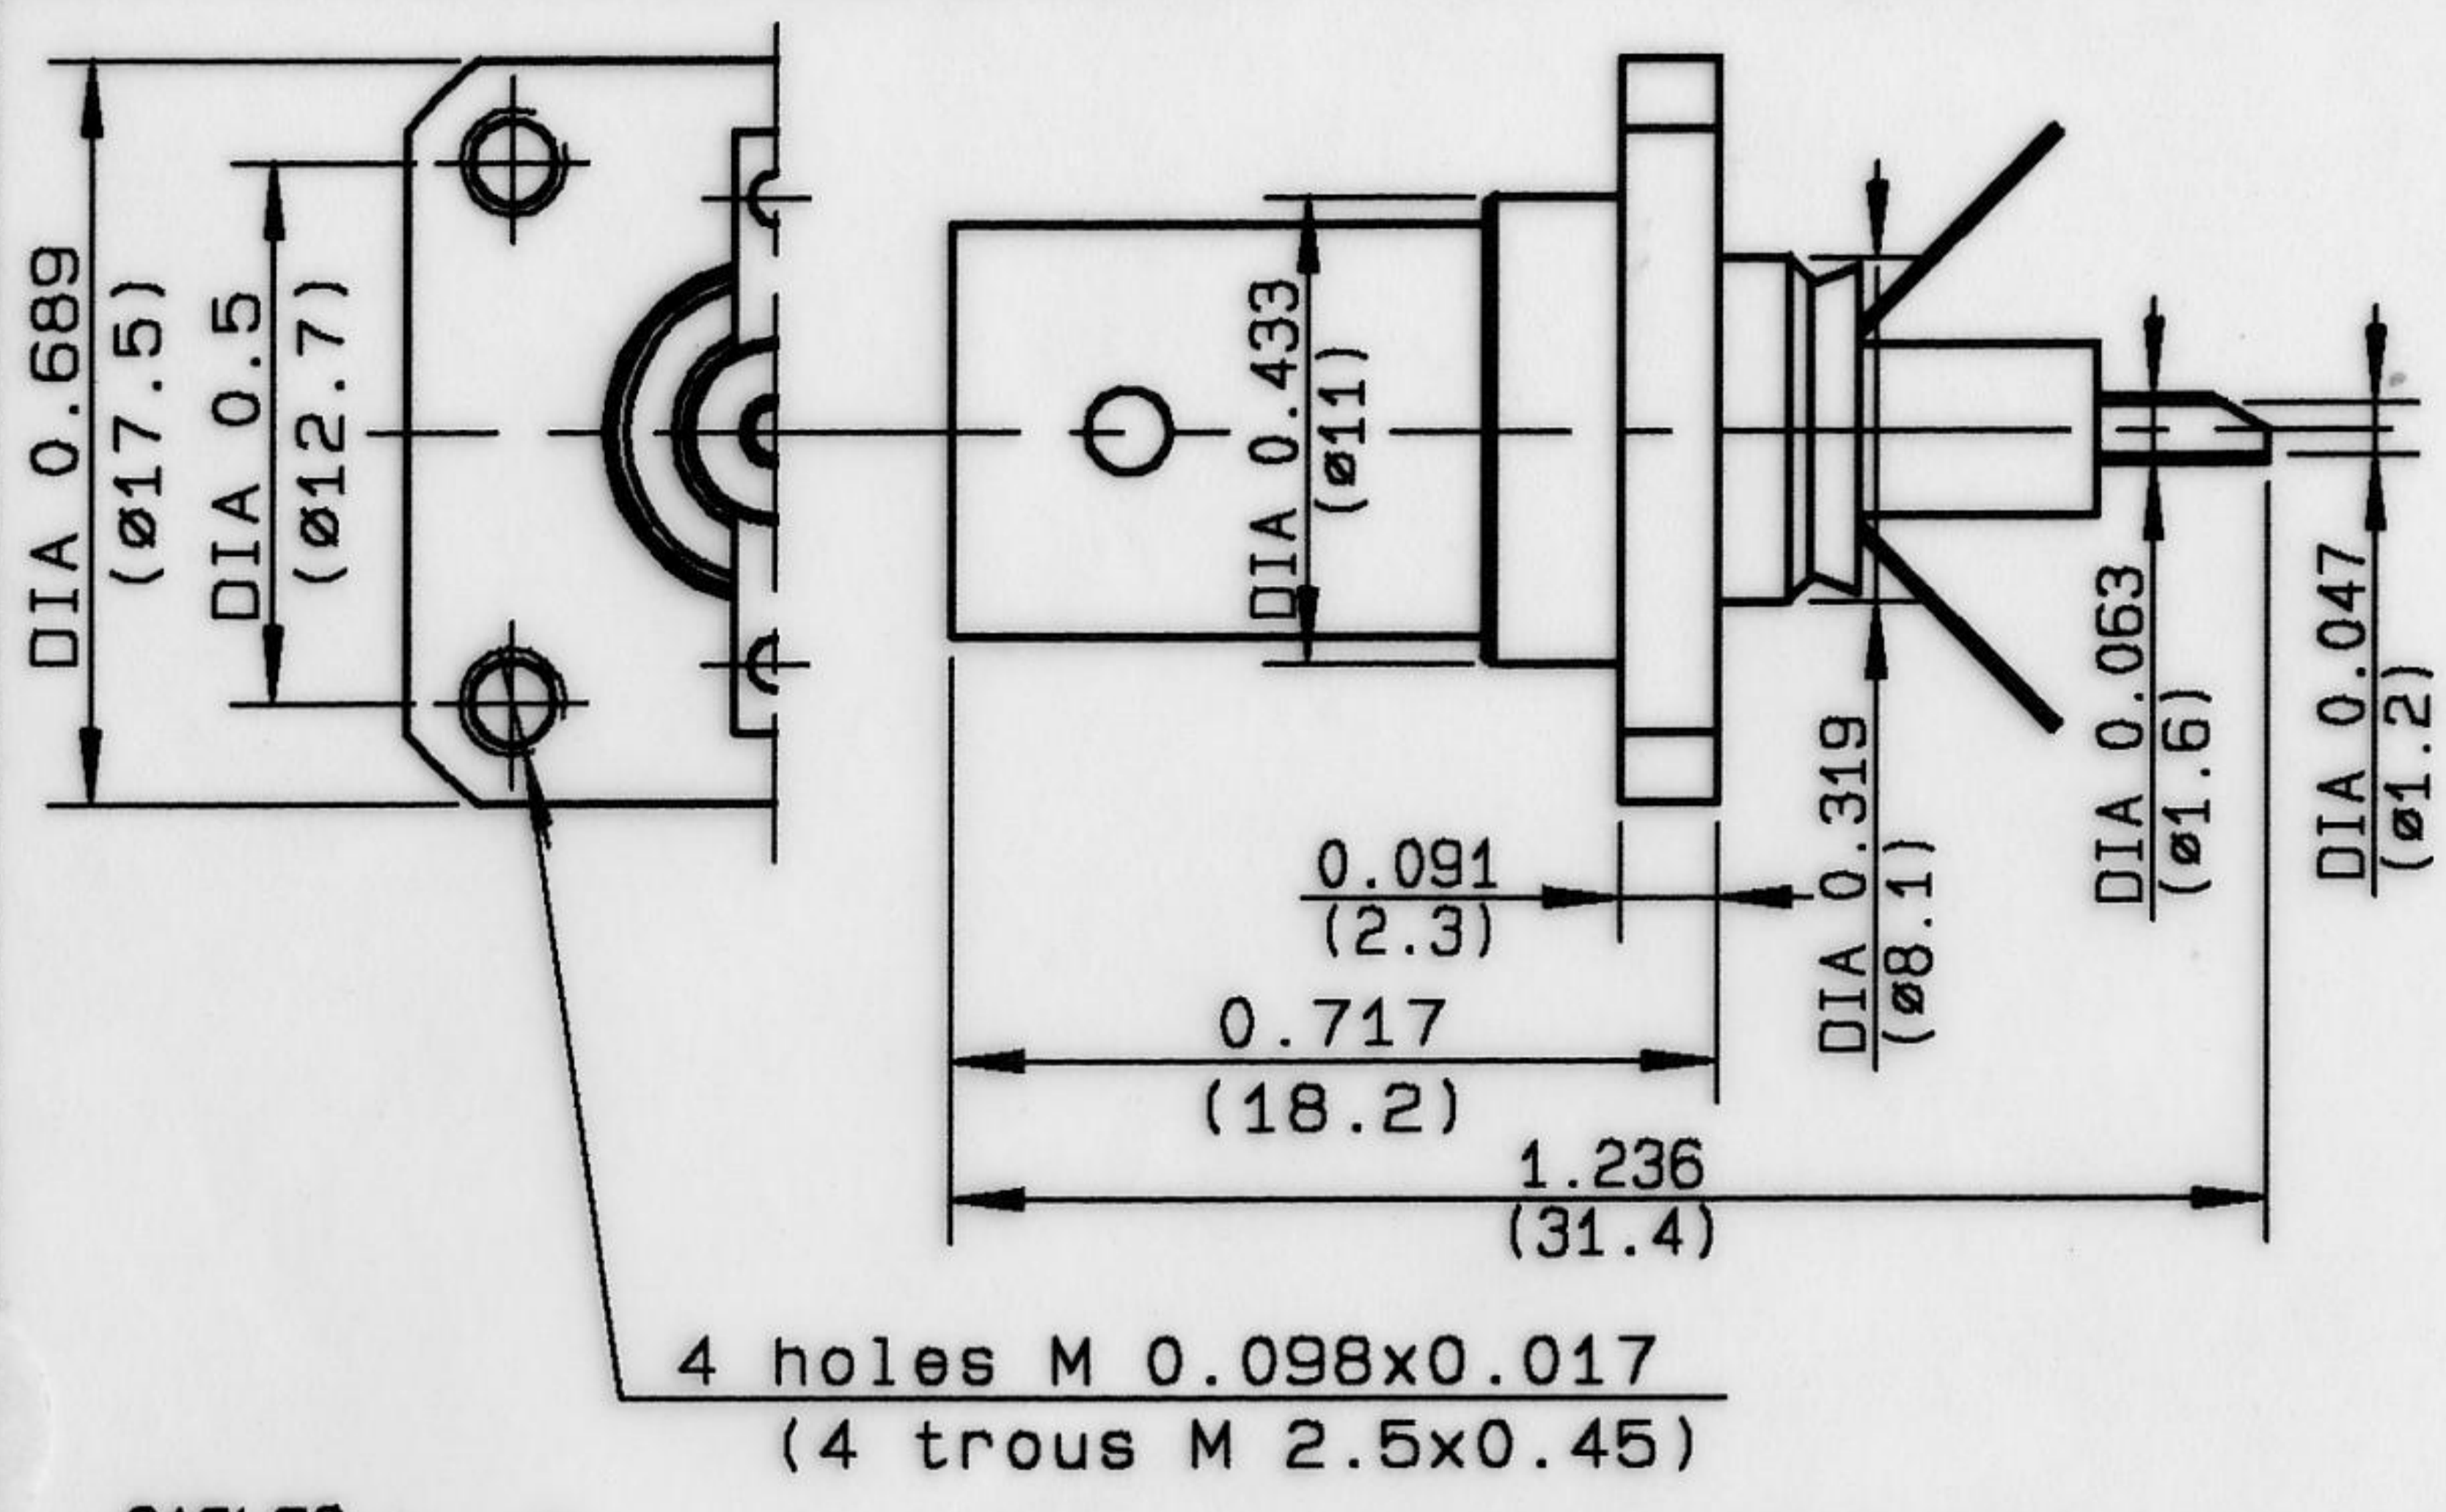

PERCAGE PANNEAU
MOUNTING HOLE

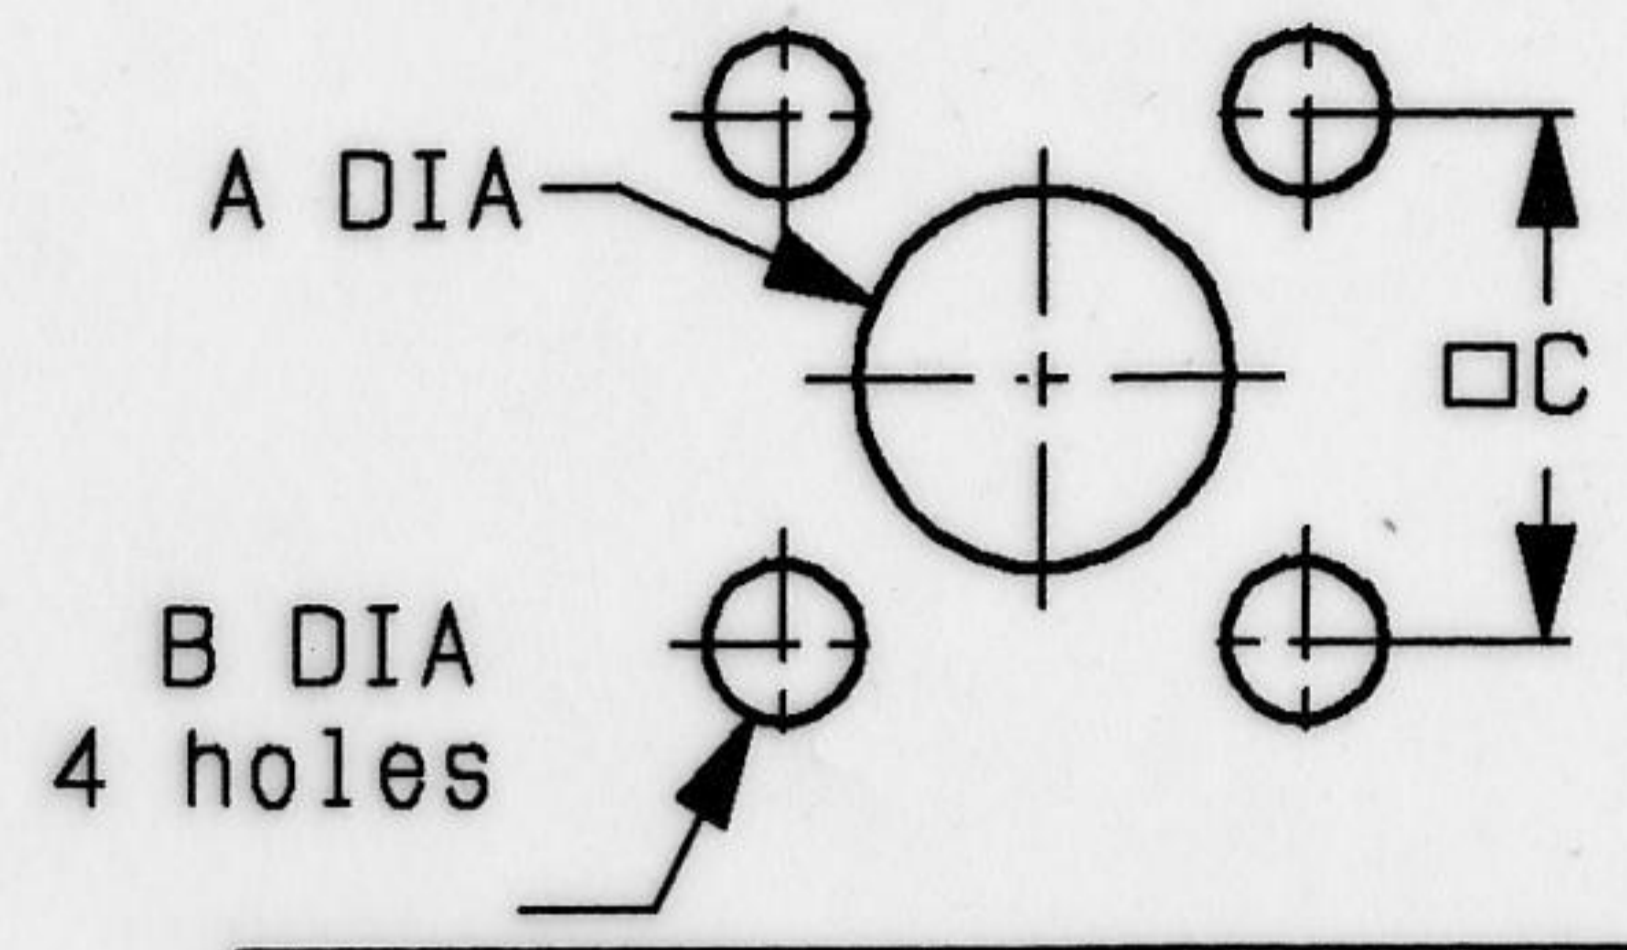

	MM		INCH	
	maxi	mini	maxi	mini
A	11.3	11.2	0.445	0.441
B	2.8	2.7	0.11	0.106
C	12.75	12.65	0.502	0.498

CABLES : -

CHARACTERISTICS

NOMINAL IMPEDANCE	50 Ω
FREQUENCY RANGE	0-10 GHz
TEMPERATURE RATING	-55/+125 °C
VSWR	- + 0 x F(GHz)Maxi
RF INSERTION LOSS	- √F(GHz) dB Maxi
VOLTAGE RATING	500 Vrms Max
DIELECTRIC WITHSTANDING VOLTAGE	1500 Vrms min
INSULATION RESISTANCE	- MΩ min
HERMETIC SEAL	- cc/s - Atm.cm3/s
LEAKAGE (pressurized only)	- psi - MPa
WEIGHT	0.4107 Oz 11.5 g

STANDARDISATION	-
CABLE RETENTION	0 lb min N
CENTER CONTACT RETENTION	-
Axial force - mating end	6.06 ²⁷ lb min N
Axial force - opposite end	6.06 ²⁷ lb min N
Torque (Min)	3.96 ^{2.8} Inch.oz cm.N
RECOMMENDED TORQUES	-
Mating	0 Inch.lb cm.N
Panel nut	0 Inch.lb cm.N
Clamp nut	0 Inch.lb cm.N

CONSTRUCTION

CONNECTOR PARTS	MATERIALS	FINISH
BODY	BRASS	NICKEL
OUTER CONTACT	BRONZE PHOSPHOR	NICKEL
CENTER CONTACT	BRASS	GOLD
INSULATOR	PTFE	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

ISSUE	REVISION No	DESCRIPTION	BY	DATE
-	-	-	-	-
-	-	-	-	-
9602	-	SEIZE PLANE CAO	RODRIGUEZ	10/01/96

Initiated on 10/01/96
Approval by MEYNIER

The information given here is subject to change without notice. Design changes may be in order to improve the product.

