


MOUNTING HOLE



(---) DIMENSIONS IN MM

WEIGHT 0 oz (..... g)

Cable : RG 178/U , RG 196/U

CHARACTERISTICS

NOMINAL IMPEDANCE	50 Ω	STANDARDISATION	-
FREQUENCY RANGE	0-3 GHz		-
TEMPERATURE RATING	-55 \circ +155 \circ C		-
VSWR	NA Max		-
RF INSERTION LOSS	NA dB Max	CABLE RETENTION	7.2 Lb Max 32 N Max
VOLTAGE RATING	750 Vrms	CENTER CONTACT RETENTION	
DIELECTRIC WITHSTANDING VOLTAGE	2000 Vrms	Axial force - mating end	0 Lb Max NA N Max
INSULATION RESISTANCE	NA M Ω	Axial force - opposite end	0 Lb Max NA N Max
HERMETIC SEAL	NA cc/s cm ³ /s	Torque (Max)	0 Inch.oz NA cm.N
LEAKAGE (pressurized only)	0 psi NA kg/cm ²	MATING TORQUE RECOMMENDED	0 Inch. Lb NA cm.N
-	-	-	-
-	-	-	-

CONSTRUCTION

CONNECTOR PARTS	MATERIALS	FINISH
Body	Brass	-
Outer contact	-	- Tin
Center contact	-	-
Insulators	-	-
Ferrule	Brass	Nickel
-	-	-
-	-	-
-	-	-
-	-	-

ISSUE	REVISION No	DESCRIPTION	BY	DATE

Initiated on 03 11 88

The information given here is subject to change without notice. Design changes may be in order to improve the product.





Superseded on ---

Panel cable receptacle, crimp-type
- cable 2/50

SERIES:


MCX

02/02



1-1 To slide ferrule on the cable


1-2 Cable stripping

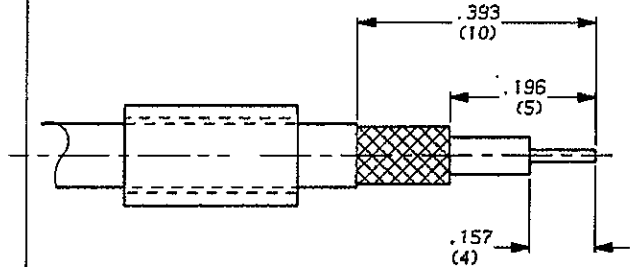

2-1 To open the braid

2-2 To slide body under braid


2-3 To slide the ferrule on braid according to F direction

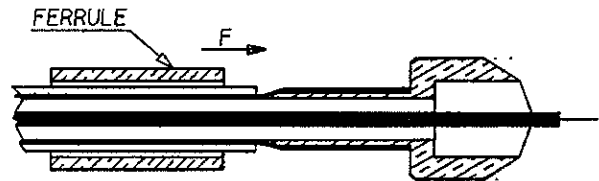

3-3 To crimp the ferrule

crimping tool R 282 271

Hex : .127 (3.25)

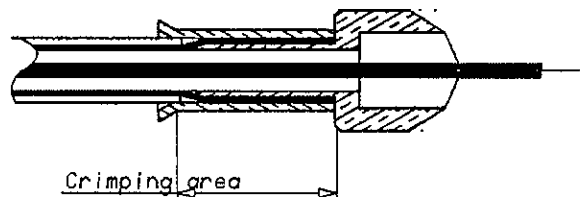

ISSUE	REVISION No	DESCRIPTION	BY	DATE

Initiated on 29 08 88

The information given here is subject to change without notice. Design changes may be in order to improve the product.



Superseded on _____