


UMP HIGHT 2 RIGHT ANGLE SLIDE

R285.020.222

20CM CABLE 1/50S-BR

Series : **CORD-STD**

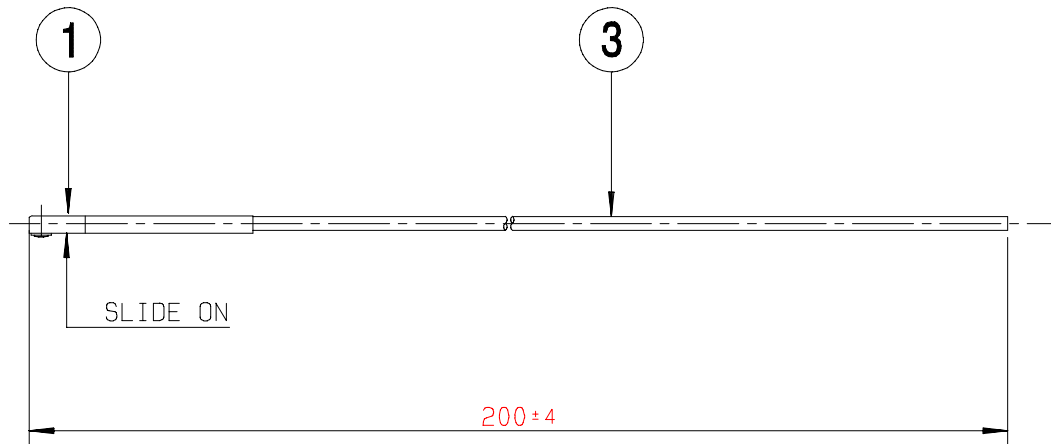

PACKAGING		
Standard	Unit	Other
100	'W' option	Contact us

- * 1 * Connector A : **R107.021.020**
 - * 2 * Connector B :
 - * 3 * Cable : **C291.050.066**
- Type : **CAB 1/55 - 50 VMTX - BLANC**

ELECTRICAL CHARACTERISTICS

Impedance	50 Ω
Frequency	0-3 GHz
Operating temperature	-40/+90 ° C
VSWR	NA + 0.000 x F(GHz) Maxi
Insertion loss	NA √F(GHz) dB Maxi
Voltage rating	100 Veff Maxi
Dielectric withstanding voltage	350 Veff mini
Insulation resistance	1000 MΩ mini

SPECIFICATION

Weight	0.900 g
Cable retention	NA N mini
Others :	

