


**R3C MALE COAX CAB 2.6/50**  
**PACKAGING IN REEL OF 2500**

**R299.197.000**

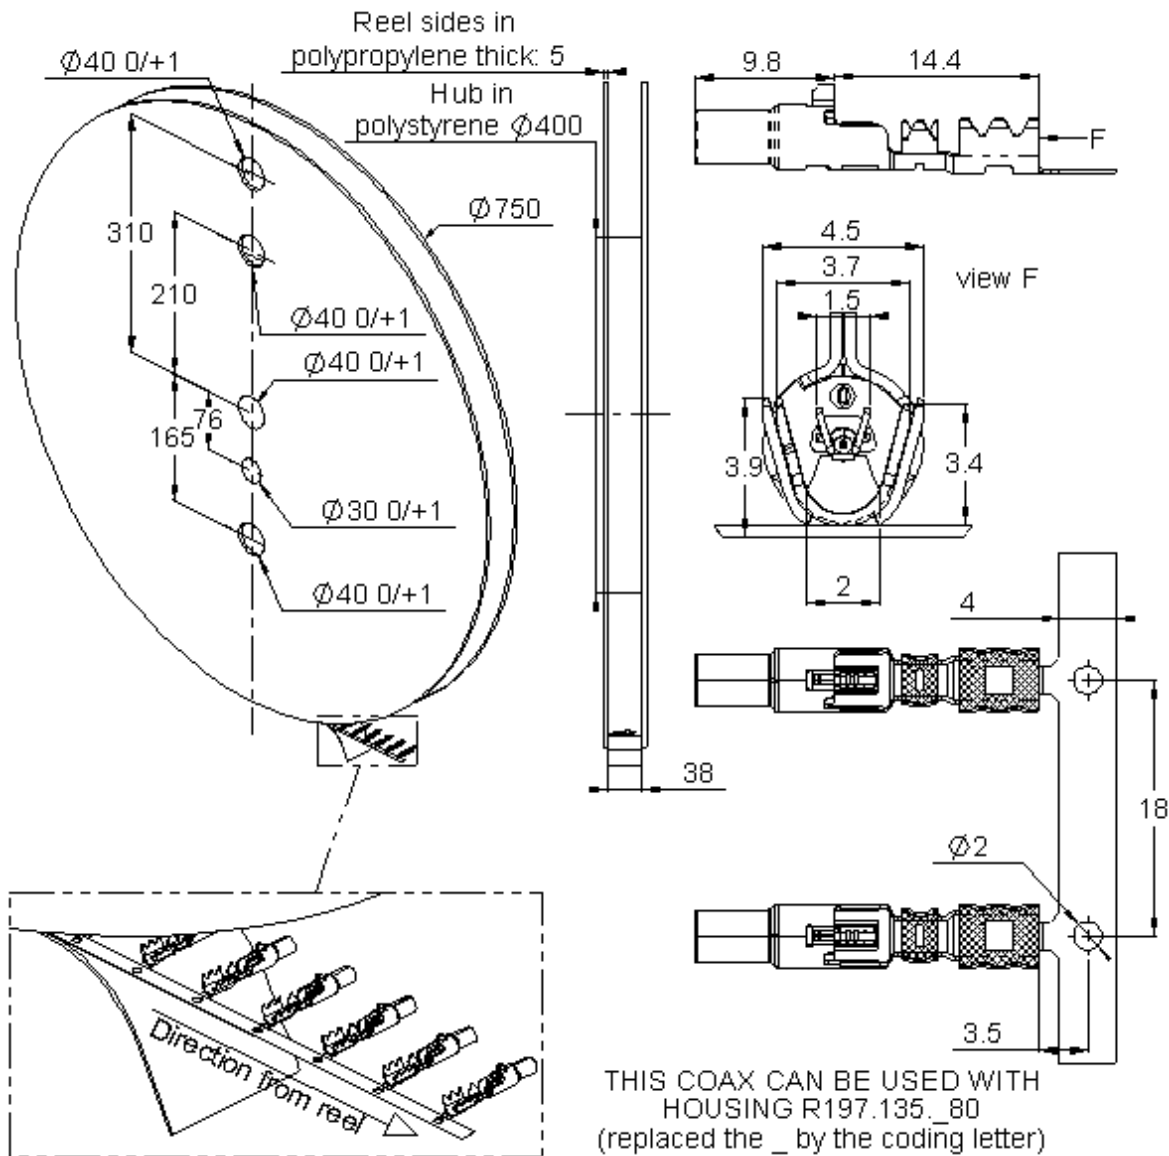

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING(µm)	UL CLASSIFICATION	COLOR
BODY	BRONZE	TIN 3 OVER NICKEL 2		
CENTER CONTACT	BRONZE	SELECTIVE GOLD+ SELECTIVE TIN		
OUTER CONTACT	-	-		
INSULATOR	POLYMER		UL94-V0	NATURAL
	-			
	-			
	-			

**Standard Packaging : 2500+/-2%\***

\* Nota : possibility of having a maximum of five missing parts consecutively on the tape

Issue : 0940 B


In the effort to improve our products, we reserve the right to make changes judged to be necessary.



**R3C MALE COAX CAB 2.6/50**  
**PACKAGING IN REEL OF 2500**

**R299.197.000**

**Recommended Stripping dimensions of the RG174 cable  
 for R3C male R299.197.000**

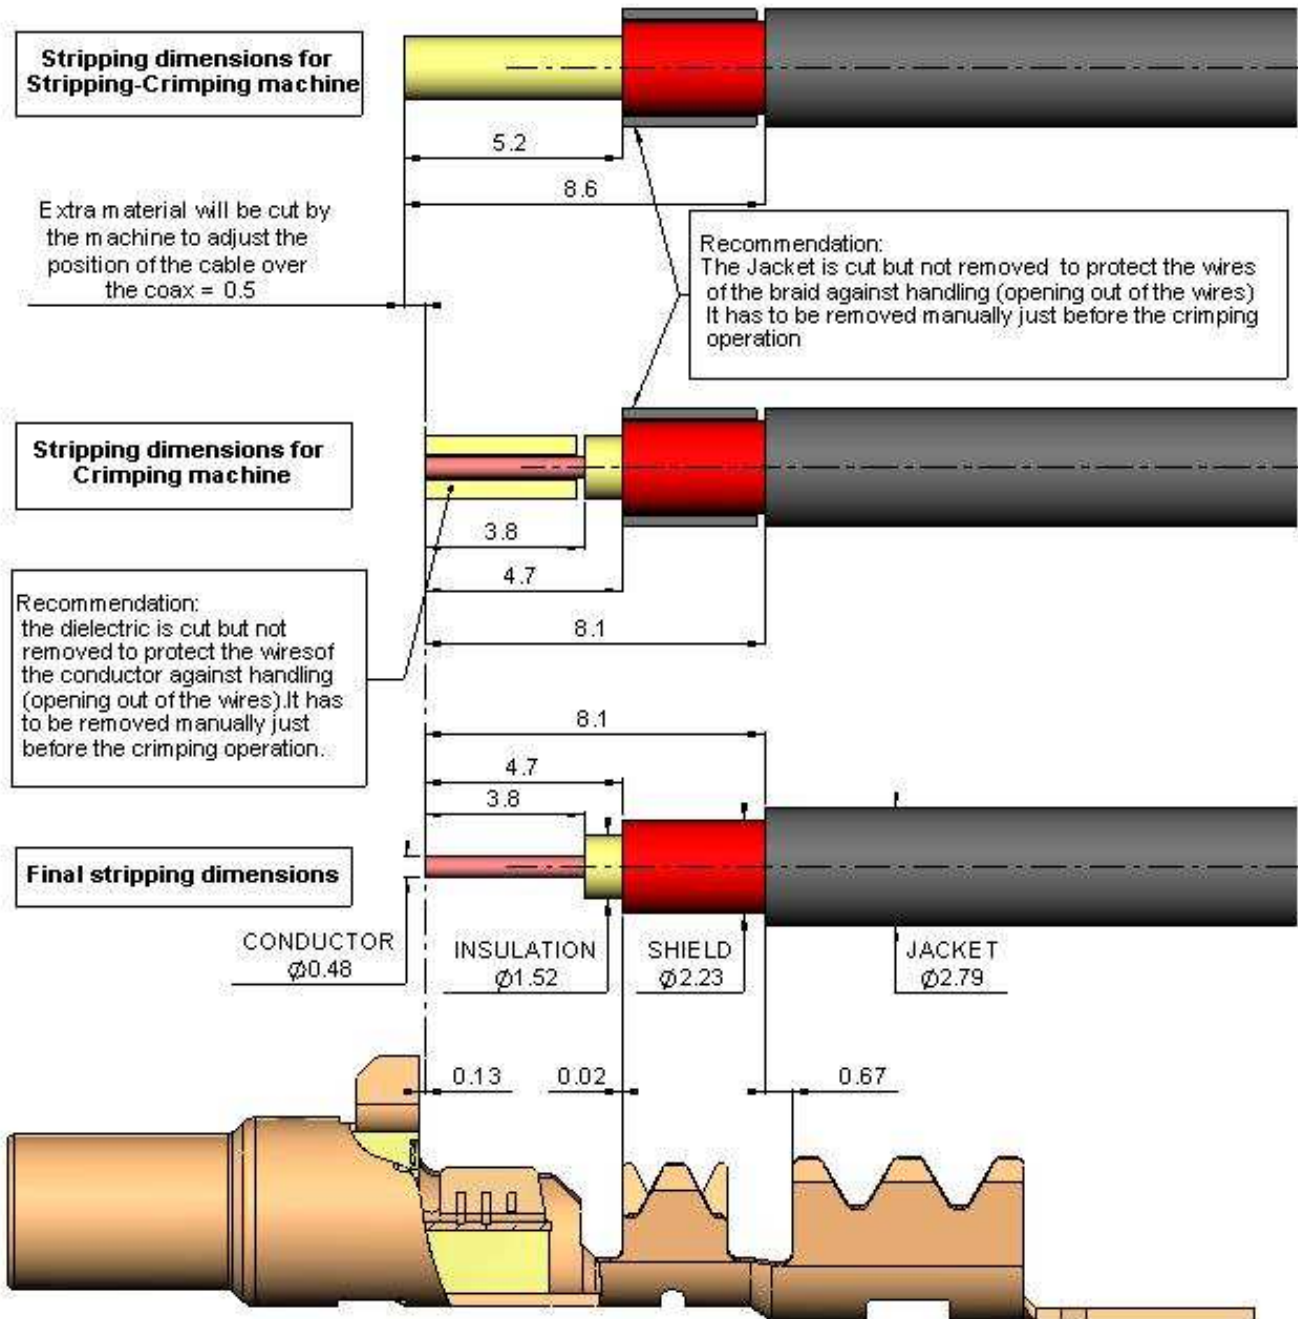

**PATENTED**

Issue : 0940 B



In the effort to improve our products, we reserve the right to make changes judged to be necessary.



**R3C MALE COAX CAB 2.6/50**  
**PACKAGING IN REEL OF 2500**

**R299.197.000**

crimping height **			
conductor X	braid Y	jacket Z	conductor/body W
0,82±0,05	2,32±0,05	2,8+0,1/-0,03	2,32±0,05

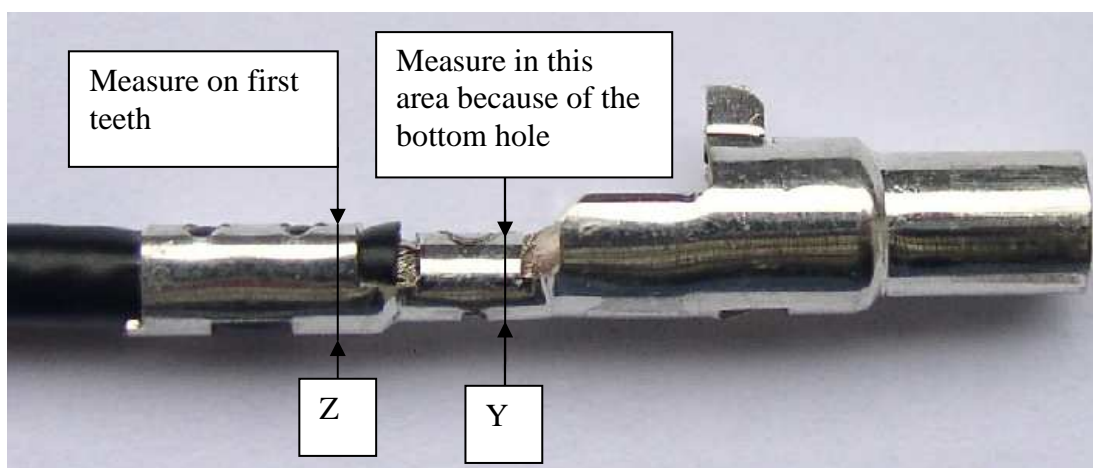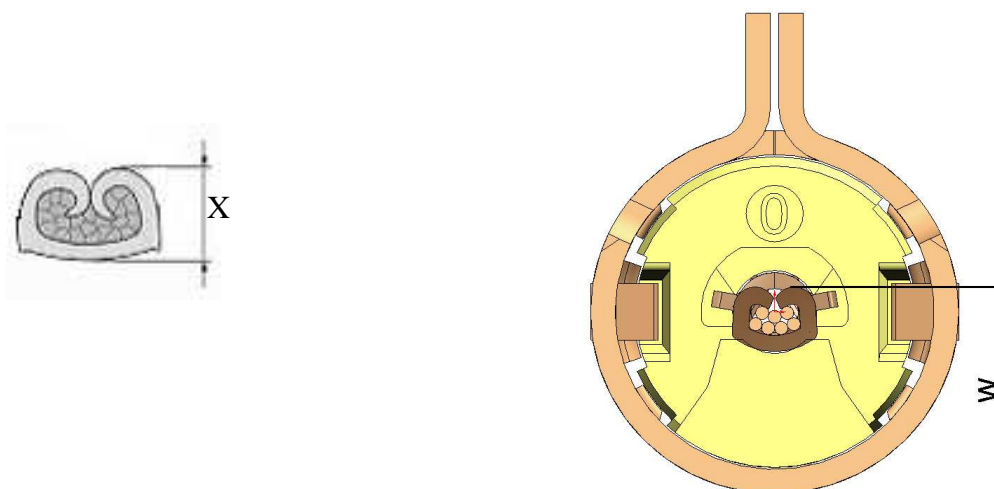

**\*\* CAUTION**

- Before using applicator, make sure the press is calibrated :135,8 mm from the lower dead point up to the base
- Crimping height may change depending on the manufacturer of the cable, for more informations please contact us
- We recommend to make electrical test after each set up of the applicator:
  - Outer and center contact continuity+Dielectric withstanding voltage 800Vrms, 50Hz
  - Insulation resistance 1000 Mohms
  - Cable retention = 110Newton mini during 5 seconds with electrical continuity