



R3C FEMALE COAX CAB 3.2/50
PACKAGING IN REEL OF 2500

R299.197.210

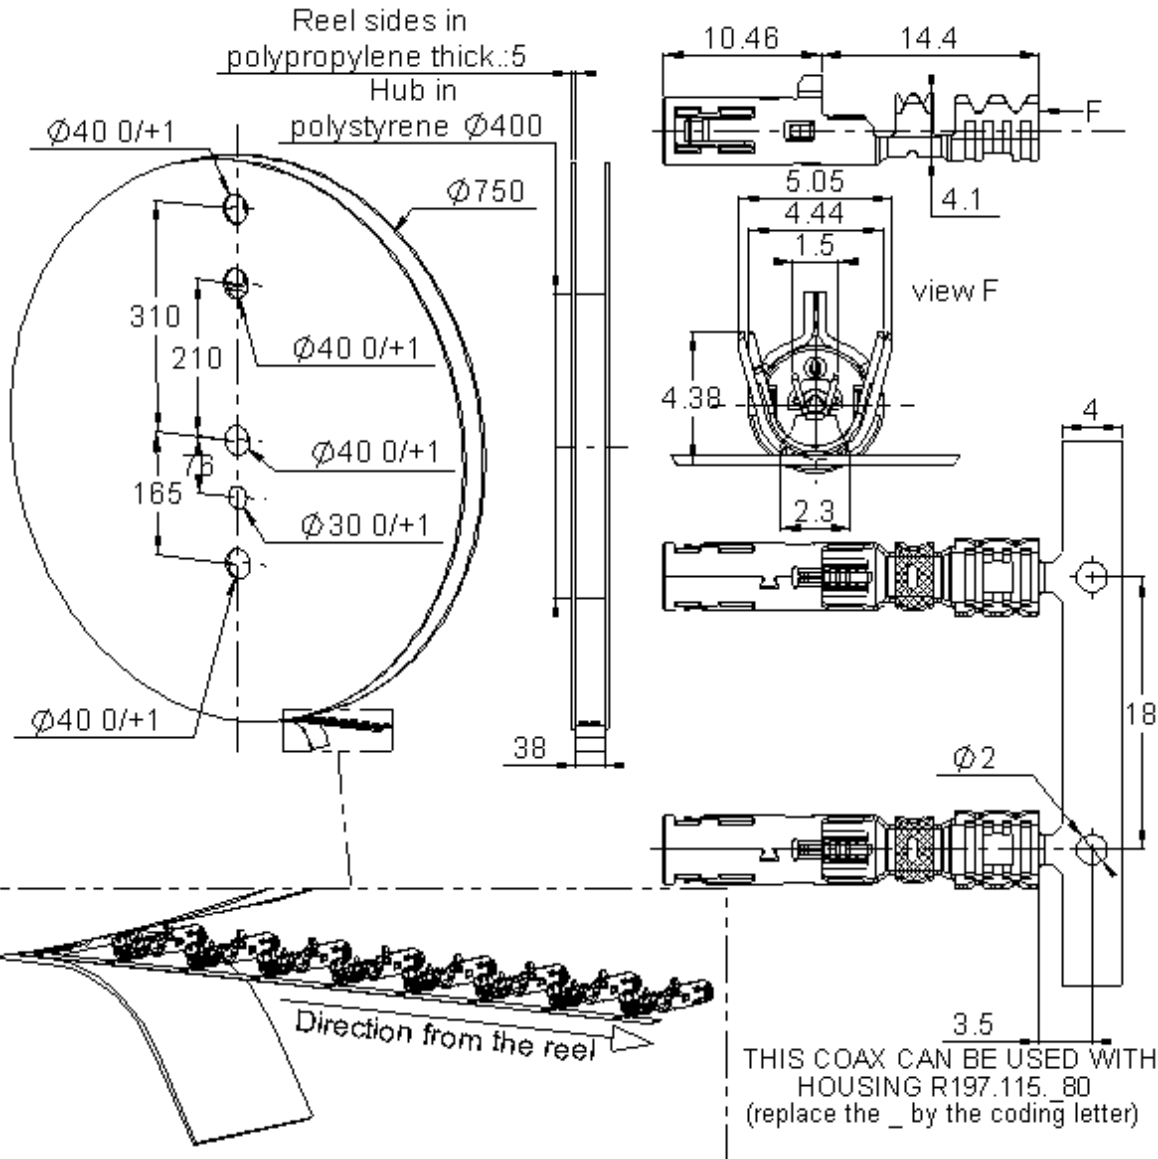

All dimensions are in mm.

THIS COAX CAN BE USED WITH HOUSING R197.115. 80 (replace the _ by the coding letter)



COMPONENTS	MATERIALS	PLATING (µm)	
BODY	BRONZE	TIN 3 OVER NICKEL 2	
CENTER CONTACT	BRONZE	SELECTIVE GOLD+ SELECTIVE TIN	
OUTER CONTACT	-	-	
INSULATOR	POLYMER	-	
	-	UL CLASSIFICATION	COLOR
	-	UL94-V0	NATURAL

Standard Packaging : 2500+/-2%*

* Nota : possibility of having a maximum of five missing parts consecutively on the tape

Issue : 0915 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




R3C FEMALE COAX CAB 3.2/50

PACKAGING IN REEL OF 2500

R299.197.210

Recommended Stripping dimensions of the RTK cable for R3C female R299.197.210

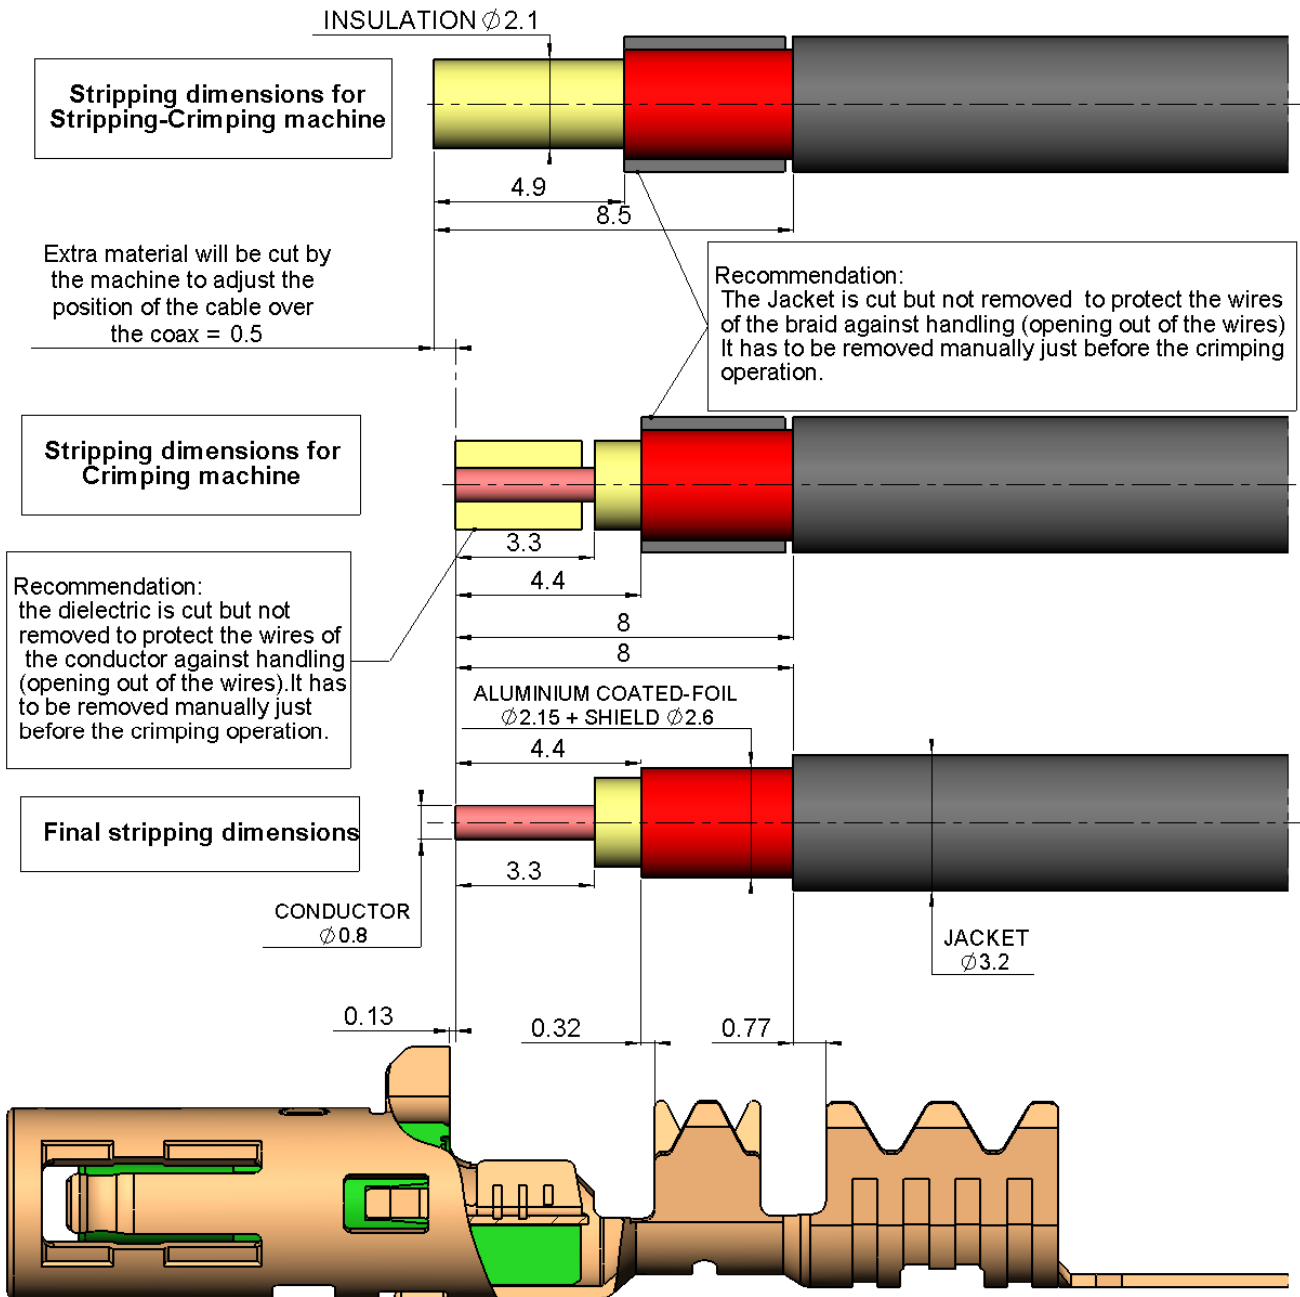

PATENTED

Issue : 0915 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.






R3C FEMALE COAX CAB 3.2/50

PACKAGING IN REEL OF 2500

R299.197.210

crimping height **			
conductor X	braid Y	jacket Z	conductor/body W
1±0,05	2,85±0,05	3,44±0,04	2,5±0,05

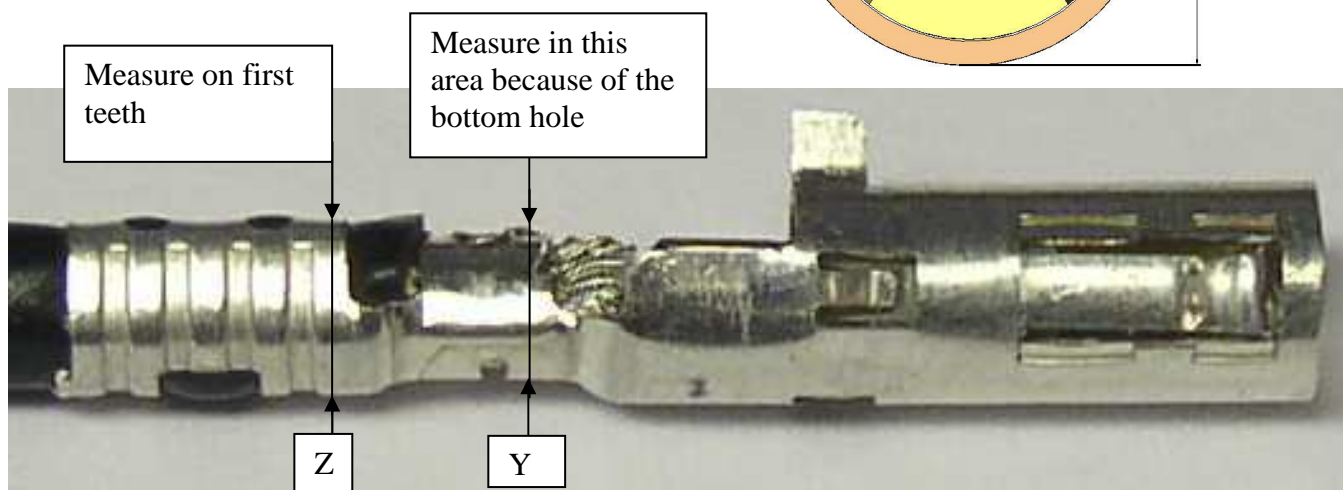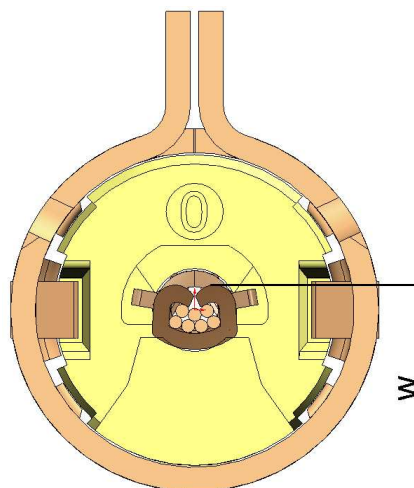

**** CAUTION**

- Before using applicator, make sure the press is calibrated :135,8 mm from the lower dead point up to the base
- Crimping height may change depending on the manufacturer of the cable, for more informations please contact us
- We recommend to make electrical test after each set up of the applicator:
 - Outer and center contact continuity+Dielectric withstanding voltage 800Vrms, 50Hz
 - Insulation resistance 1000 Mohms
 - Cable retention = 110Newton mini during 5 seconds with electrical continuity

Issue : 0915 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

