
R3C FEMALLE COAX CAB 5/50

PACKAGING REEL 2400

R299.197.230

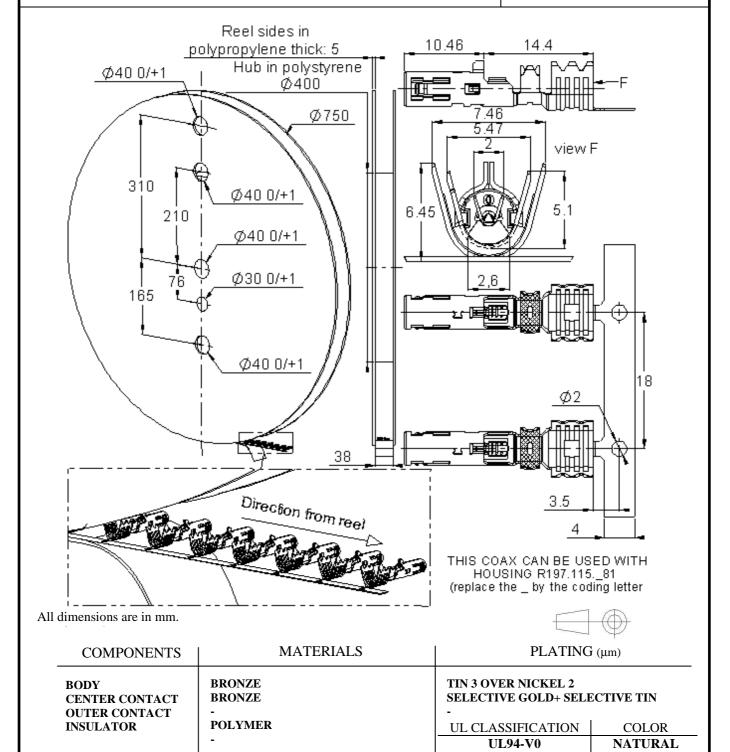

Standard Packaging: 2400+/-2%*

Issue: 0748 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




^{*} Nota: possibility of having a maximum of five missing parts consecutively on the tape

R3C FEMALLE COAX CAB 5/50

PACKAGING REEL 2400

R299.197.230

Recommanded Stripping dimensions of the RG58 cable for R3C female R299.197.230

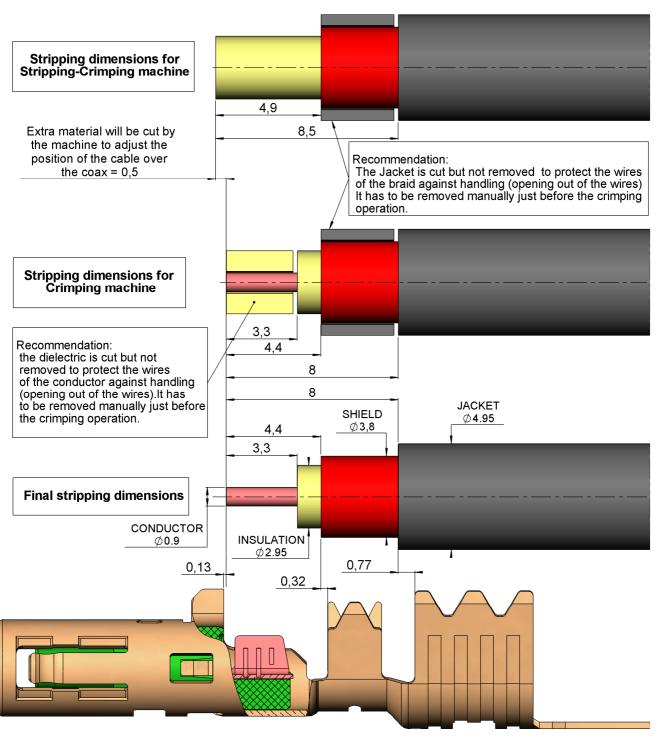



Issue: 0748 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.





R3C FEMALLE COAX CAB 5/50


PACKAGING REEL 2400

R299.197.230

crimping height **			
conductor X	braid Y	jacket Z	conductor/body W
1,18±0,05	3,7+0,05/-0,1	4,8+0,05/-0,1	2,7±0,05





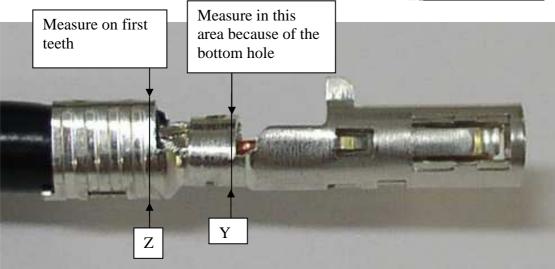

** CAUTION

- -Before using applicator, make sure the press is calibrated :135,8 mm from the lower dead point up to the base
- -Crimping height may change depending on the manufacturer of the cable, for more informations please contact us
- -We recommend to make electrical test after each set up of the applicator:

Outer and center contact continuity+Dielectric withstanding voltage 800Vrms, 50Hz Insulation resistance 1000 Mohms

Cable retention = 110Newton mini during 5 seconds with electrical continuity

Issue: 0748 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

