


SMT TERMINATION (ALN)


DC - 2.2 GHz 20 W (TRUE SURFACE MOUNT)

R401.211.105

Series :
TERMINATION

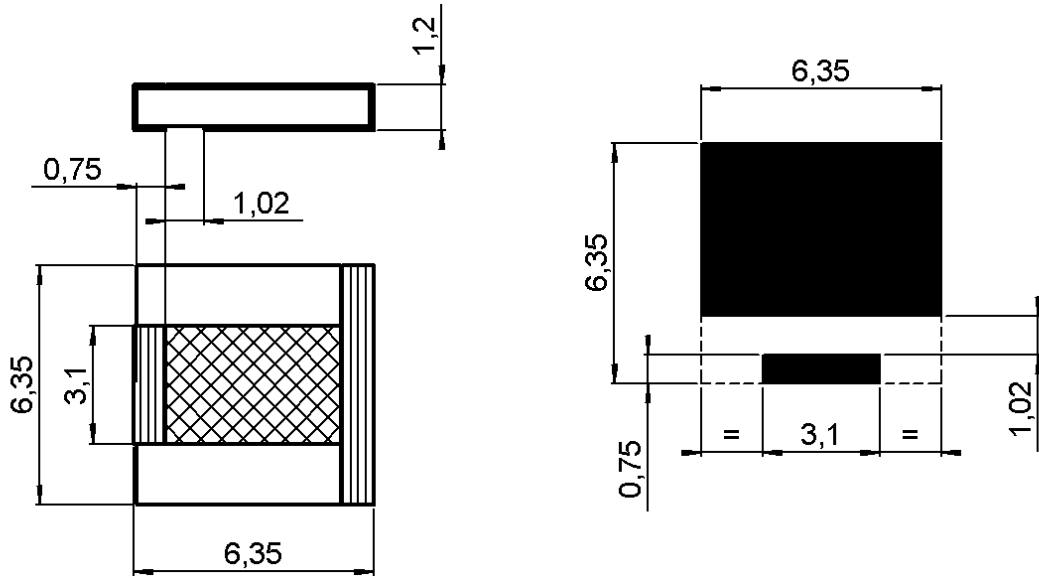

* CONDITIONNEMENT PAR 100
PACKAGING BY 100 *

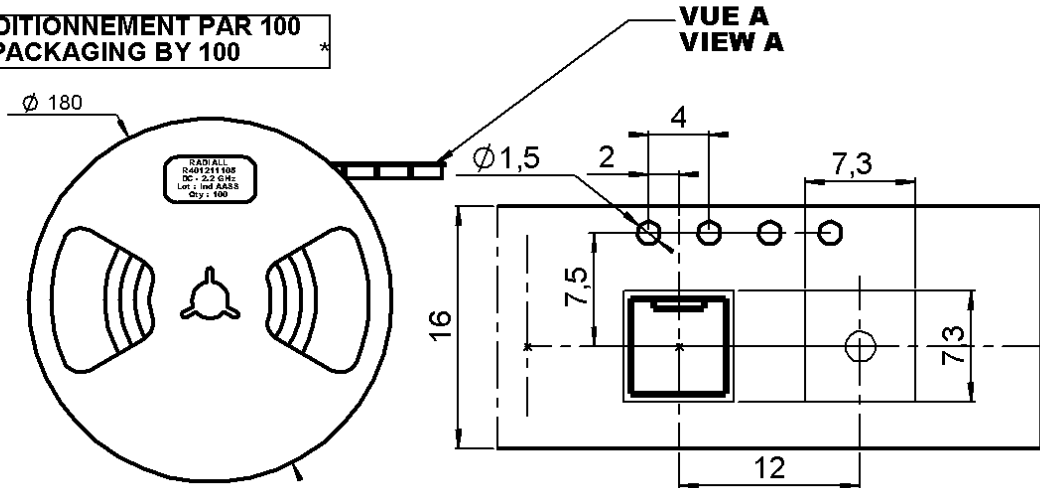

dimensions are in mm.



Weight	0,0000 g
Specification	

Issue : 0524 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



SMT TERMINATION (ALN)

R401.211.105

DC - 2.2 GHZ 20 W (TRUE SURFACE MOUNT)

Series :
TERMINATION

ELECTRICAL CHARACTERISTICS

Frequency range : DC – 2.2 GHz
 Impedance : 50 ohms ±5%
 Average Power : 20 W


Frequency	DC – 2.2 GHz				
V.S.W.R	<= 1.25				

MECHANICAL CHARACTERISTICS

Substrate : ALN
 Resistive film type : Thick film
 Protective coating : Epoxy
 Solderable terminal & ground : AgPd

OTHER CHARACTERISTICS

Power derating
Versus temperature

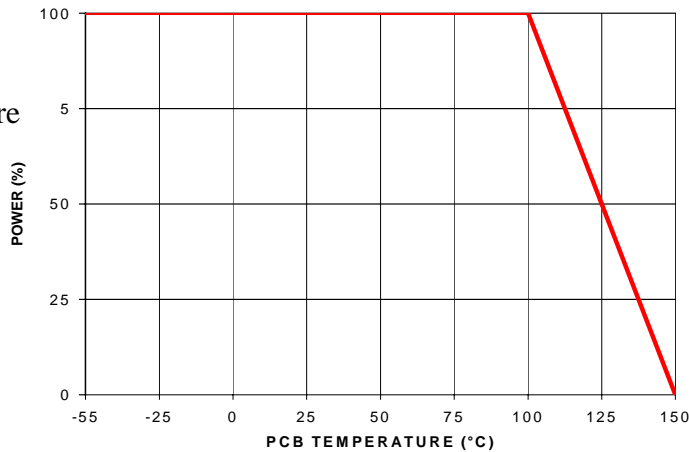

ENVIRONMENTAL

Operating temperature range : -55°C + 150°C

Issue : 0524 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

