
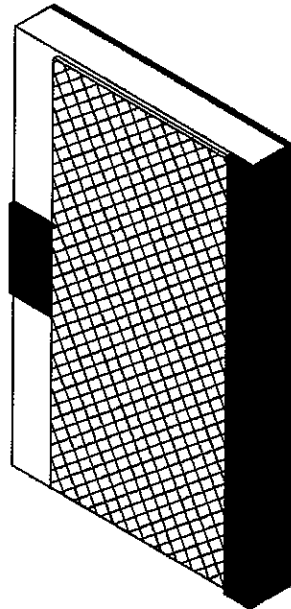
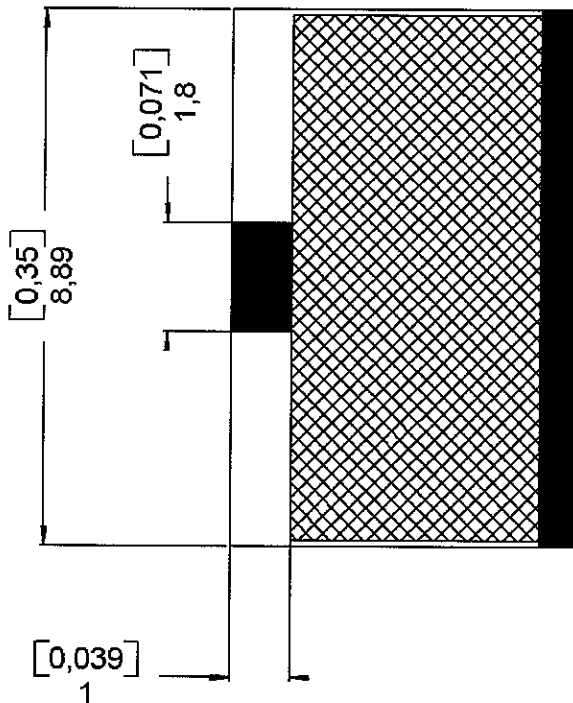


CHIP TERMINATION (ALN)

DC - 5 GHZ 100 W


R401.420.105

Series :
TERMINATION

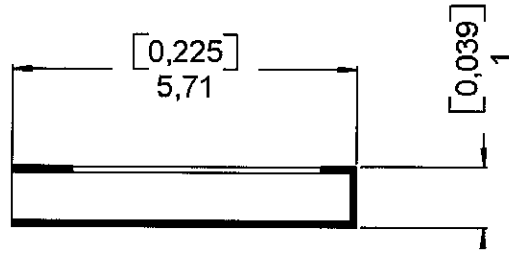

Packaged in a bag of 100 pieces

dimensions are in mm.



Issue : 0640 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



RADIALL®

CHIP TERMINATION (ALN)

R401.420.105

DC - 5 GHZ 100 W

Series :
TERMINATION

ELECTRICAL CHARACTERISTICS

Frequency range: DC - 5 GHz
 Impedance: 50 ohms ±5%
 Average Power: 100 W

Frequency	DC - 5 GHz
V.S.W.R	≤1.10


MECHANICAL CHARACTERISTICS

Substrate: AlN
 Resistive film: Thick film
 Protection film: Epoxy
 Contacts: PtAg
 Finition: Ni / Sn

OTHER CHARACTERISTICS

ENVIRONMENTAL

Power derating
 Versus temperature

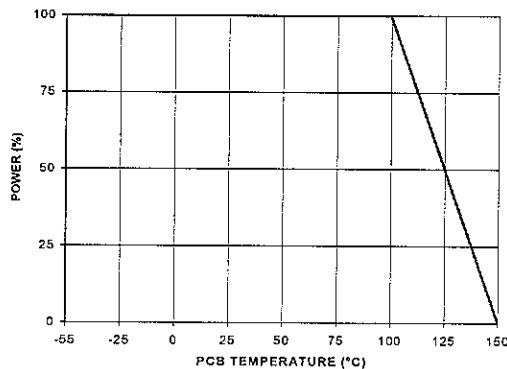

Operating temperature range: -55°C / +150°C

Issue : 0640 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

