


This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

1 W DC-12.4GHz N/male COAXIAL TERMINATION

issue
01. apr. 93

Page
1 / 1

DRAWING

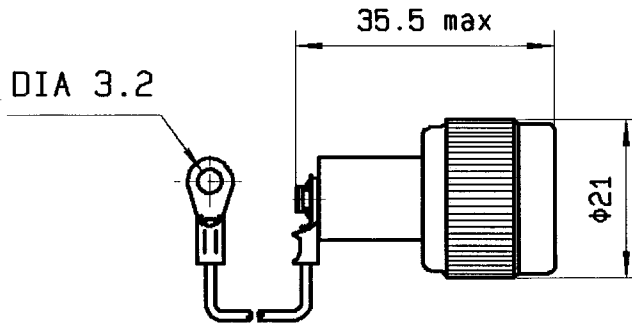

Small cord
length=70 mm

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS


FREQUENCY RANGE	:	DC - 12.4 GHz
IMPEDANCE	:	50 Ohms
DC RESISTANCE	:	50 Ohms ± 5 %
V.S.W.R :	DC - 4 GHz	: <= 1.05
	4 - 8 GHz	: <= 1.10
	8 - 12.4 GHz	: <= 1.15
PEAK POWER at 25°C (1µs,1%.)	:	500 W
AVERAGE POWER at 25°C	:	1 W

MECHANICAL CHARACTERISTICS

CONNECTORS	:	N male	per MIL-C 39012
WEIGHT	:	< 40 g	

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE	(°C)	:	-55 , +125
STORAGE TEMPERATURE RANGE	(°C)	:	-55 , +125

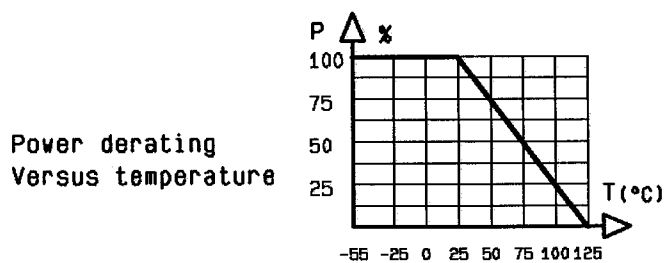

QUALITY MO
Dpt app B

CREATION
PEN : CAT
EP :
Nom : VE
Date : 01. apr. 93

ISSUE	REVISIONS	NAME

RADIALL®

101. Philibert Hoffmann Phone: 33.1.49353535
- Z.I Oust - Fax : 33.1.48546363
93116 ROSNY/BOIS Cedex-FRANCE Tlx RADIA 235220F