




0.5 W DC- 18 GHz SSMA/male COAXIAL TERMINATION

issue 03. jan. 95 Page 1 / 1

DRAWING



General tolerances: +/- 0.5 mm

R F CHARACTERISTICS


FREQUENCY RANGE	: DC - 18 GHz
IMPEDANCE	: 50 Ohms
DC RESISTANCE	: 50 Ohms ± 5 %
V.S.W.R :	DC - 4 GHz : ≤ 1.10
	4 - 12.4 GHz : ≤ 1.15
	12.4 - 18 GHz : ≤ 1.35
PEAK POWER at 25°C (1µs,1%.)	: 100 W
AVERAGE POWER at 25°C	: 0.5 W

MECHANICAL CHARACTERISTICS

CONNECTORS	: SSMA male	per CECC 22160
WEIGHT	: < 4 g	

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C)	: -55 , +125
STORAGE TEMPERATURE RANGE (°C)	: -55 , +125

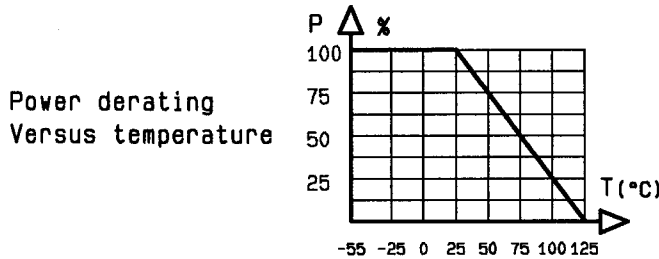

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

CREATION				
N° : H94012007				
PEN/EP:94228				
Name: JC				
Date: 03. jan. 95				
APP.: VE				
ISSUE	REVISIONS	NAME	APPR.	

RADIALL®
101. rue P. Hoffmann - Z.I Ouest -
93116 ROSNY/BOIS Cedex-FRANCE
Phone: 33(1)49353535
Fax : 33(1)48546363
Tvx RADIA 235220F