


TITLE: 6 W 12.4GHZ SMA/fem COAXIAL TERMINATION

LTR. B

DRAWING



General tolerances: +/- 0.5 mm

ELECTRICAL CHARACTERISTICS


FREQUENCY RANGE	:	DC - 12.4GHz
IMPEDANCE	:	50 Ohms
AVERAGE POWER HANDLING	:	6 W at 75°C
PEAK POWER HANDLING	:	4 kW (1 μs, 1%.) at 25°C
V.S.W.R :	DC - 4 GHz	: <=1.10
	4 - 8 GHz	: <=1.20
	8 - 12.4 GHz	: <=1.30

MECHANICAL CHARACTERISTICS

CONNECTOR	:	SMA female	per MIL C 39012
MAXIMUM WEIGHT	:	22	grams

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C)	:	-55 ; +125
STORAGE TEMPERATURE RANGE (°C)	:	-55 ; +125

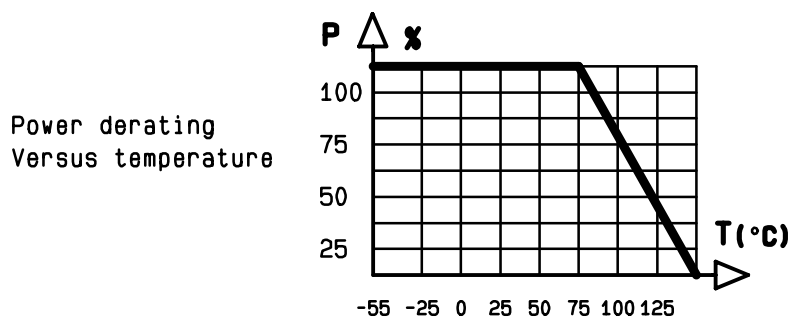

Tentative data subject to change without notice

PEN CAT	QUALITY Dpt App.				
PAGE 1 / 1	DATE 10.03.92	NAME DP	B	New format	22.10.92 PG
			LTR	REVISIONS	DATE APP.