

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary




DC- 4 GHz 7/16/male

COAXIAL TERMINATION

issue
02.jun.99

Page
1 / 1

DRAWING

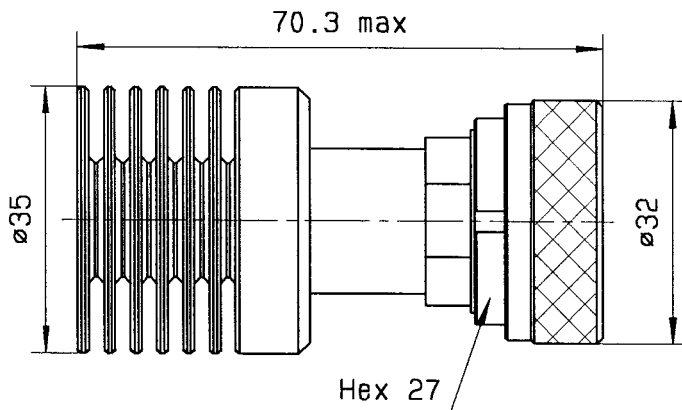

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS


FREQUENCY RANGE	:	DC - 4 GHz
IMPEDANCE	:	50 Ohms
DC RESISTANCE	:	50 Ohms ± 5 %
V.S.W.R :	DC - 2 GHz	: ≤ 1.10
	2 - 4 GHz	: ≤ 1.20
PEAK POWER at 25°C (1µs,1%.)	:	4 kW
AVERAGE POWER at 25°C	:	12 W

MECHANICAL CHARACTERISTICS

CONNECTORS	:	7/16male	per IEC 169-4
WEIGHT	:	< 170 g	

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE	(°C)	:	-40	,	+85
STORAGE TEMPERATURE RANGE	(°C)	:	-40	,	+85

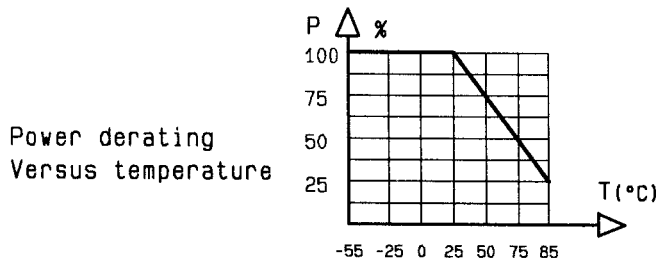

CREATION					
N° :					
PEN/EP:H92016					
Name:MG					
Date:04.apr.96	02.jun.99	New body		MG	AFA
APP.:AF	ISSUE		REVISIONS	NAME	APPR.

RADIALL®

101. rue P. Hoffmann -Z.I Ouest-
93116 ROSNY/BOIS Cedex-FRANCE
Phone :33(1)49353535
Fax :33(1)48546363
Tlx RADIA 235220F