




DRAWING

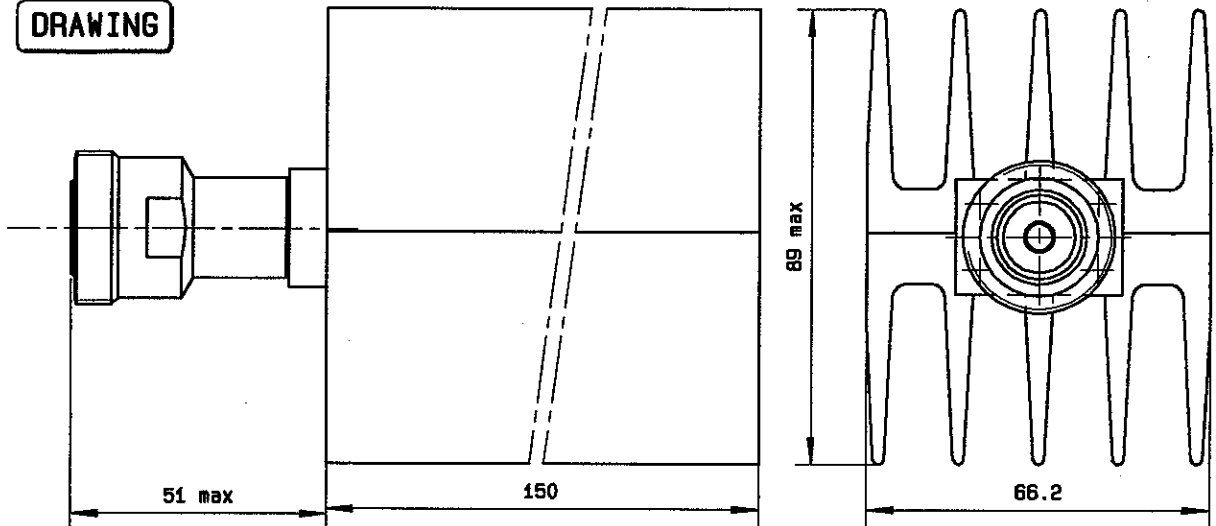

R F CHARACTERISTICS

General tolerances: +/- 0.5 mm


FREQUENCY RANGE	:	DC - 2 GHz
IMPEDANCE	:	50 Ohms
DC RESISTANCE	:	50 Ohms ± 5 %
V.S.W.R :	DC - 1 GHz	: <= 1.10
	1 - 2 GHz	: <= 1.20
PEAK POWER at 25°C (1µs, 1%.)	:	5 kW
AVERAGE POWER at 25°C	:	100 W

MECHANICAL CHARACTERISTICS

CONNECTORS	:	7/16female	per IEC 169-4
WEIGHT	:	< 1045 g	

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE	(°C)	:	-40 , +85
STORAGE TEMPERATURE RANGE	(°C)	:	-40 , +85

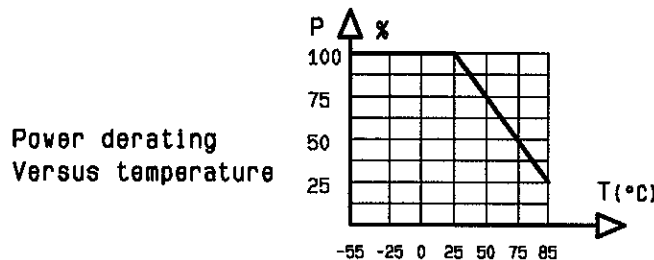

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

4112-9212

CREATION N° : PEN/EP:H92016 Name:MG Date:05.apr.96 APP.:AF					
ISSUE	REVISIONS	NAME	APPR.		

RADIALL®
101. rue P. Hoffmann -Z.I Ouest-
93116 ROSNY/BOIS Cedex-FRANCE
Phone :33(1)49353535
Fax :33(1)48546363
Txv RADIA 235220F