




TITLE: 1 W 2.4 GHz SMZ/f COAXIAL TERMINATION

issue
24.sep.99

Page
1 / 1

DRAWING

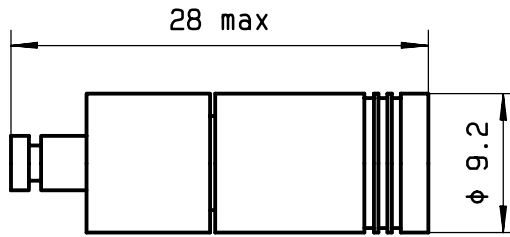

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS


FREQUENCY RANGE	:	DC - 2.4 GHz
IMPEDANCE	:	75 Ohms
DC RESISTANCE	:	75 Ohms ± 5 %
V.S.W.R :	DC - 1 GHz	: ≤ 1.08
	1 - 2 GHz	: ≤ 1.15
	2 - 2.4 GHz	: ≤ 1.20
PEAK POWER at 25°C (1µs,1%.)	:	500 W
AVERAGE POWER at 25°C	:	1 W

MECHANICAL CHARACTERISTICS

CONNECTORS	:	SMZ female per IEC 169-1
WEIGHT	:	< 8 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C)	:	-55 , +125
STORAGE TEMPERATURE RANGE (°C)	:	-55 , +125

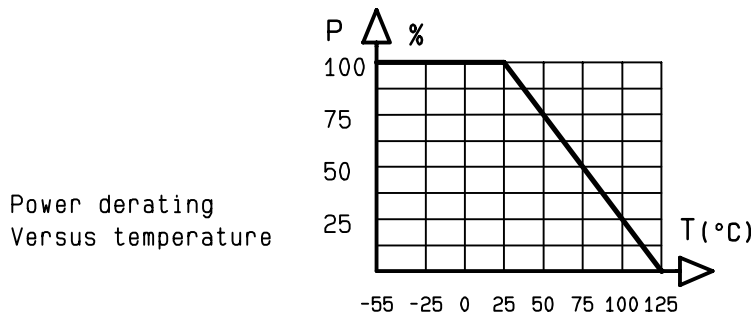

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

CREATION				
N° :				
PEN/EP:87130				
Name:MG				
Date:12.aug.87	24.sep.99	Add RF performances	MG	AF
APP.:AF	ISSUE	REVISIONS	NAME	APPR.