



1 W

DC- 3 GHz


N

COAXIAL ATTENUATOR

issue  
3.feb.98

Page  
1 / 1

**DRAWING**

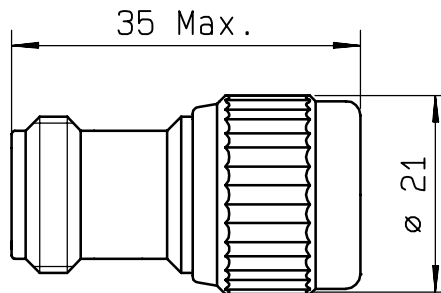

General tolerances: +/- 0.5 mm

**R F CHARACTERISTICS**

FREQUENCY RANGE : DC - 3 GHz  
 IMPEDANCE : 50 Ohms  
 ATTENUATION - NOMINAL : 15 dB

FREQUENCY	DC- 2 GHz	2 - 3 GHz
V.S.W.R	<= 1.20	<= 1.30
DEVIATION (dB)	+0.5 / -0.5	+0.5 / -0.5


PEAK POWER at 25°C (1µs,1%.) : 100 W  
 AVERAGE POWER at 25°C : 1 W

**MECHANICAL CHARACTERISTICS**

CONNECTORS : N male/female per MIL-C 39012  
 WEIGHT : < 43 g

**ENVIRONMENTAL CHARACTERISTICS**

OPERATING TEMPERATURE RANGE (°C) : -40 , +85  
 STORAGE TEMPERATURE RANGE (°C) : -40 , +85

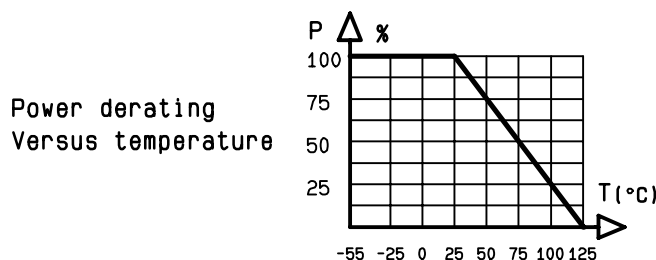

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

CREATION					
N° :					
PEN/EP:CAT					
Name:SR					
Date:3.feb.98					
APP.:AF					
ISSUE		REVISIONS		NAME	APPR.

**RADIAL<sup>®</sup>**

101. rue P. Hoffmann -Z.I Ouest-  
 93116 ROSNY/BOIS Cedex-FRANCE  
 Phone:33(1)49353535  
 Fax :33(1)48546363  
 Twx RADIA 235220F

4112-9212