



1 W

DC- 3 GHz


N

COAXIAL ATTENUATOR

issue
3.feb.98

Page
1 / 1

DRAWING

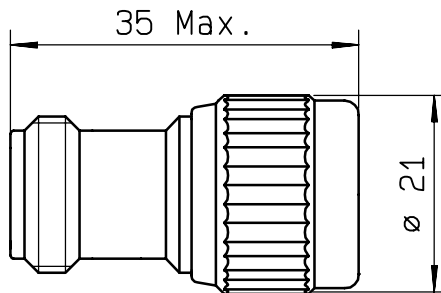

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : DC - 3 GHz
 IMPEDANCE : 50 Ohms
 ATTENUATION - NOMINAL : 16 dB

FREQUENCY	DC- 2 GHz	2 - 3 GHz
V.S.W.R	<= 1.20	<= 1.30
DEVIATION (dB)	+0.7 / -0.7	+0.7 / -0.7


PEAK POWER at 25°C (1µs,1%*) : 100 W
 AVERAGE POWER at 25°C : 1 W

MECHANICAL CHARACTERISTICS

CONNECTORS : N male/female per MIL-C 39012
 WEIGHT : < 43 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -40 , +85
 STORAGE TEMPERATURE RANGE (°C) : -40 , +85

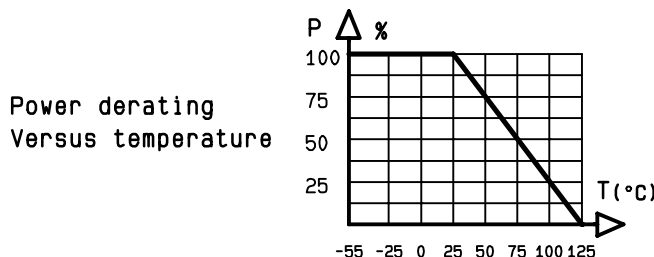

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

CREATION

N° :
 PEN/EP:CAT
 Name: SR
 Date: 3.feb.98
 APP.: AF

ISSUE

REVISIONS

NAME

APPR.

RADIALL®

101. rue P. Hoffmann - Z.I Ouest -
 93116 ROSNY/BOIS Cedex-FRANCE
 Phone: 33(1)49353535
 Fax : 33(1)48546363
 Tlx RADIA 235220F