

2 W

DC- 4 GHz


SMA

COAXIAL ATTENUATOR

issue  
30. jul. 93

Page  
1 / 1

**DRAWING**

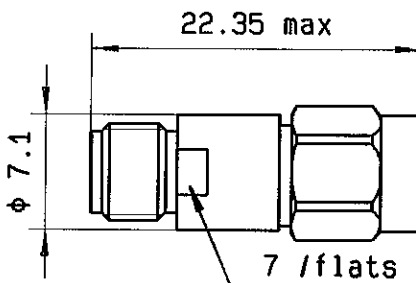

General tolerances: +/- 0.5 mm

**R F CHARACTERISTICS**

FREQUENCY RANGE : DC - 4 GHz  
 IMPEDANCE : 50 Ohms  
 ATTENUATION - NOMINAL : 13 dB

FREQUENCY	DC- 4 GHz
V.S.W.R	<= 1.15
DEVIATION (dB)	+0.5 / -0.5


TEMPERATURE SENSITIVITY :  $4 \times 10^{-4}$  dB /  $^{\circ}\text{C}$   
 PEAK POWER at 25°C (1 $\mu$ s, 1%) : 100 W  
 AVERAGE POWER at 25°C : 2 W

**MECHANICAL CHARACTERISTICS**

CONNECTORS : SMA male/female per MIL-C 39012  
 WEIGHT : < 5 g

**ENVIRONMENTAL CHARACTERISTICS**

OPERATING TEMPERATURE RANGE ( $^{\circ}\text{C}$ ) : -55 , +125  
 STORAGE TEMPERATURE RANGE ( $^{\circ}\text{C}$ ) : -55 , +125

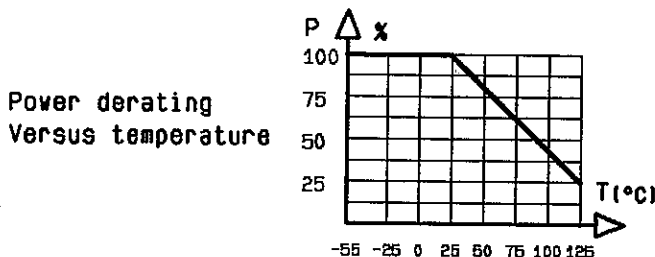

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

4112-9211

QUALITY	F39		
Dpt app	B		
CREATION			
PEN : CAT			
EP : -----			
Nom : DP	30. jul. 93	New format	HS
Date: 02. mar. 89	ISSUE	REVISIONS	NAME

**RADIALL®**

101. Philibert Hoffmann | Phone: 33.1.49353536  
 - Z.I Ouest - | Fax : 33.1.48546363  
 93116 ROSNY/BOIS Cedex-FRANCE | Tlx RADIA 235220F